






C30906013 LIST OF MATERIAL

ITEM	QTY.	PART NO.	DESCRIPTION	WEIGHT LBS.
1.	6	C30096006	GROUND ROD, 5/8 X 10'-0" GALV. STEEL	63
2.	6	C30097008	GROUND ROD CLAMP, 5/8"	1
3.	3	C30093000	GROUND LUG	1
4.	6	C30095103	WIRE 2/0 BARE STRANDED COPPER (25 FT.)	45
5.	3	C40012003	BOLT ASSEMBLY, 1/4 X 1 HEX S.S.	1
TOTAL WEIGHT				111

NOTES:

1. THERE SHALL BE A MINIMUM OF (6) GROUNDING ELECTRODES INSTALLED SYMMETRICALLY AROUND THE BASE OF THE STRUCTURE AT A MINIMUM 20 FT. SPACING.
2. ALL BENDS IN GROUND WIRE TO BE WELL ROUNDED CURVES FREE OF KINKS, TWISTS, ETC.

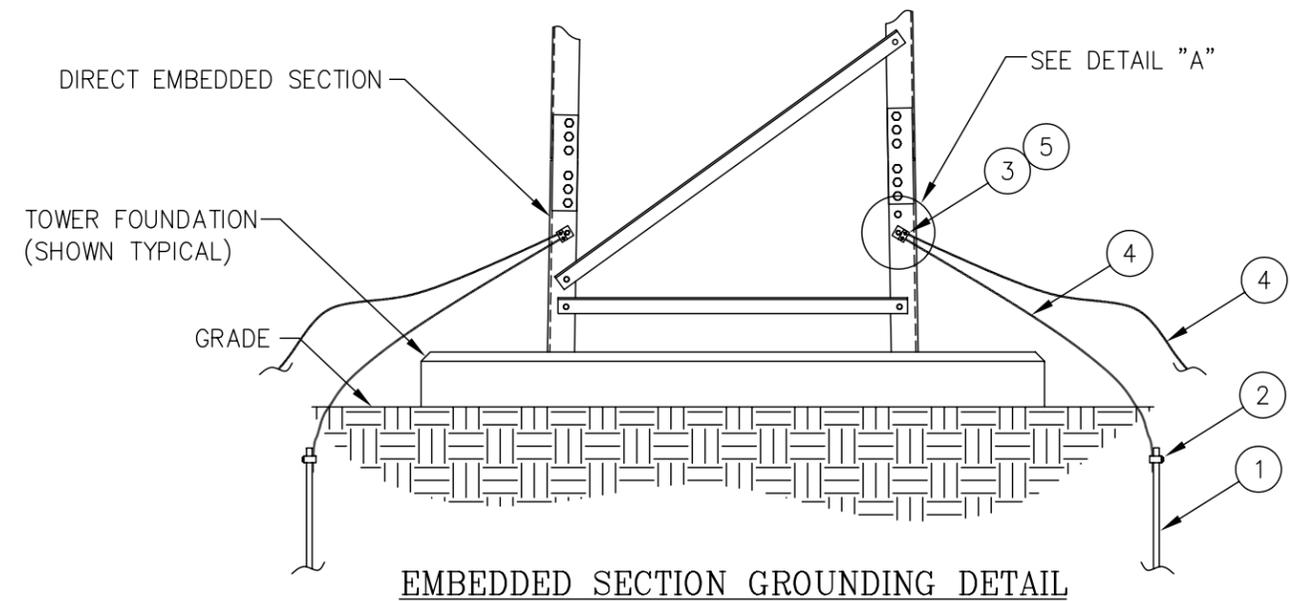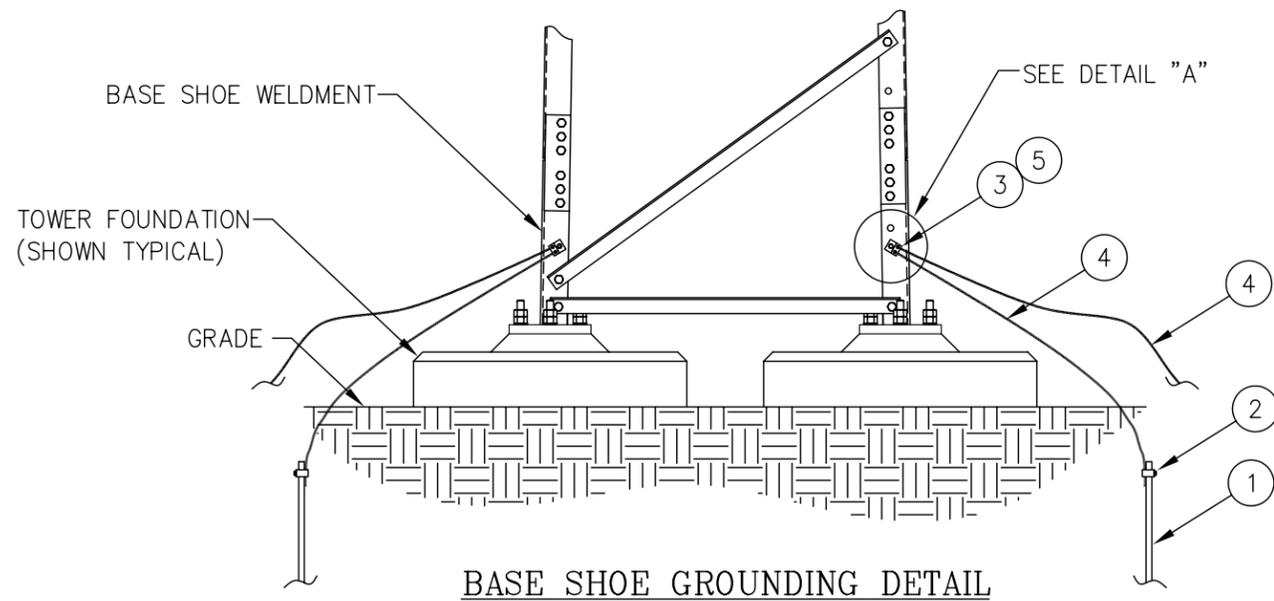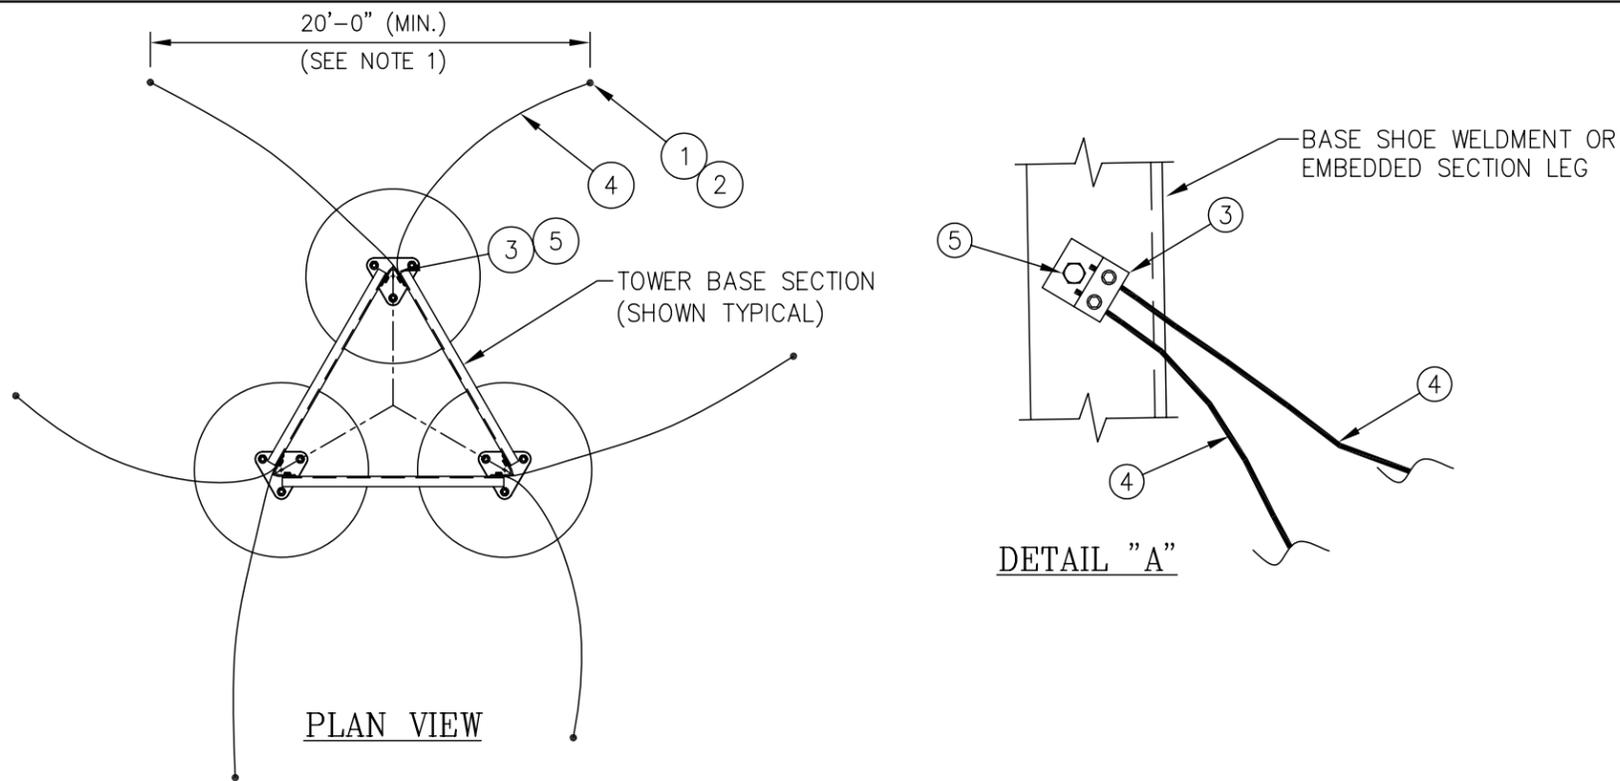

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS INCLUDE
FINISHES AND ARE IN INCHES

TOLERANCES: FRACTIONS $\pm 1/16"$
ANGLES $\pm 1/2$ DEG.
DECIMALS $\pm .010"$

MATERIAL:

TOLERANCES DO NOT APPLY
TO RAW MATERIAL



CONFIDENTIAL
This document and the information contained herein is the confidential trade secret property of Sabre Communications Corporation ("Sabre") and must not be reproduced, copied or used, in whole or in part, for any purpose without the prior written consent of Sabre.
© 2010 Sabre Communications Corporation. All rights reserved.

MODEL S3A SERIES LDA
GROUNDING INSTALLATION
(TIA REV. G)

REV	DATE	DRW/CHK	DESCRIPTION

DATE	3/8/10	SIZE	B	DRAWING NO.	C30906013	REV	0
DRAWN BY	KLE			SCALE	None	PAGE	1 OF 1
CHECKED BY	WRF						