



FIBERGLASS OMNIDIRECTIONAL ANTENNAS

FG8240

FIBERGLASS BASE STATION ANTENNAS FEATURE COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

TE Connectivity's fiberglass base station antennas are collinear designs enclosed in a high density fiberglass, which is covered with a protective ultraviolet inhibiting coating.

The radiating elements are made from high efficiency copper and are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a "cold" sleeve allowing great freedom in mounting. This high quality and well-focused beam provides the highest gain and best efficiency.

FEATURES AND BENEFITS:

- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance.
- Special UV Treated - stands up to the sun
- Durable gold anodized sleeve and cap with N Female connector
- Custom tuning available
- FedEx / UPS Shippable


APPLICATIONS:

- Omnidirectional (circular) outdoor antenna applications used by private organizations and government agencies around the globe.
- Typical applications include land based and marine radio and data transmissions for public safety agencies, commercial organizations, and defense agencies.


| ELECTRICAL | |
|--|--|
| Frequency Range | 824-896 MHz |
| VSWR | < 2:1 Max |
| Nominal Gain | 0 dBd |
| Maximum Power | 100 W |
| Nominal Impedance | 50 Ω |
| Polarization | Vertical |
| Pattern | Omnidirectional |
| Half-Power Beamwidth (Elevation° x Azimuth°) | 110° x 360° |
| Termination | N Female connector |
| Lightning Protection | Lightning Arrestor LABH350NN (Sold separately) |

MECHANICAL SPECIFICATIONS

| | |
|--|---|
| Height | 13-3/8" |
| Diameter | 1.310" |
| Weight | 0.65 lbs |
| Rated Wind Velocity | 125 mph (210 kph) |
| Rated Wind Velocity (with 0.5" radial ice) | 85 mph (137 kph) |
| Wind Resistance | 0.1217 sq. ft. |
| Mounting Information | Optional FM2SP Mounting Kit (Sold separately) |

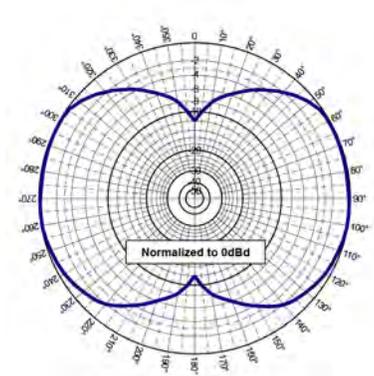

Elevation Pattern (Y, Z, or H-plane)

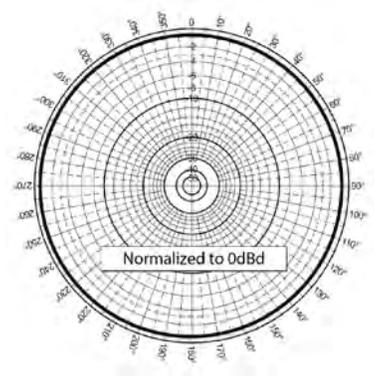

Elevation Pattern (Y, Z, or H-plane)

TE TECHNICAL SUPPORT CENTER

| | |
|-------------------|-----------------------|
| USA: | +1 (800) 522-6752 |
| Canada: | +1 (905) 475-6222 |
| Mexico: | +52 (0) 55-1106-0800 |
| Latin/S. America: | +54 (0) 11-4733-2200 |
| Germany: | +49 (0) 6251-133-1999 |
| UK: | +44 (0) 800-267666 |
| France: | +33 (0) 1-3420-8686 |
| Netherlands: | +31 (0) 73-6246-999 |
| China: | +86 (0) 400-820-6015 |

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original