



## **PDM24519**

### **3-Port MIMO Antenna**

### **2400-2500 MHz/5100-5900 MHz**

The PDM24519 antenna is a dual-band three-port directional antenna for use in 802.11n MIMO applications. Equipped with two vertically-polarized ports and a single horizontally-polarized port, the antenna is designed to take advantage of both polarization and spatial separation to enhance coverage areas populated with obstructions.

Housed in a compact, low-profile polycarbonate radome and equipped with an articulating arm the antenna can be wall mounted and oriented to take full advantage of the antenna's directionality.

The radiation patterns are uniform and symmetrical, providing high levels of signal density into defined coverage zones.

This antenna greatly enhances the performance of 802.11n systems where physical obstructions are anticipated. The dual band frequency coverage means that a single type of antenna can be deployed with any MIMO radio in the 2.4-2.5 GHz and 5.1-5.9 GHz bands.

### **FEATURES AND BENEFITS**

- Vertically and horizontally polarized radiating elements in a single solution
- Compact low-profile housing
- Equitable for both indoor and outdoor solutions
- Wide band 2.4-2.5 GHz and 5.1-5.9 GHz performance

### **APPLICATIONS**

- 802.11n MIMO
- Offices, hotels, and college campuses
- Airports and hospitals
- Bus terminals and train stations
- Museums, libraries, and retail malls
- Outdoor networks

## ELECTRICAL SPECIFICATION

Model Name	PDM24519-FNF	
Number of Ports	3	
Operating Frequency (MHz)	2400-2500	5150-5900
VSWR - Max	2:1	
Gain (dBi)	8.0	9.0
Vertical Port 1 to Vertical Port 2	17	33
Horizontal Port 1 to Vertical Port 1	33	>40
Horizontal Port 1 to Vertical Port 2	37	>40
Nominal Impedance (Ohms)	50	
Max Power - Ambient 25°C (W)	10	
Power Handling (W)		
Polarization	Horizontal (port 1); Vertical (ports 2 & 3)	
Vertical Plane 3 dB Beamwidth	45°	30°
Horizontal Plane 3 dB Beamwidth	90°	120°
Front-to-Back Ratio (dB)	20	

## MECHANICAL SPECIFICATION

Dimensions - mm (inches)	178.0 x 305.0 x 25.0 (7.0 x 12.0 x 1.0)
Weight - kg (lbs.)	0.69 (2.20)
Radome Material	Polycarbonate EXL9330 White




## ENVIRONMENTAL SPECIFICATION

Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

## CONFIGURATION

PART NUMBER	CONNECTOR
PDM24519-FNF	Surface Mount Type N Female

## MOUNTING OPTIONS

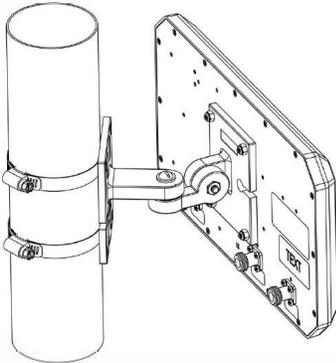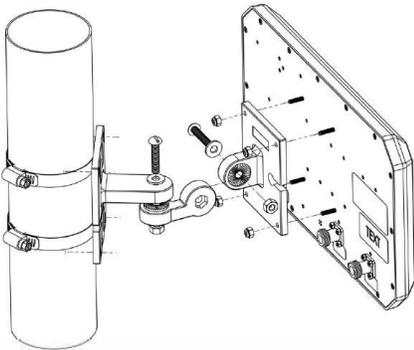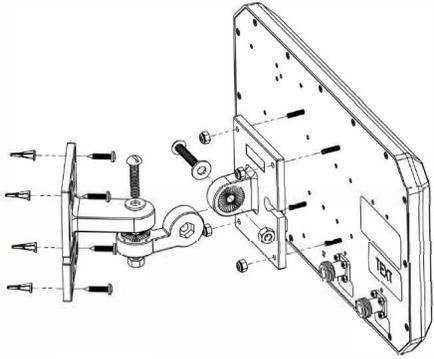

DISPLAY	DESCRIPTION	SIZE	QTY
	Flat washer	1/4"	2
	Hose clamp		2
	Articulating arm		1
	Wall/Mast mount		1
	Antenna mount		1
	Plastic wall anchor	#8	4
	SS machine screw	#8 - 18 x 3/4"	4
	Machine screw	1/4" - 20 x 1-1/4"	2
	SS split lock washer	1/4"	2
	SS hex nut	1/4" - 20	2
	SS/nylon hex nut	#6 - 32	4


### To assemble and mount the antenna, follow these steps:

- Using the four #6-32 nylon lock nuts to attach the molded antenna mount to the exposed studs on the back of the antenna.
- Using a 1/4" - 20 x 1-1/4" machine screw, lock washer, flat washer, and 1/4" - 20 hex nut, secure the molded arm to the antenna mount.
- For installation on a flat surface:**
  - Use the molded wall/mast mount as a template to mark hole locations on the flat surface
  - Drill four 3/16" diameter pilot holes and install wall anchors
  - Install the mount using four #8 - 18 x 3/4" self-tapping screws **For pole or mast installations:**
    - Attach the two hose clamps to the molded wall/mast mount. Encircle the pole with each clamp and tighten
- To attach the antenna assembly to the wall/mast, install a 1/4" x 1-1/4" machine screw, 1/4" lock washer, and 1/4" flat washer, as shown
- Use the screw to attach the free end of the articulating arm to the mount, securing in place with a 1/4" - 20 nut.
- Loosen the 1/4" pivot screws as needed to position the antenna for the desired azimuth and elevation steering. Once adjusted, tighten all hardware securely.

# RADIATION PATTERNS

## 2450 MHz

### Azimuth

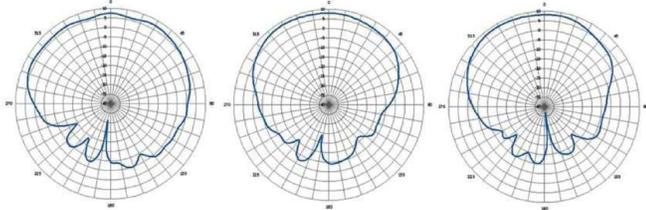


Port 1: H-pol

Port 2: V-pol

Port 3: V-pol

### Elevation

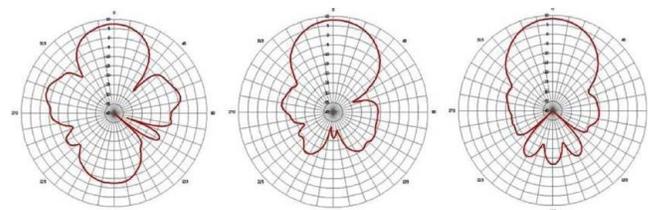


Port 1: H-pol

Port 2: V-pol

Port 3: V-pol

## 5550 MHz

### Azimuth

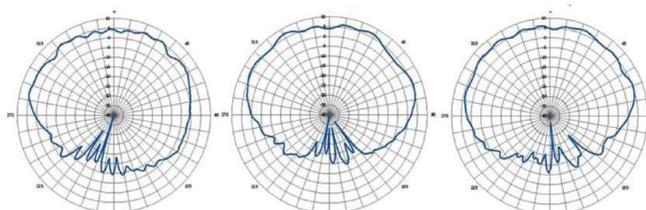


Port 1: H-pol

Port 2: V-pol

Port 3: V-pol

### Elevation

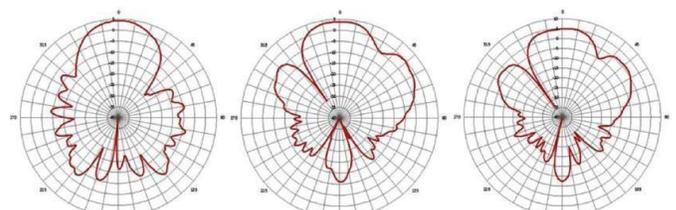

Port 1: H-pol

Port 2: V-pol

Port 3: V-pol

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original