



2.4/5 GHz Micro Omni MIMO Antenna with 2.5/4 dBi Gain and 4 RPTNC leads

Ventev's Dual Band Micro Omni MIMO Antenna is optimized for small form factor/aesthetic and mobile Wi-Fi applications. This aesthetically-pleasing antenna includes four dual-band Wi-Fi pigtails and RPTNC connectors. The antenna is an ideal partner for four connector dual-band Wi-Fi access points where low profile and/or aesthetics is a major deployment consideration. This multi-use antenna can also be used in vehicles for communications, location tracking, and fleet management. *Every TerraWave antenna is covered by the company's two-year TerraNet warranty program. For more information, contact a regional sales executive at 210-375-8482, 800-851-4965 or sales@terrawave.com, or visit www.terrawave.com.*




Specifications		
SKU	539824	
Model	M602504003D402MW	
Frequency Range	2400-2500 MHz	4900 - 5850 MHz
Bandwidth	100 MHz	950 MHz
Gain	2.5 dBi	4 dBi
VSWR	≤2	≤2
Impedance	50 ohms	
Polarization	Vertical	
Power	50 watts	
Connector	RPTNC male	
Leads	4 side-exit 12" leads	
Size	3.54" x 1.57"	
Weight	4.4 oz	
Operating Temperature	-40° F to +158° F	
Mounting Method	Surface Mount	
Ingress Protection	IP 56 compliant	


2.4/5 GHz Micro Omni MIMO Antenna with 2.5/4 dBi Gain and 4 Side-Exit RPTNC leads

Radiation Patterns

Port 1: 2450MHz

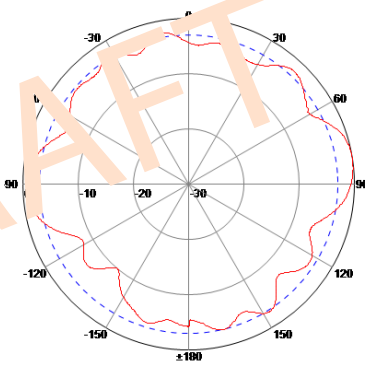


H Plane

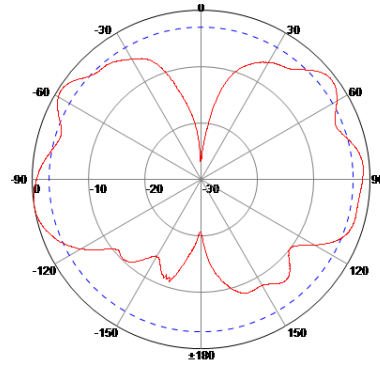


E Plane

Port 1: 5500MHz

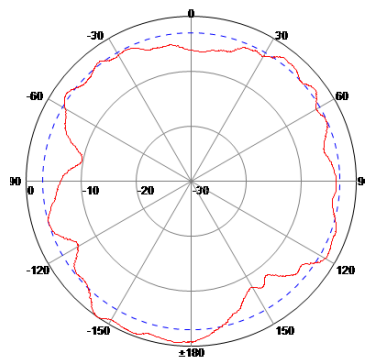


H Plane

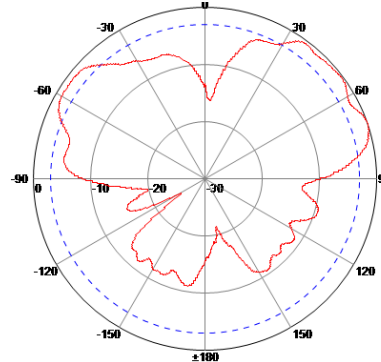


E Plane

Port 2: 2450MHz

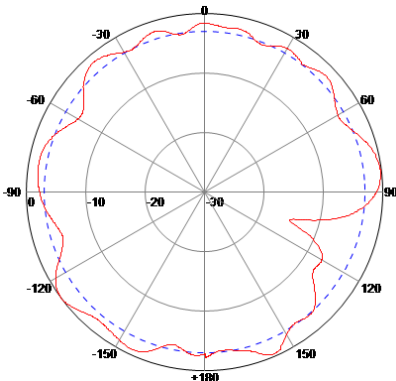


H Plane

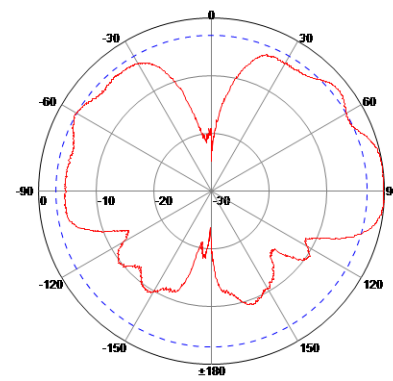


E Plane

2.4/5 GHz Micro Omni MIMO Antenna with 2.5/4 dBi Gain and 4 Side-Exit RPTNC leads

Port 2: 5500MHz

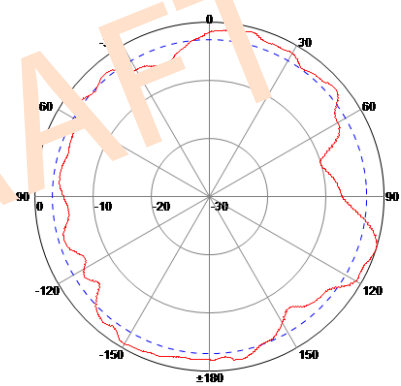


H Plane

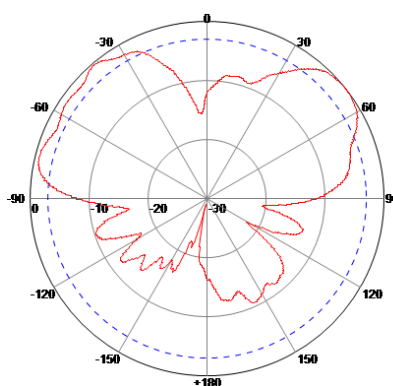


E Plane

Port 3: 2450MHz

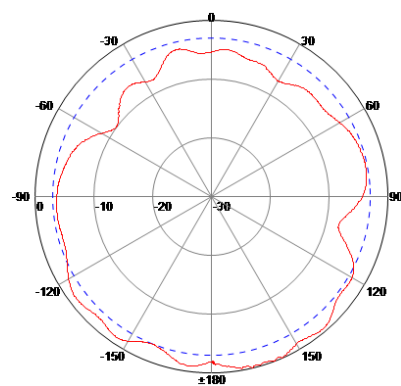


H Plane

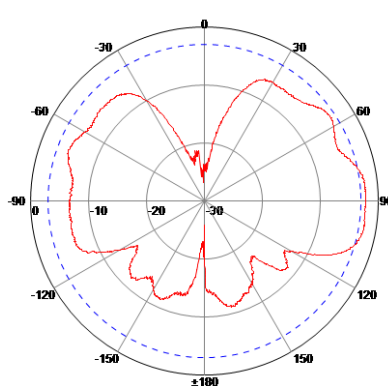


E Plane

Port 3: 5500MHz

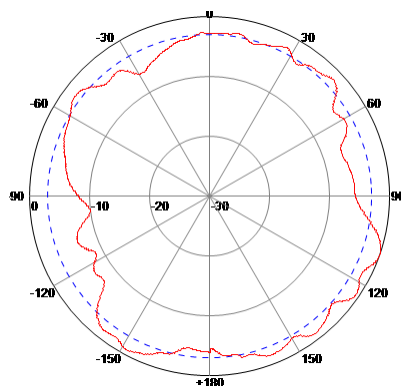


H Plane

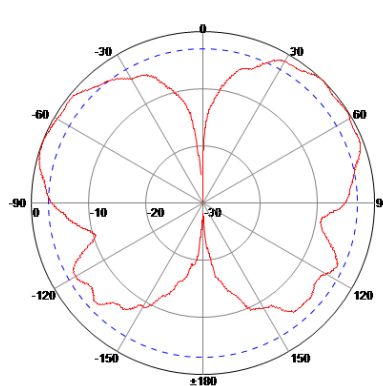


E Plane

2.4/5 GHz Micro Omni MIMO Antenna with 2.5/4 dBi Gain and 4 Side-Exit RPTNC leads

Port 4: 2450MHz

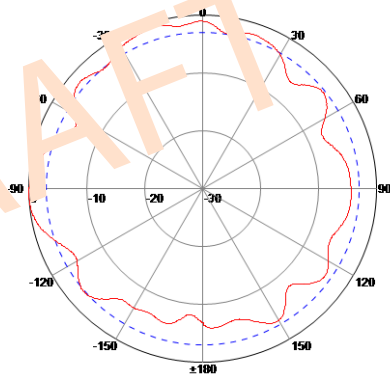


H Plane

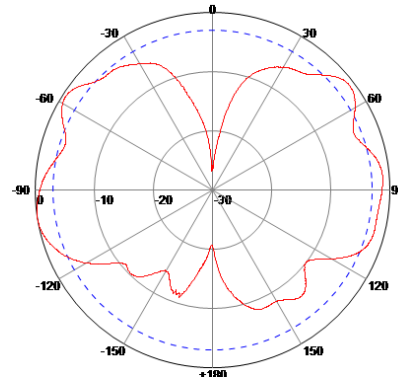


E Plane

Port 4: 5500MHz

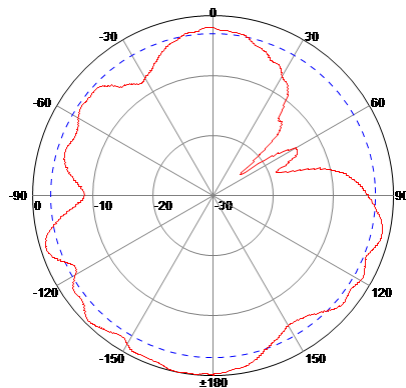

H Plane

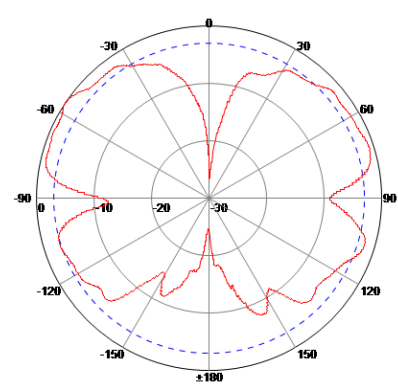

E Plane