


PSR-78-9537-U

Channelized 5W Digital Repeater for
Public Safety 700/800 MHz

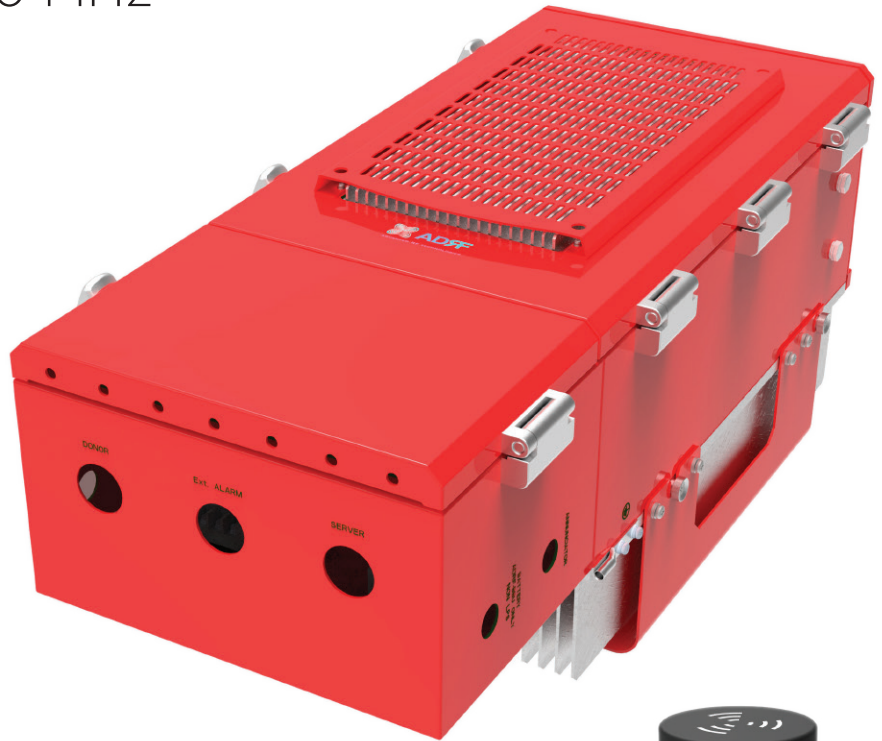

The PSR-78-9537-U is a revolutionary digital public safety repeater designed to protect the lives of first responders and building occupants.

The PSR-78-9537-U is certified to the highest level of code compliance through Underwriters Laboratories and is UL 2524 Listed for In-building 2-Way Emergency Radio Communication Enhancement Systems (ERCES).

Through the use of digital signal processing (DSP) filtering technology, the PSR-78-9537-U helps eliminate adjacent channel interference to allow band selectivity and support for 700 MHz and 800 MHz Public Safety frequencies including FirstNet. Up to two non-contiguous wideband and thirty-two non-contiguous narrowband filters can be supported in the 700 MHz and 800 MHz Public Safety frequencies via ADRF's celebrated web-based GUI, which provides versatility and total control to the user.

The PSR-78-9537-U is the best-in-class public safety repeater with FirstNet support and it is fully compliant with International Fire Code (IFC), National Fire Protection Association (NFPA), and Underwriters Laboratories (UL).

Product Features

- UL 2524 Listed Second Edition by Underwriters Laboratories as comprehensive solution with an annunciator and ADRF-BBx-U Series battery backups
- NFPA 72, NFPA 1221, IFC, and UL codes compliant solutions
- Alarming outputs to supervised circuits for Loss of Normal AC Power, Battery Charger Failure, Low Battery Capacity, Donor Antenna Malfunction/Disconnection, Active RF Emitting Device Malfunction, and System Component Malfunction
- New integrated wiring compartment with pre-drilled connector holes and terminal blocks for easy installation
- Type 4 (UL50/UL50E) Enclosure
- Supports FCC Part 90 Class A narrowband and Class B wideband repeater designation
- Up to 95 dB of gain and up to 37 dBm downlink and 30 dBm uplink output power per band
- Supports both analog and digital systems



Product Specifications

PSR-78-9537-U (Public Safety 700/800 MHz 5W Channelized Digital Repeater)

Electronic Specifications

Electronic Specifications		Downlink	Uplink
Frequency Range	FirstNet+ PS 700	758 - 768 MHz	788 - 798 MHz
		769 - 775 MHz	799 - 805 MHz
	PS 800	851 - 861 MHz	806 - 816 MHz
Composite Output Power	FirstNet / PS 700 / FirstNet + PS 700	37 dBm	30 dBm
	PS 800	37 dBm	30 dBm
	FirstNet + PS 700 + PS 800	40 dBm (37dBm + 37dBm)	30 dBm
System Gain		95 dB	95dB
Filter Selection	Wideband	2 (non-contiguous)	
	Narrowband (N Mode)	Up to 16 (non-contiguous) @ PS 700 Up to 16 (non-contiguous) @ PS 800	
	Narrowband (S1 Mode)	Up to 12 (non-contiguous) @ PS 700 Up to 20 (non-contiguous) @ PS 800	
	Narrowband (S7 Mode)	Up to 32 (non-contiguous) @ PS 700	
	Narrowband (S8 Mode)	Up to 32 (non-contiguous) @ PS 800	
Filter Bandwidth	Wideband	3, 5, 6, 10 MHz	
	Narrowband	12.5, 25, 75, 100, 150, 200 KHz	
Filter Roll-off	Wideband	60 dBc @ Filter Bandwidth Edge + 1 MHz	
	Narrowband	≥ 60 dBc @ Filter Bandwidth Edge + 3 x Filter BW	
Spurious Emission	FCC Rule Compliant		
Passband Ripple	± 2 dB		
ALC Dynamic Range	≥ 60 dB		
Gain Dynamic Range	45 dB		
Noise Figure	≤ 5 dB @ Max Gain		
System Group Delay	Wideband	≤ 6.5 μs	
	Narrowband	≤ 46 μs @ 12.5 KHz, ≤ 28 μs @ 25 KHz, ≤ 18 μs @ 75 KHz, ≤ 15 μs @ 100 KHz, ≤ 13 μs @ 150 KHz, ≤ 12 μs @ 200 KHz	
Power Supply	110 – 240 VAC, 60 Hz (Free Voltage, w/ battery backup function)		
Power Consumption	< 263 W		
Max RF Input Power without Over Drive	-20 dBm		
Max RF Input Power without Damage	+10 dBm		
Enclosure Cooling	Convection		
Impedance	50 Ω		
VSWR	< 1.5 : 1		
Dry Contacts	NFPA 1221 2016 Code Compliant		
Remote Alarming / Network Management	Dry Contacts, Web-GUI, SNMP (External Wireless Modem Required)		
Humidity	5% – 95% RH		
Operating Temperature	-40°F to +140°F (-40°C to +60°C)		
Certification	UL 2524 Listed FCC: Part 90 Class A / Class B		
Annunciator Decibel Level	100 dB @ 1m		
Uplink Squelch Control	Narrowband / Broadband: -110 to -80 dBm (5 dB step)		

Mechanical Specifications

Dimension (Repeater Annunciator)	12.0 x 11.9 x 28.0 in (w/o bracket) / 5.91 x 2.84 x 6.32 in (w/o bracket)
Weight (Repeater Annunciator)	72.7 lbs (w/o bracket) / 2.5 lbs (w/o bracket)
RF Connector	4.3-10 (Female)
Weather Resistance	Type 4 (UL50/UL50E)

Web www.adrftech.com

Tel +1 818.840.8131 **Fax** +1 818.840.8138

Technical/Customer Support +1 800.313.9345

3116 West Vanowen Street Burbank, CA 91505

