
PAF	RF-ATN-43MF-5W6						
REV	DESCRIPTION	DWN	DATE	APPROVED			
_	ENGINEERING RELEASE	CZS	08/19/19	JDMc			

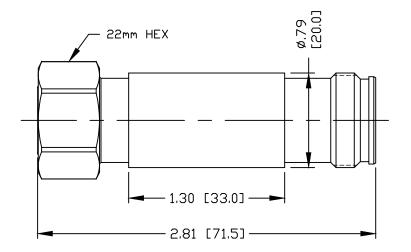

SPECIFICATIONS:

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-6 GHz AVERAGE POWER: 5 WATT VSWR MAX: ≤1.25 ATTENUATION: 6dB ACCURACY: ±0.5dB COLOR: BLACK

APPLICATION: INDOOR

OPERATING TEMPERATURE: -30°C TO +65°C

CONNECTORS WILL HAVE PROTECTIVE CAPS ON

OUTLINE DR	RAWING					
ALL DIMEN ARE REFEREN						
UNLESS OTHERWISE SPECIFIED:						
DIMENSIONS ARE IN INCHES AND [MILLIMETERS]						
DRAWN C. ZUNIGA	08/19/19	,				
CHECKED		1				
orj drawn C. ZUNIGA	08/19/19					

CUSTOMER

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS UNAUTHURIZEU USE IF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
CORDIVICUAL LAYS COPYRIGHT LAWS.



7610 MIRAMAR RD.

5 WATT ATTENUATOR 4.3/10 MALE TO 4.3/10 FEMALE 6dB

.	SIZE	CABLE	GROUP	DWG NO),			REVI	SION
s	4			RF	-ATN-43M	F-5W	6	_	_
	SCALE: NTS		ENGINEE	RING ID:	000000	SHEET	1	OF	1