




PC-4M

Weather Protection System: 4.3-10 Female Protective Cover



[Installation instructions](#)




[WPS cross-reference chart](#)



Contact technical support:
1-888-201-6073
techsupport@jmawireless.com

General	Specification	Comment
Dimensions in. (mm)	0.62 x 1.22 (15.75 x 30.99)	
Weight	0.065 lb 29.40 g	
Material	Silicone rubber, plated brass	
Reusability	Unlimited	
Line drawing details	1. 4F port seal 2. 4F port cap	

Environmental	Specification	Comment
Installation temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Operating temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Moisture resistance	No leakage	ANSI/SCTE 60 2004, IP-67, IP-68
Corrosion resistance	1000 hours	ASTM B117
U.V. resistance	Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps	
H.A.L.T.	40 hours	
Fire rating	UL94 HB	

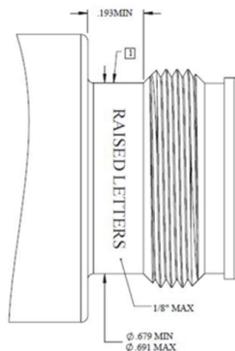

1 Compatible port dimensions

Surface should be free of flats, threads, or raised lettering whose characters are taller than 1/8" (3 mm).