



## B1323(S)

### Omnidirectional Antennas 132-525MHz

#### FEATURES AND BENEFITS

- 5/8 wave design for true 3 dBi performance
- Easy installation with optional NMO mounts
- Special UV-treated radome; resists sun damage
- 100% tested on a network analyzer

#### APPLICATIONS

- Mobile
- Amateur
- P25
- Public safety

#### ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	132 - 525
Number of Ports	1
VSWR	<2:1
Gain (dBi)	3
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	70° x 360°
Noise Suppressor	BlackHawk NS1535 1-35 VOLT, 15 Amp Noise Suppressor (Sold Separately) 

## MECHANICAL SPECIFICATIONS


Height - cm (inches)	144.8 (57.0) (see Cutting Chart)
Diameter - cm (inches)	3.66 (1.44)
Weight - kg (lbs.)	0.23 (0.5)
Equivalent Flat Plane Area (Wind Resistance - ft <sup>2</sup> )	0.025
Coaxial Cable Length and Type	None
Termination	NMO
Mounting	< 1000 MHz - PN: MB8, MAB8 DC to 6 GHz - PN: MB195 

## B1323 CUTTING


FREQUENCY	WHIP LENGTH	FREQUENCY	WHIP LENGTH
132	54-7/16"	154	43-3/4"
134	53-7/16"	156	43"
136	52-1/16"	158	42-1/4"
138	51-1/8"	160	41-5/8"
140	50-1/8"	162	41"
142	49-1/4"	164	40-3/8"
144	48"	166	39-3/8"
146	47-1/4"	168	38-3/8"
148	46-1/4"	170	37-3/8"
150	45-3/8"	172	36-5/8"
152	44-1/2"	174	35-7/8"

## B1323S CUTTING

FREQUENCY	WHIP LENGTH	FREQUENCY	WHIP LENGTH
132	52-7/8"	154	41-3/8"
134	51-15/16"	156	40-3/8"
136	50-3/8"	158	39-5/8"
138	49-1/8"	160	38-3/4"
140	48-1/8"	162	37-15/16"
142	47-1/4"	164	37-1/8"
144	46"	166	36-1/4"
146	45-1/8"	168	35-7/16"
148	43-7/8"	170	34-5/8"
150	43"	172	33"
152	42-1/4"	174	33"

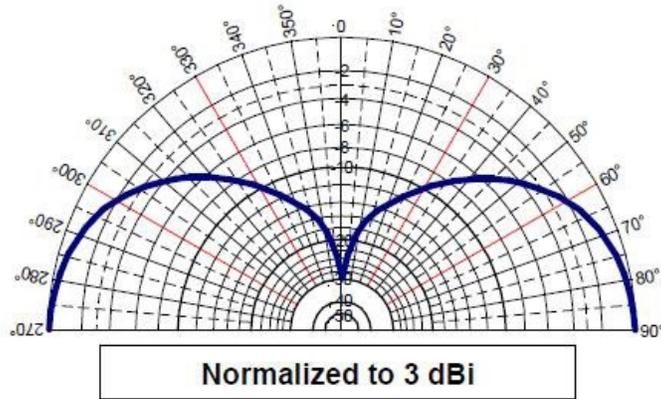

## VSWR OF B1323(S)

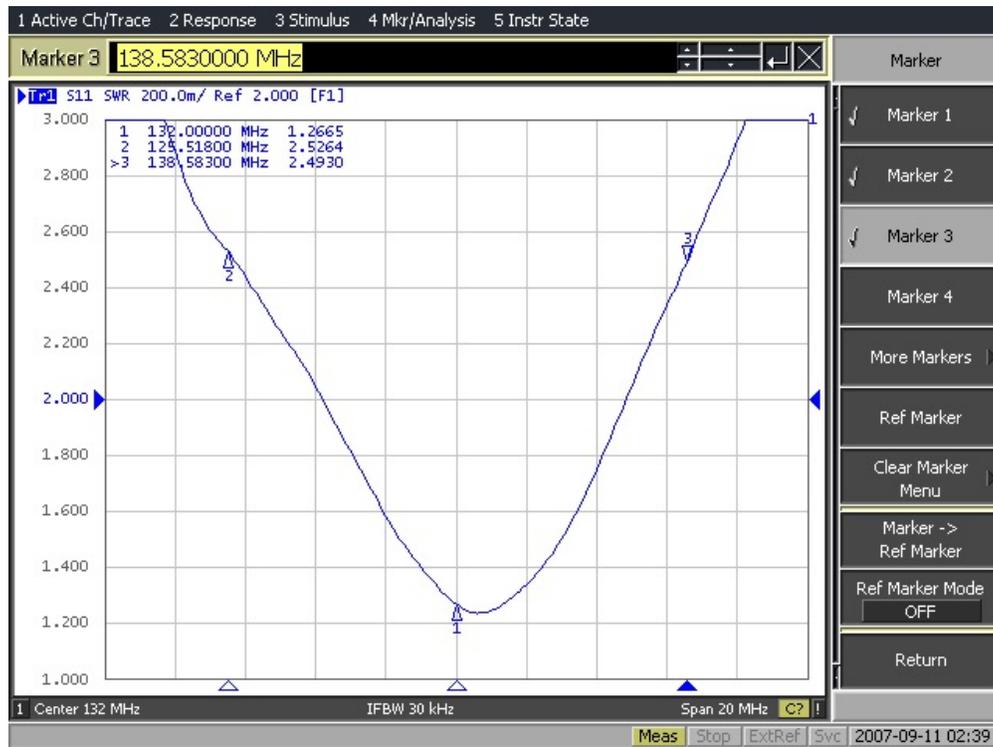

### ***B1323 Typical VSWR sweeps on a 4'x4' Ground Plane***

- Marker 1:** 1.2665 to 1@ 132.000 MHz
- Marker 2:** 2.5264 to 1@ 125.518 MHz
- Marker 3:** 2.4930 to 1@ 138.583 MHz

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 Original