



MTRA61274Cx2

M2M MIMO Antenna
617-960 MHz/1350-2700 MHz

The user experience requirements will become more demanding over the next couple of years. The resources of today's mobile broadband networks are becoming insufficient as operators offer broadband multimedia access anywhere to meet the increased demand. The MIMO Phantom MTRAxX antennas are multi-protocol to support multiple applications with one antenna and are new members of TE Connectivity's industry-leading Phantom series. They support high quality 2G, 3G, 4G, 5G, Cellular, ISM 868, ISM 900, SIGFOX, LoRaWAN, and the unlicensed 2.4 GHz band.

They are engineered for high reliability and they support 2x2 MIMO for better throughput. The MTRA61274Cx2 antenna is an excellent addition to new designs, or as a replacement for existing SISO phantom antennas suitable for both metallic and nonmetallic surfaces.

FEATURES AND BENEFITS

- Covers 617-960 MHz and 1350-2700 MHz
- 2G, 3G, 4G, 5G, Cellular, WLAN, ISM, SIGFOX, LoRaWAN, unlicensed 2.4 GHz
- Omnidirectional high gain patterns
- Rugged IP67 for vehicle and fixed installations

APPLICATIONS

- IoT and M2M
- Smart metering and AMI
- Remote monitoring and control
- Industrial and energy
- Automation, robotics, and AI

ELECTRICAL SPECIFICATIONS

Antenna Model	MTRA61274Cx2									
Number of Ports	2									
Operating Frequency (MHz)	617-698	698-824	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2180	2300-2500	2500-2700
Peak Gain - Average (dBi)*	2.4	3.1	2.8	2.7	2.7	3.6	3.9	3.5	3.6	2.9
Peak Gain - Max (dBi)*	3.2	4.0	4.0	3.4	4.7	4.1	4.1	4.2	4.0	3.4
Peak Gain- Max, No Ground Plane (dBi)	3.6	3.9	5.1	5.1	2.5	3.1	2.9	2.8	2.6	2.8
VSWR - Max*	2.5									
VSWR - Max, No Ground Plane	3.0									
VSWR Average*, Port 1	1.4	1.8	1.9	1.9	1.5	1.3	1.4	1.8	1.8	1.9
VSWR Average*, Port 2	1.4	1.8	1.9	1.9	1.5	1.3	1.4	1.8	1.8	1.8
Port-to-Port Isolation* (dB)	-8	-10	-10	-10	-15	-17	-18	-18	-18	-25
Port-to-Port Isolation, No Ground Plane (dB)	-7	-7	-8	-8	-15	-23	-22	-21	-24	-30
Nominal Impedance (Ohms)	50									
Polarization	Linear vertical									
Azimuth Beamwidth (°)	360, Omnidirectional									
Max Power - Ambient 25°C (W)	50									

* - Measured on a one-foot ground plane.

MECHANICAL SPECIFICATIONS

Dimensions - L x W x H - mm (inches)	130 x 84 x 95 (5.12 x 3.31 x 3.74)
Weight - g (oz.)	343 (12.1)
Radome/Baseplate Material	PC, UL94 V0 Rating, UV Stable

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Material Substance Compliance	RoHS
Ingress Protection	IP67 (when installed on a hard, flat surface)

CONFIGURATION


PART NUMBER	CABLE TYPE	CABLE LENGTH	CONNECTOR	COLOR
MTRA61274CB2-001	LMR*-195 or equivalent	610 mm (24 in.)	SMA- male	Black
MTRA61274CW2-001	LMR*-195 or equivalent	610 mm (24 in.)	SMA- male	White

Note: Specifications vary with different types of cable, different lengths of cables and connectors. Contact us for detailed specifications.

PACKAGING INFORMATION


PACKAGED DIMENSIONS	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	20	480	600
Height - cm (in.)	30.0 (11.8)	135 (53.2)	165 (65.0)
Length - cm (in.)	52.5 (20.7)	105 (41.3)	105 (41.3)
Width - cm (in.)	26.5 (10.4)	79.5 (31.3)	79.5 (31.3)
Shipping Weight - kg (lbs.)	7.36 (16.2)	190 (419)	230 (507)

MECHANICAL DRAWING



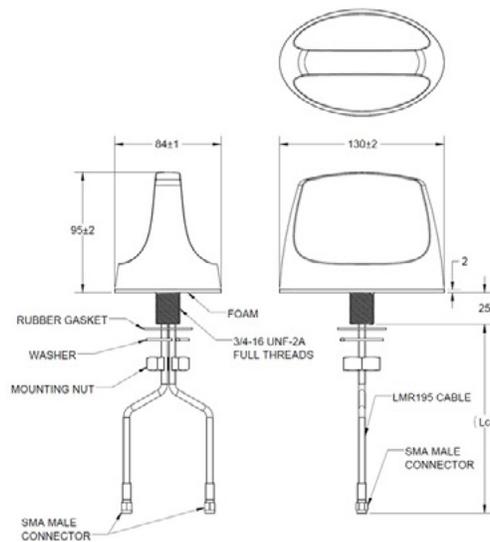


RADIATION PATTERNS- ON GROUND PLANE




633 MHZ

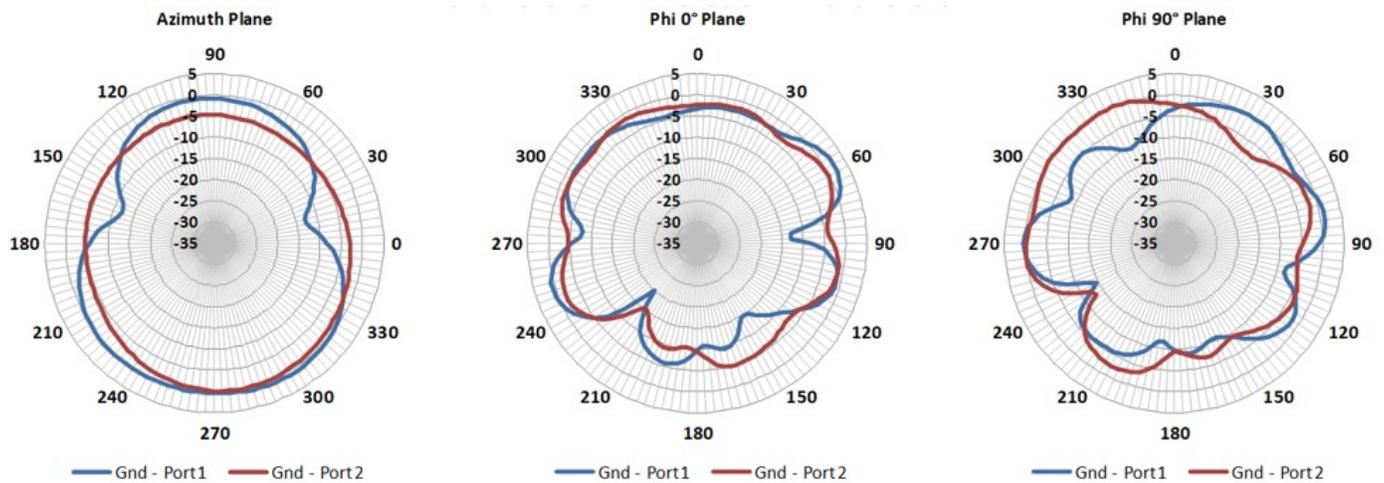

725 MHZ

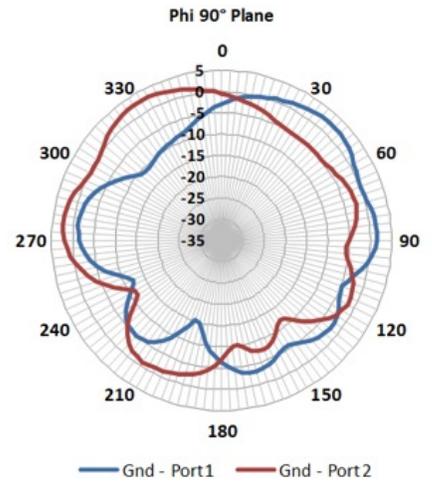
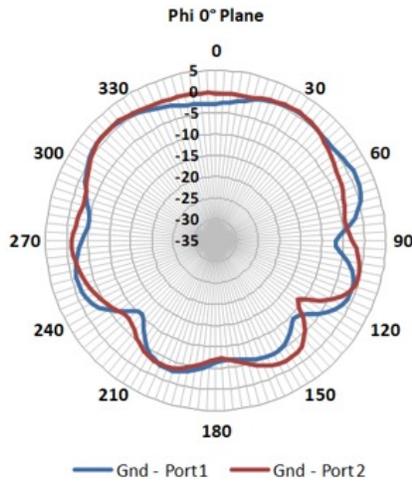
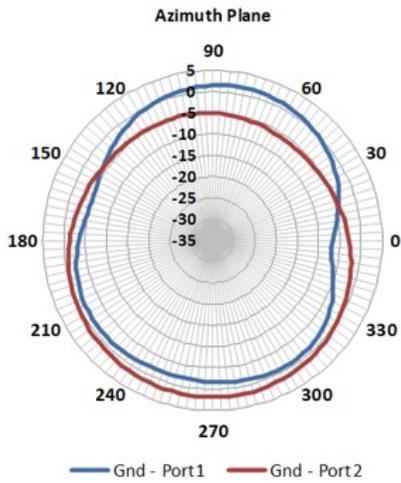


849 MHZ

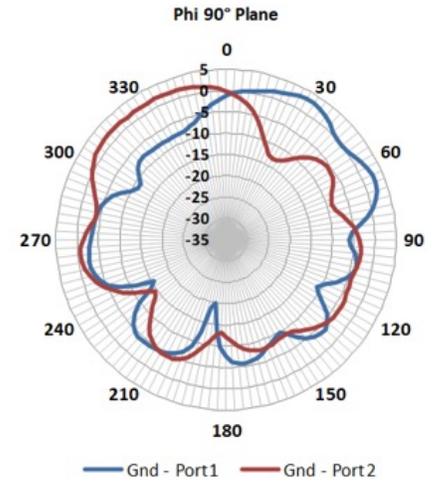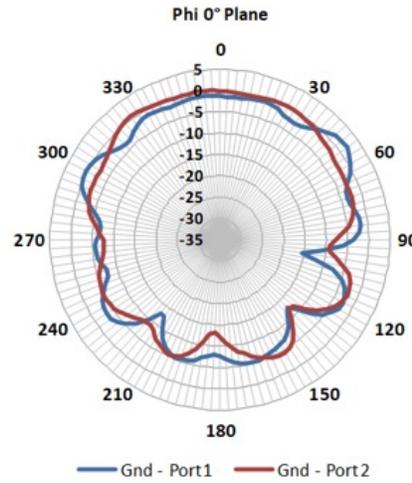
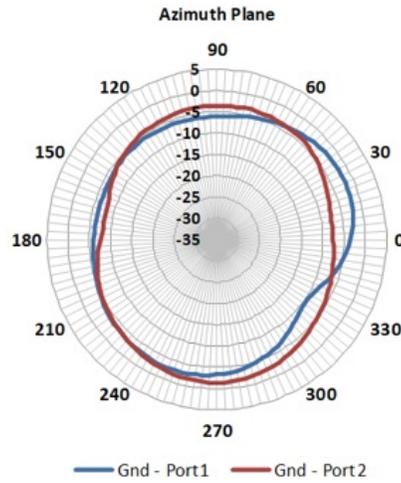


RADIATION PATTERNS- ON GROUND PLANE



925 MHZ

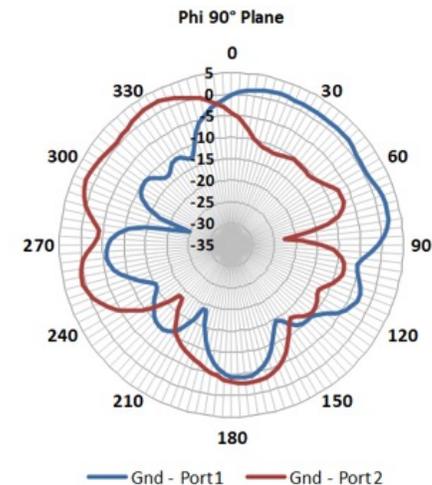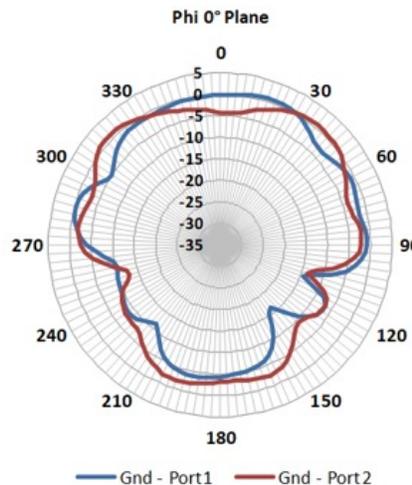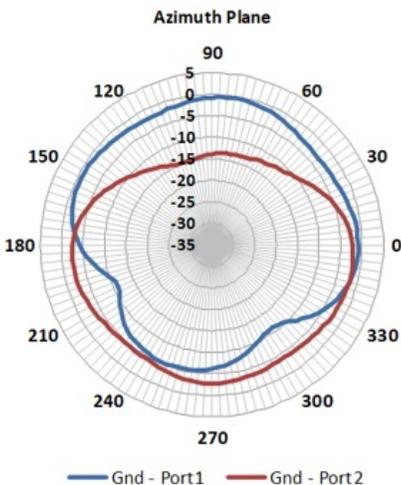

1448 MHZ

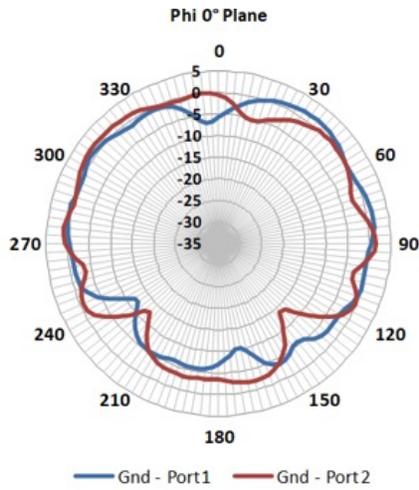
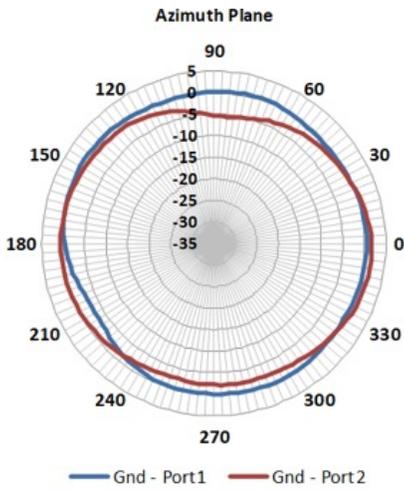


1730 MHZ


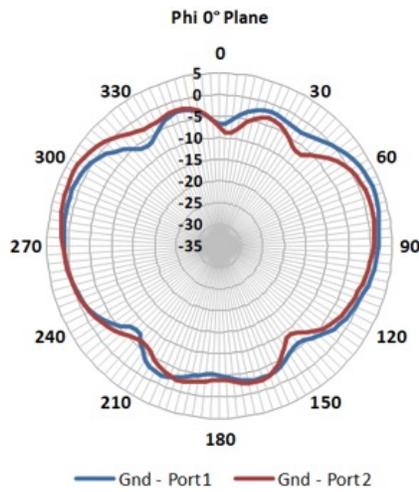
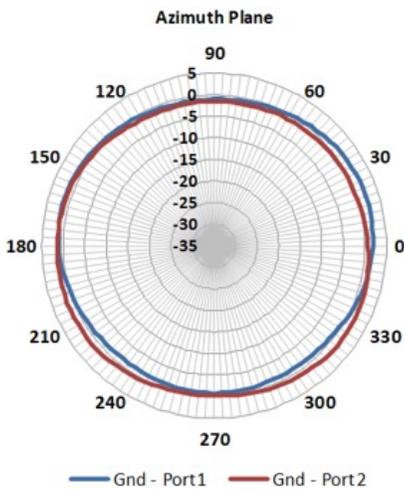


RADIATION PATTERNS- ON GROUND PLANE




1930 MHZ

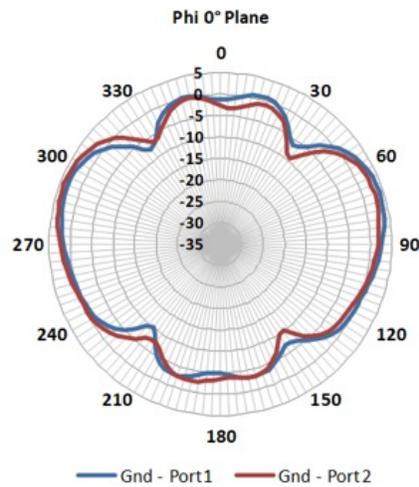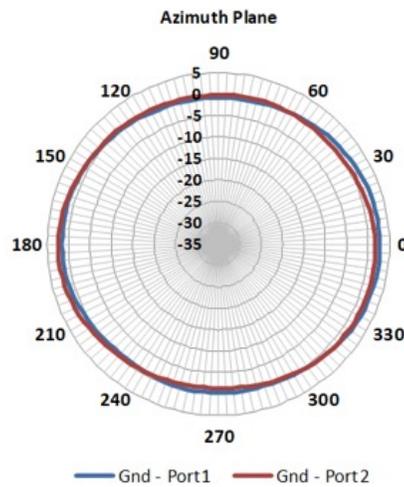

2140 MHZ

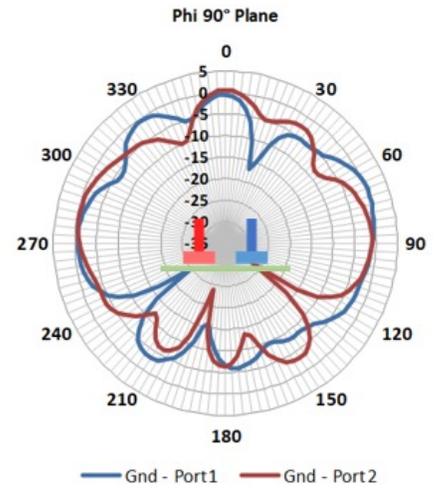
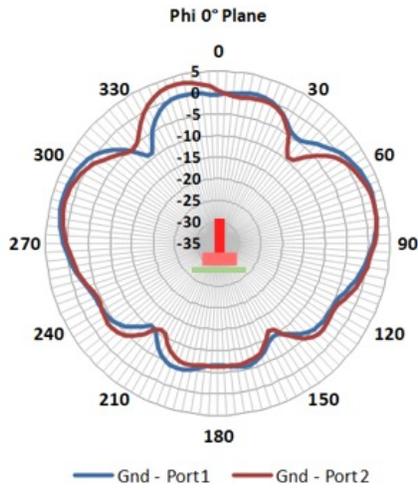
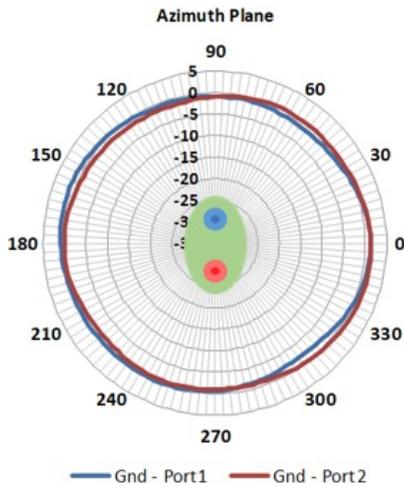


2300 MHZ

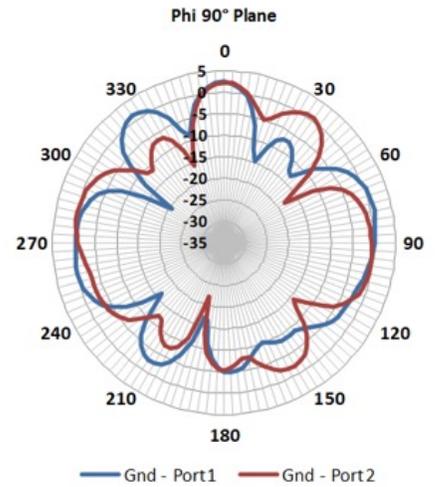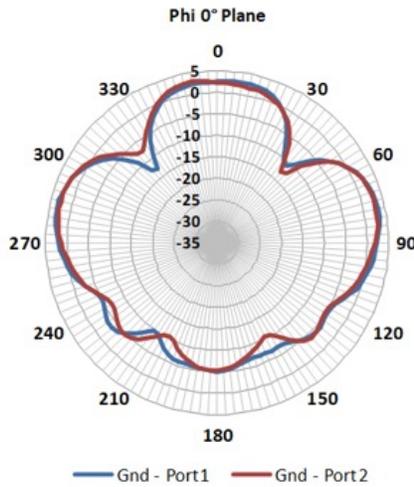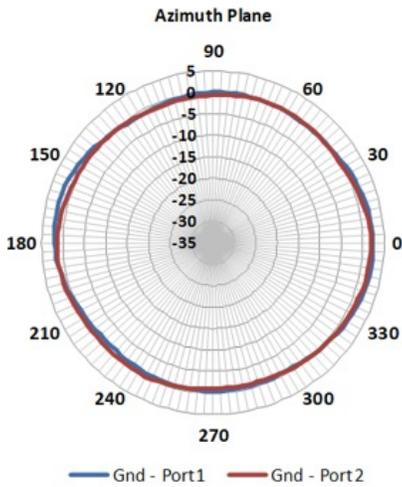


RADIATION PATTERNS- ON GROUND PLANE

2595 MHZ

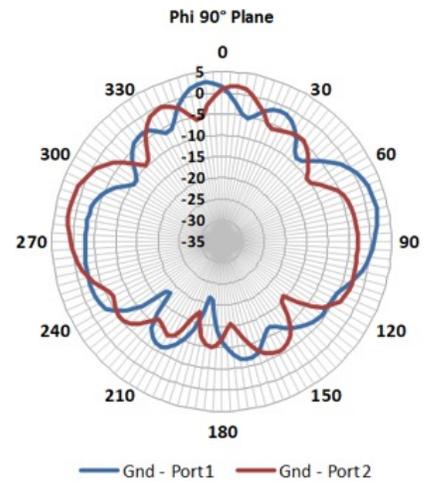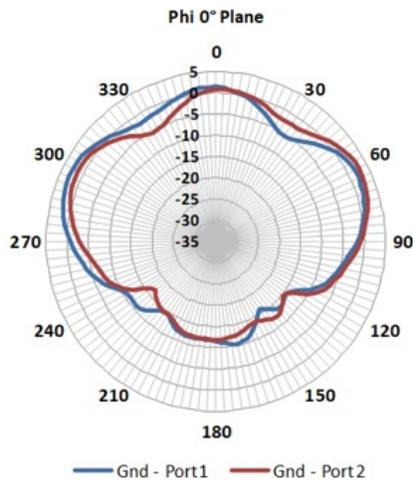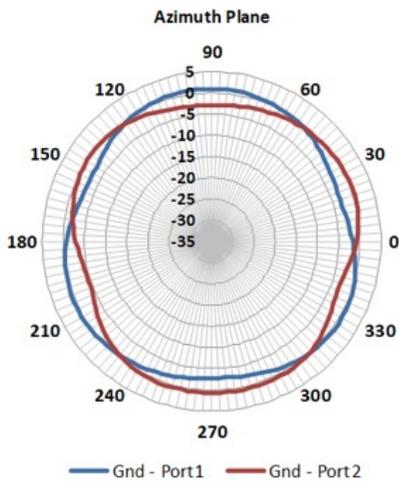


RADIATION PATTERNS- NO GROUND PLANE

633 MHZ

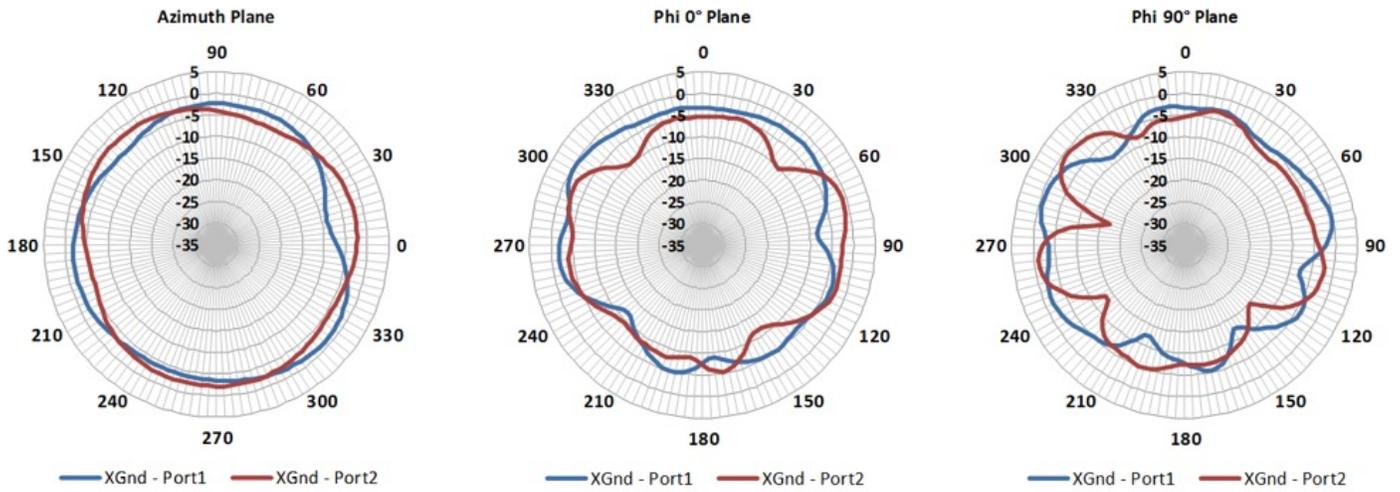


725 MHZ



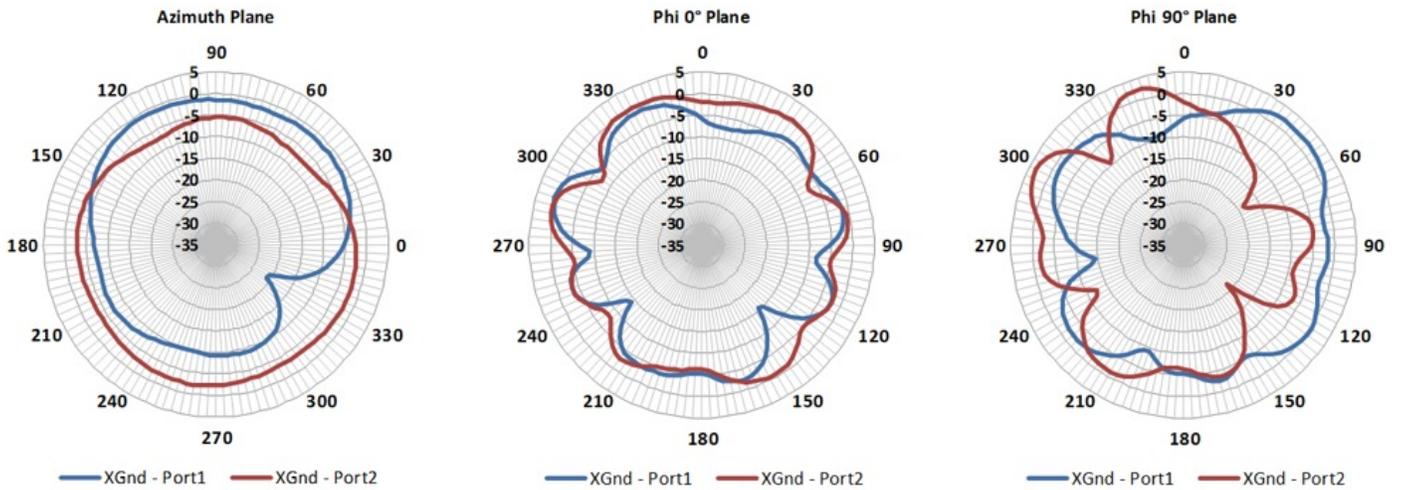


RADIATION PATTERNS- NO GROUND PLANE




849 MHZ

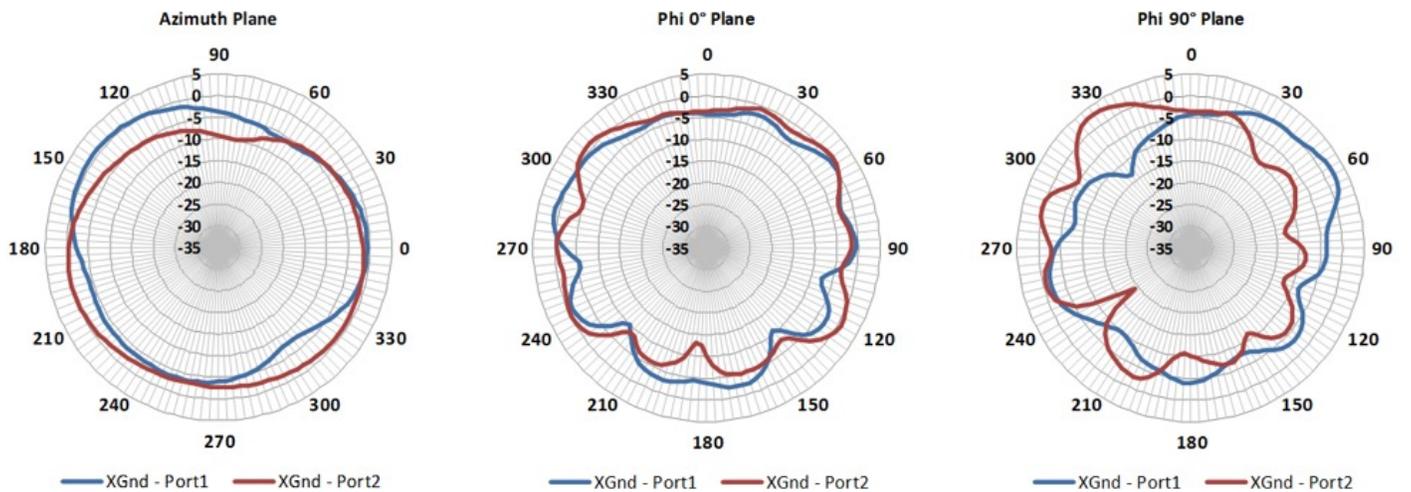

925 MHZ

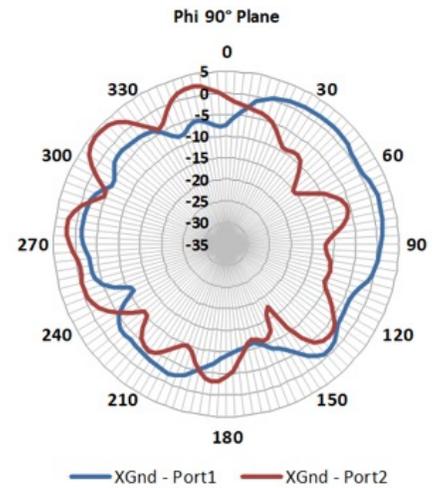
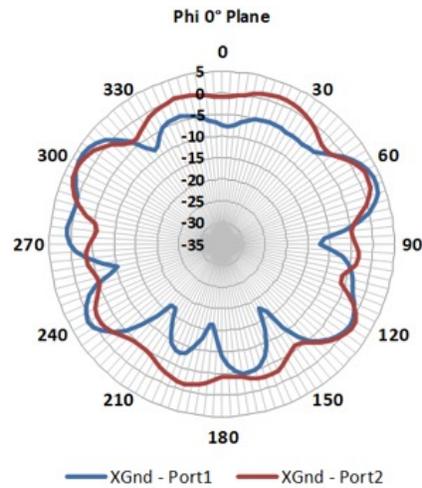
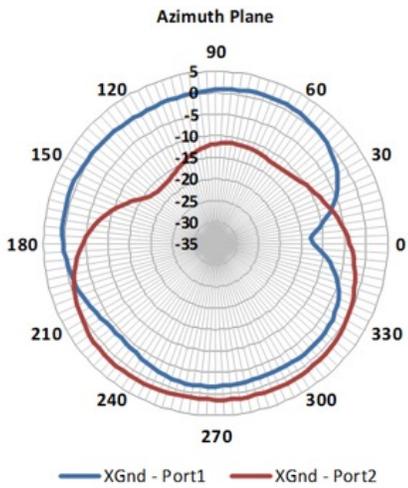


1448 MHZ

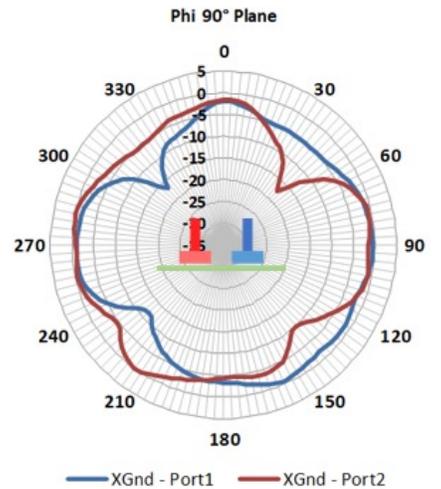
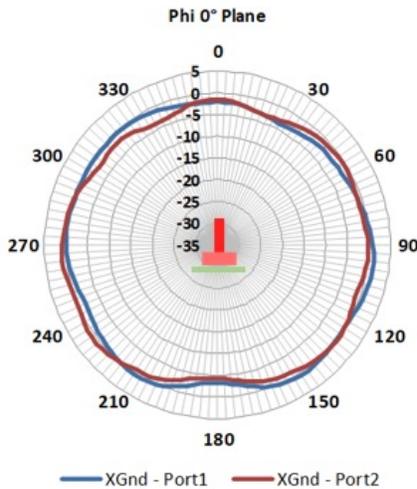
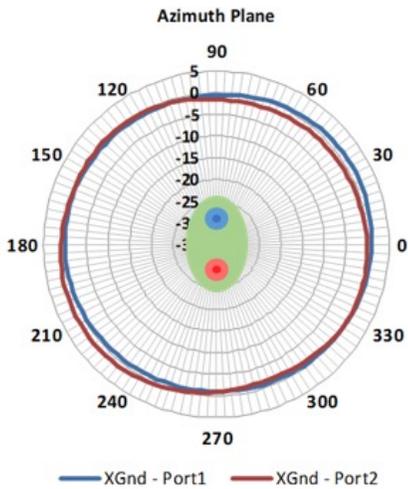


RADIATION PATTERNS- NO GROUND PLANE




1730 MHZ

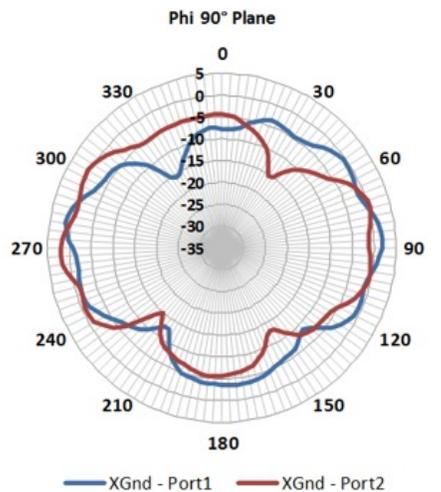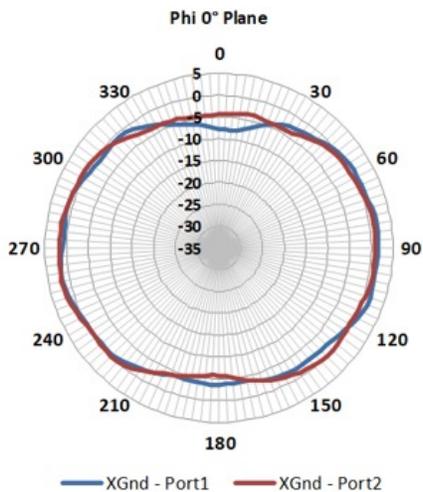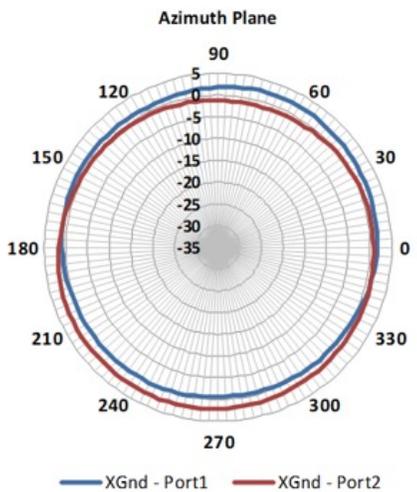

1930 MHZ

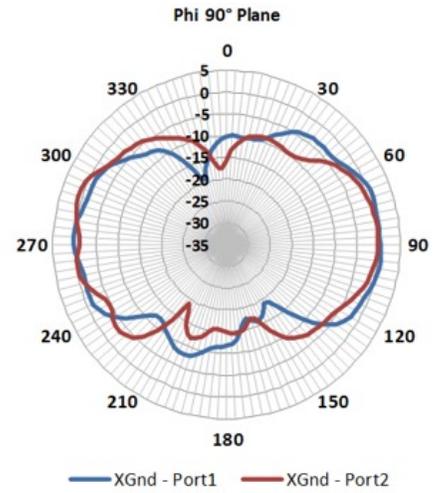
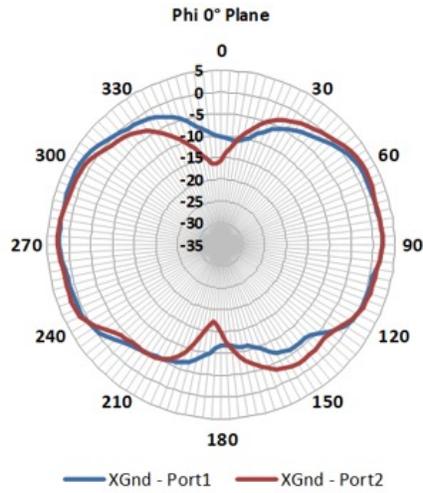
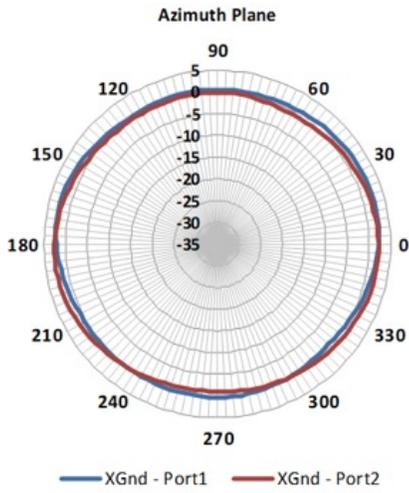


2140 MHZ

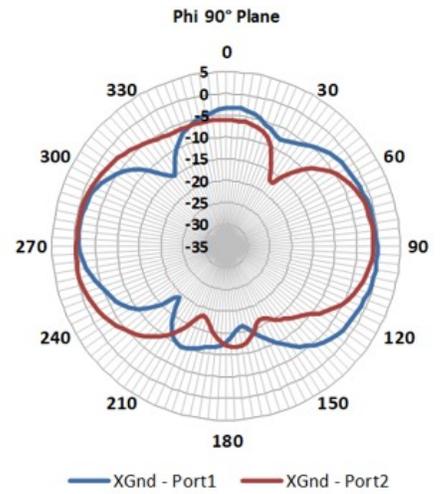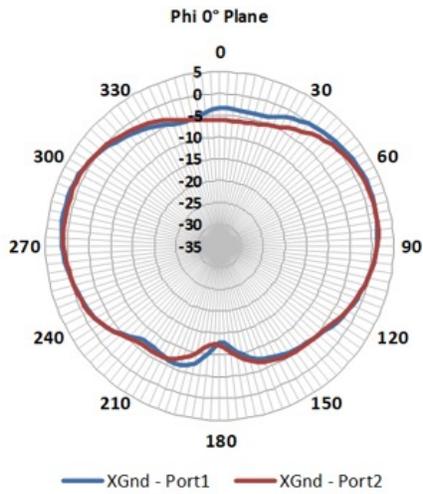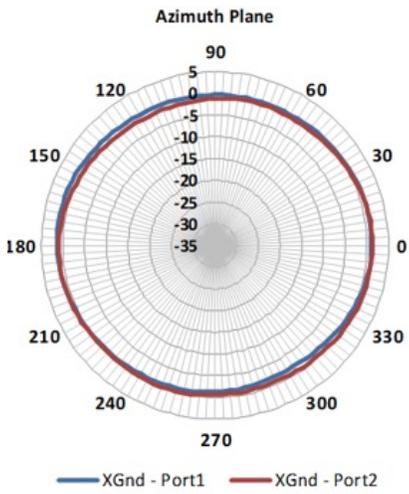


RADIATION PATTERNS- NO GROUND PLANE

2300 MHZ

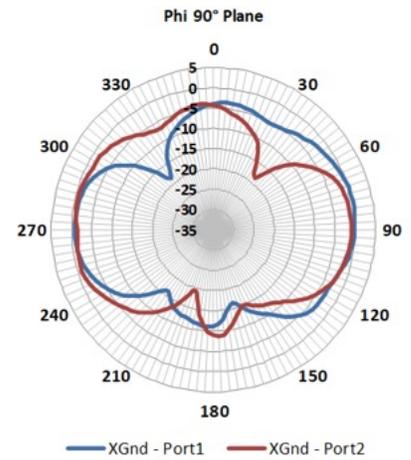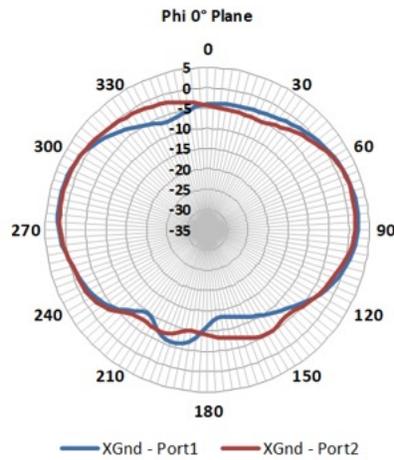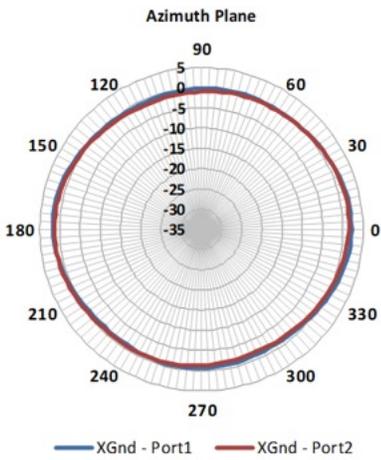

2595 MHZ

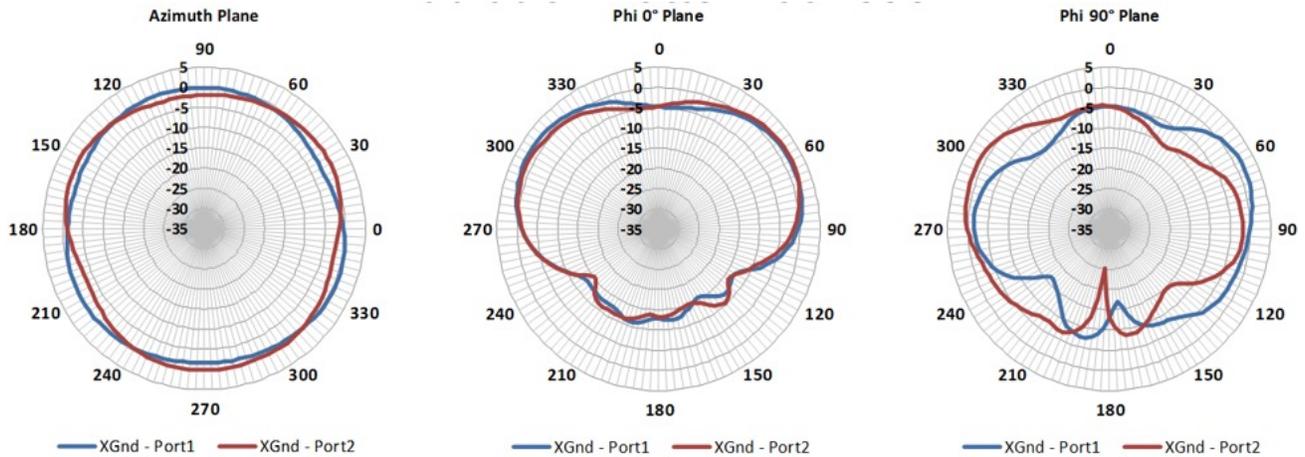

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 Original