



INDUSTRIAL-GRADE
DIGI XBEE® TO IP
GATEWAYS



CONNECTPORT® X2

Customizable, low-cost Digi XBee® to Ethernet gateways offer easy IP networking of RF devices and sensor networks

ConnectPort X2 is a small Digi XBee to Ethernet gateway that provides low-cost IP networking of RF devices and sensor networks. Featuring an easy development environment, ConnectPort X2 enables custom applications to run locally while interfacing across existing Ethernet networks for WAN connectivity to the internet.

ConnectPort X2 products feature an end-to-end development environment based on local customization via Python, allowing for rapid M2M-specific application development on the industry standard Python scripting engine. Digi ESP™


provides an IDE featuring device detection, debugging, compiling and downloading of Python code to Digi gateways.

Digi Remote Manager® provides a platform for the design, testing and deployment of M2M solutions. Using Digi Remote Manager, developers are able to seamlessly integrate remote devices and device data into business applications and processes.


BENEFITS

- Digi XBee to Ethernet IP gateways support numerous Digi XBee protocols
- Industrial grade enclosures for rugged environments
- Digi Remote Manager for secure, scalable access to an unlimited number of remote assets and seamless web services integration from Digi gateways into customer back office applications

APPLICATION EXAMPLE

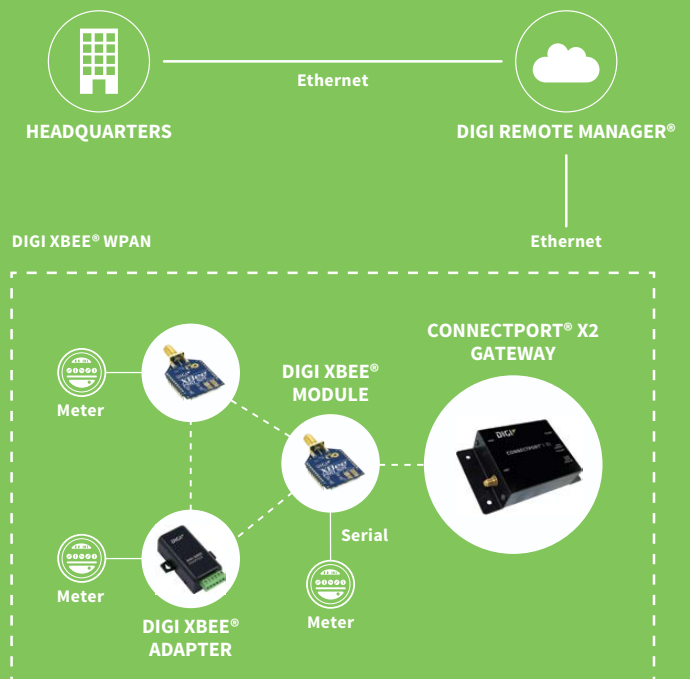

RELATED PRODUCTS

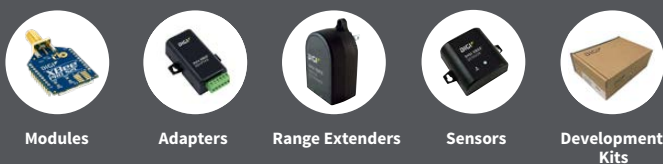

SPECIFICATIONS

ConnectPort® X2

GENERAL	
MANAGEMENT	HTTP/HTTPS web interface, Password access control, IP service port control, Optional secure enterprise management via Digi Remote Manager
PROTOCOLS	UDP/TCP, DHCP, SNMPv1
TOTAL MEMORY	8 MB Flash, 16 MB RAM
LEDS	Ethernet status, Power, ZigBee link/activity
SECURITY	SSL tunnels
DIMENSIONS (L X W X H) AND WEIGHT	5.50 in x 2.75 in x 1.13 in (13.9 cm x 7.0 cm x 2.9 cm); 0.44 lb (0.20 kg)
WIRELESS INTERFACES	
DIGI XBEE MODULE OPTIONS	802.15.4, ZigBee, DigiMesh 2.4, 900HP, XSC, 868
ANTENNA PORT	RPSMA female
ETHERNET	
PORTS	1 RJ-45 port
PHYSICAL LAYER	10/100Base-T
DATA RATE AND MODE	10/100 Mbps (auto-sensing); Full or half duplex (auto-sensing)
POWER REQUIREMENTS	
POWER INPUT	9-30 VDC
POWER SUPPLY	12 VDC power supply for 0° C to 60° C (32° F to 140° F) with locking barrel connector included; Extended temperature power supply available separately
POWER CONSUMPTION	Idle: 1.2 W, Max: 3.4 W
SURGE PROTECTION (W/INCLUDED POWER SUPPLY)	4 kV burst (EFT) per-4-4, 2 kV surge per EN61000-4
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30° C to +70° C (-22° F to +158° F)
RELATIVE HUMIDITY	5% to 95% (non-condensing)
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263
REGULATORY APPROVALS	
SAFETY	EN60950
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A)

PART NUMBERS

DESCRIPTION

X2-Z11-EM-A	ConnectPort X2 - Digi XBee (ZigBee) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-Z11-EM-W	ConnectPort X2 - Digi XBee (ZigBee) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)
X2-A11-EM-A	ConnectPort X2 - Digi XBee (802.15.4) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-A11-EM-W	ConnectPort X2 - Digi XBee (802.15.4) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)
X2-HMA-EM-W	ConnectPort X2 - Digi XBee-PRO 900HP to Ethernet. Industrial enclosure. Antennas and power supply included, for Australia. (International)
X2-HMU-EM-A	ConnectPort X2 - Digi XBee-PRO 900HP to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-M11-EM-A	ConnectPort X2 - Digi XBee (DigiMesh 2.4 GHz) to Ethernet. Industrial enclosure. Antennas and power supply included.
X2-M11-EM-W	ConnectPort X2 - Digi XBee (DigiMesh 2.4 GHz) to Ethernet. Industrial enclosure. Antennas and power supply included. (International)
X2-HMU-EM-B	ConnectPort X2 - XBee-PRO 900HP to Ethernet. Industrial enclosure. Antenna (A09-HASM-675) and international power supply (24000091) included, for Brazil.

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001647
I7/918

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

