

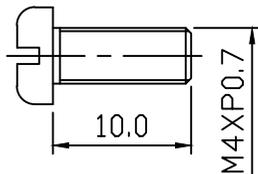
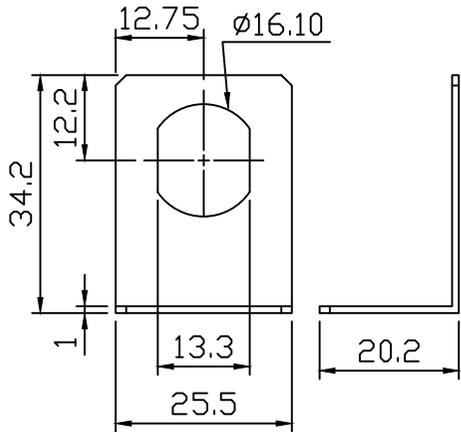
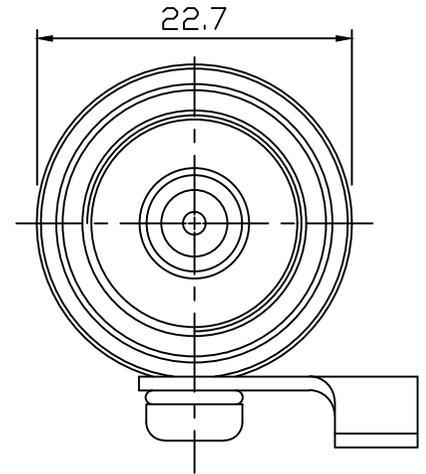
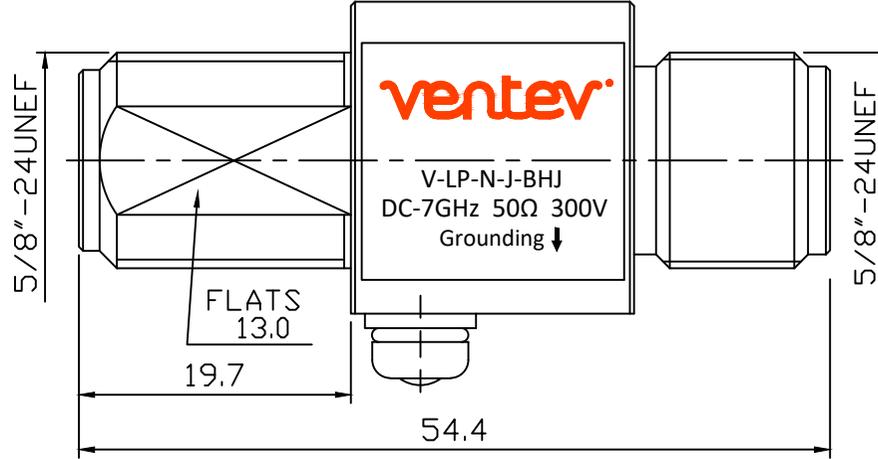


REVISION		
ISS	ZONE	DESCRIPTION

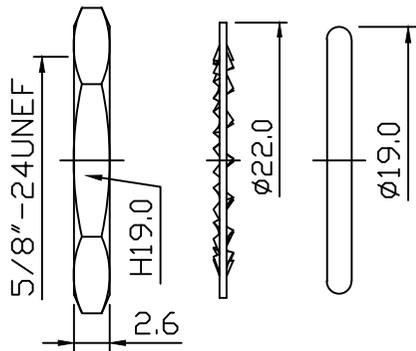

NOTE:

- 1.Impedance: 50Ω
- 2.Frequency Range: DC 0-7 GHz
- 3.Max RF POWER: 90W/CW @ 30 MHz  
9W/CW @ 3 GHz
- 4.V.S.W.R: 1.1 Max @ 3 GHz  
1.2 Max @ 4 GHz  
1.4 Max @ 7 GHz
- 5.Insertion Loss: -0.1 dB Max @ 4 GHz  
-0.25 dB Max @ 7 GHz
- 6.Gas Tube DC Spark Over Voltage: 300V
- 7.Gas Tube Impluse Discharge Current (Wave 8/20 uS)  
10 Times (5 Times Each Polarity) : 10KA
- 8.Operating Temperature Range: -55°~105°C
- 9.Using Ingress Protection (IP) Ratings:67
- 10.Interface in Accordance With: MIL-STD-348A
- 11.RDHS Compliance.



Bulkhead  
Mounting Hole

14	SCREW A	IRON	NICKEL	1	M-0248
13	WASHER	STAINLESS STEEL	NONE	1	M-0330
12	TERMINAL	BRASS	TIN	1	M-0285
11	GASKET	SILICONE	RED	1	R-0033
10	BODY A	BRASS	NICKEL	1	10904033B
9	GAS TUBE	NONE	NONE	1	□-0041-1
8	INSULATOR A	PTFE	NONE	2	T-0403-1
7	CENTER CONTACT	BRASS	NICKEL	1	10904033C
6	BODY A	BRASS	NICKEL	1	10904032B
5	GASKET	SILICONE	BLACK	1	R-0006
4	WASHER	BRASS	NICKEL	1	G-0005
3	NUT	BRASS	NICKEL	1	D-0005
2	SCREW B	IRON	NICKEL	2	M-0235
1	BRACE	A.L.	NONE	1	□-0122
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.

TOLERANCES  
DIMENSIONS ARE IN MILLIMETER

UNLESS OTHERWISE SPECIFIED

.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLES	±5°

TITLE  
N JACK BULKHEAD TO N  
JACK LIGHTNING PROTECTOR

PART NO.  
V-LP-N-J-BHJ

DRAWN NO.  
10904033A

FILE PATH:

**ventev**

APPROVED *Pony* DATE 10.16.20"

CHECKED *Alvin* DATE 10.16.20"

DRAWN *Chikerphy* DATE 10.16.20"