



Polarization

H

- All-purpose panel for mounting by fixations or to square steel spines.


Order No.	75010210
Input	7-16 female straight
Max. power	1.2 kW (at 40 °C ambient temperature)
Frequency range	470 – 862 MHz
VSWR	< 1.1
Gain (at mid-band)	11.5 dBd
Impedance	50 Ω
Polarization	Horizontal
Weight	8.5 kg
Wind load (at 160 km/h)	Frontal: 565 N Rearside: 815 N Lateral: 250 N
Max. wind velocity	225 km/h
Attachment	Plate

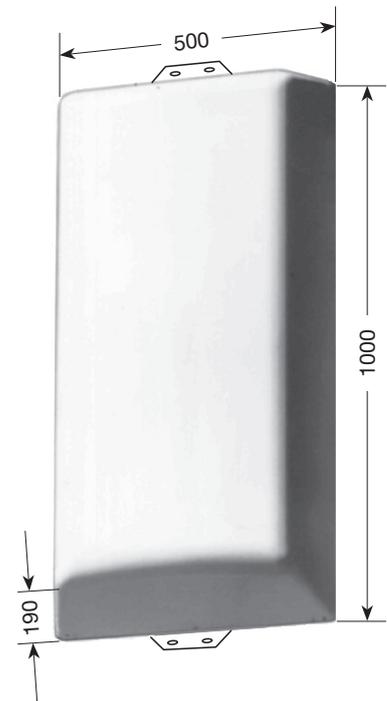

Horizontal polarization


- Material:** Reflector screen and dipoles: Weather-resistant aluminum. Protective cover: Fiberglass. Attachment plate: Hot-dip galvanized steel.
- Radome color:** RAL 9016 (traffic white), other radome colors on request.
- Mounting:** Using M 8 x 35 screws (supplied) to suitable attachment construction. Further mounting accessories upon request (please order separately).
- Grounding:** Via mounting parts.
- Ice protection:** The dipoles remain fully functioning even in icy conditions as the fiberglass cover protects the whole antenna.

Radiation Patterns (at mid-band)

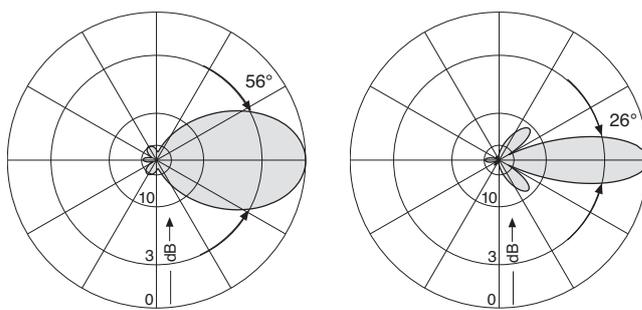

Horizontal Radiation Pattern

Vertical Radiation Pattern

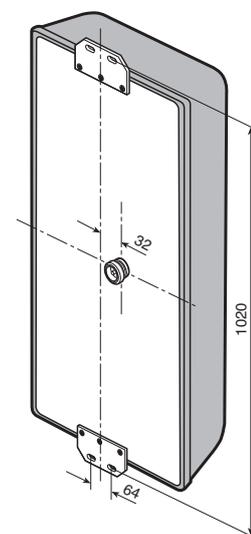

All dimensions in mm

936.4917 Subject to alteration.

Please note:

As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.

The mechanical design is based on the environmental conditions as stipulated in ETS 300 019-1-4 and thereby respects the static mechanical load imposed on an antenna by wind at maximum velocity.

Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of an antenna or even cause it to fall to the ground.

Cylindrical bodies can show crosswind response, which can cause the supporting structure to oscillate and to be damaged. Prismatic bodies, even with non-circular cross-section can show crosswind response, which can cause the supporting structure to oscillate (see EN 1991-1-4 or EN 1993-3-1).

These facts must be considered during the site planning process.

The maximum wind velocities listed should be understood in the sense of working values according to DIN and EN standards. These values include a safety factor (1.5) below the ultimate limit state (elastic limit or permanent deformation). For these wind velocities we guarantee the mechanical safety and the electrical integrity of our antennas.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

The details given in our data sheets have to be followed carefully when installing the antennas and accessories.

The limits for the coupling torque of RF-connectors, recommended by the connector manufacturers must be obeyed.

Any previous datasheet issues have now become invalid.

Our quality assurance system and our environmental management system apply to the entire company and are certified by TÜV according to EN ISO 9001 and EN ISO 14001.

