Product Data Sheet

KPPA-900DPY14

902 MHz to 928 MHz, Yagi Antenna, 14dBi, 2-Port

- Aircraft Quality 6061-T6 Aluminum with 5/16'' Elements Compression Crimped Welded to a 1'' Boom
- Powder-Coated Balck for Corrosion, Fade, and Ice-Build Up Resistance
- Adjustable Polarization between Horizontal/Vertical and +/-45 Slant

Electrical Specification

Frequency Band	MHz	900-928
Gain	dBi	14.5
Polarization		Horizontal/Vertical or ±45° Slant
Horizontal HPBW	Degree	35
Horizontal Squint	Degree	±2
Vertical HPBW	Degree	40
Front-to-Back Ratio @ 180°±30°	dB	18
Cross-polarization Ratio over HPBW	dB	26
Port Isolation	dB	25
VSWR		1.3:1 typ | 1.5:1 max
Return Loss	dB	18 typ | 14 max
Max. Input Power per Port	W	50
Impedance	Ohms	50

Mechanical Specifications

RF Connector Type	RP-SMA on pigtail
RF Connector Quantity	2
RF Connector Position	Antenna boom
Electrical Grounding	RF connector grounded to boom and mounting bracket
Yagi Material	6061-T6 Aluminium
Surface Finish	Ice and UV Resistant Black Powder Coating
Max. Wind Speed	322km/h | 200mph
Temperature Range	-40° to +60° C | -40° to +140° F
Ingress Protection	IP55 rain and dust resistant

Bracket Specifications

Material Type	Powder Coated 6061-T6 Aluminium
Mechanical Tilt (Degree)	-5 to +15
Mounting Type	Pipe Mount
Mounting pole diameter	19 mm – 76 mm | 0.75 in – 3 in

Antenna Dimensions

Length	965 mm | 38 in
Width	127 mm | 5 in

KP Performance Inc., P.O. Box 16759, Irvine, CA 92623
Phone: (855) 276-5772 or (780) 702-7577
info@kpperformance.com

Product Data Sheet

Height	127 mm | 5 in
Net Weight, with brackets	1.8 kg | 4 lb

Graphical Data

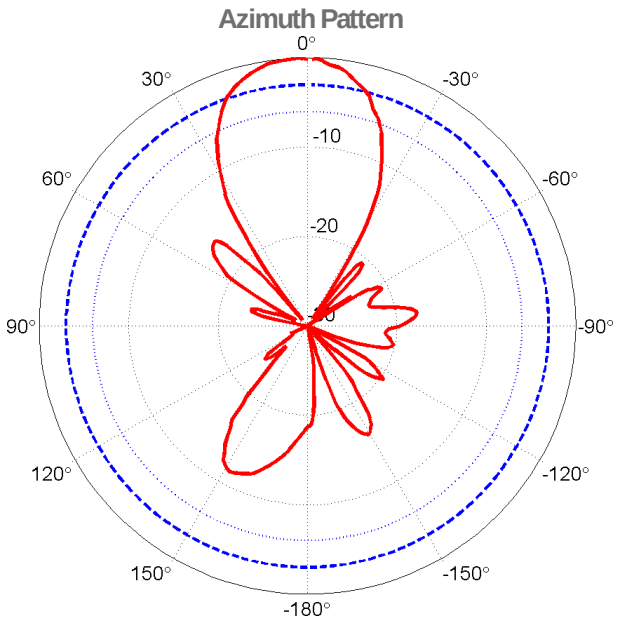

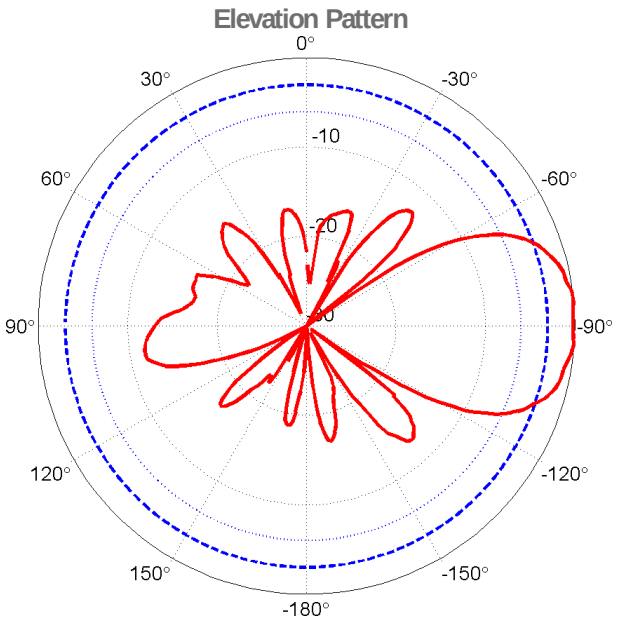

d

Appendix

HPBW: Average and variation of the antenna's 3dB beamwidth (half power beamwidth) in its horizontal (Azimuth) or vertical (Elevation) pattern.
Horizontal Squint: Angle in the antenna's azimuth pattern in which the maximum gain occurs. Reported is the maximum variation in the frequency band.
Gain: Antenna's average gain in each frequency band.
Front to Back Ratio @ 180°±30°: Difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.
Cross-polarization Ratio (dB): Maximum difference between the co-polarization and cross-polarization gain across the sector's HPBW.

KP Performance Inc., P.O. Box 16759, Irvine, CA 92623
Phone: (855) 276-5772 or (780) 702-7577
info@kpperformance.com