


## INSTALLATION INSTRUCTIONS

**Product** 7160-0826 ADJUSTABLE MIC CLIP **Revision** 

**Form** 

**Printing Spec:** PS-001

## **TOOLS NEEDED**

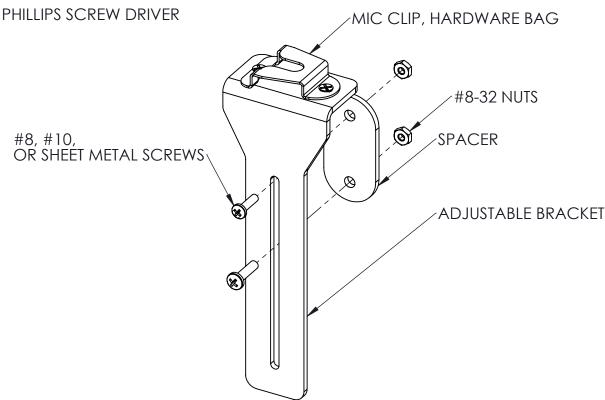

## **PARTS LIST**


PART NO.	<u>DESCRIPTION</u>	<u>QUANTITY</u>
16284 16285 10004-0001 10796-0001 7120-0723 • 9000-0053 • 1123-0607 • 1503-0800	ADJUSTABLE MIC CLIP SPACER ADJUSTABLE MIC CLIP BRACKET #10-32 x .750 PPHMS FS-014 #8-32 x .625 PPHMS FS-014 HARDWARE BAG - MIC CLIP ONLY • MIC CLIP • #8-32 x .375 PFH82MS FS-014 • #8-32 NUT NYLOK FS-014	1 1 1 1 • 1 • 2
• 100016-0002	• #10-32 x .375 PFH82MS FS-014	• 2

Product Mounting Disclaimer
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.




## INSTALLATION INSTRUCTIONS


- The assembly includes hardware to mount the Adjustable Mic Clip to Consoles.
- Attach the Adjustable Bracket to the Console in the Over or Away position. Place the Spacer between the Console and the Adjustable Bracket.
- If using on the 25" Universal Console:
  - Use the two #10-32 x .750 screws to attach the Adjustable Bracket to the PEMs on the 25" Universal Console, throw out the two nuts. If attaching at an angle, use one PEM and #10-32 x .750 screw, drill the
  - second hole and use one #8-32 x .625 screw and one #8-32 nut.
- If using on any other Console:
  - Drill two holes for the two #8-32 x .625 screws using the Spacer as a guide.
  - Slide the Adjustable Bracket to the desired height and tighten with the two #8-32 nuts included in the hardware bag.
- Attach the Mic Clip to the Adjustable Bracket using the two #8-32 x .375 screws.




**OVER, LOW** 0.100" ABOVE RAILING



**OVER, HIGH** 3.000" ABOVE RAILING





**OVER, ANGLED** 

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.