

8 7 6 5 4 3 2 1


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 4664: REDRAWN AND NEW FORMAT	4/7/10	D.FRISIELLO
D	ECN 4752: REVISED FREQUENCY RANGE TO 6 GHz	5/19/10	D.FRISIELLO
E	ECN 7335: REVISED PACKAGING TO INDIVIDUAL, ROHS, FORMAT	3/11/14	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
FERRULE	BRASS	NICKEL PLATE
CENTER PIN	BRASS	GOLD PLATE
INSULATOR	PTFE	-
CAP	BRASS	NICKEL PLATE



CAP

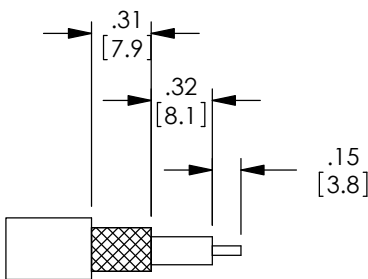


RECOMMENDED
CABLE STRIPPING

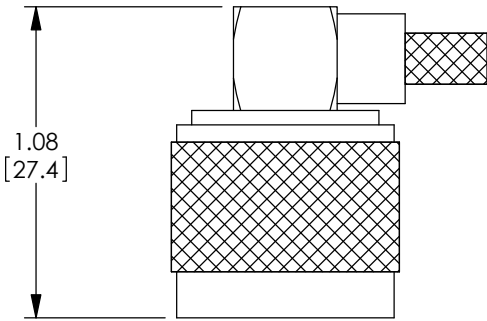

BODY



FERRULE



RECOMMENDED
FERRULE CRIMP SIZE
(PIN IS SOLDER TYPE)

NOTES:

IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC ~ 6 GHz
VOLTAGE RATING: 1500 VOLTS
DIELECTRIC WITHSTANDING VOLTAGE: 2500 V rms
CABLE RETENTION: 30 LBS

APPLICATION: LOW-LOSS 195 SERIES & RG58.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	4/6/10		
	CHECKED BY K.BURGNER	4/6/10	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	4/6/10	PRODUCT DESCRIPTION TYPE N MALE R.A. FOR 195R/RG58	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ANM-1716	REV. E
	SCALE: NONE	CAD FILE: ANM-1716.SLDDRW	SHEET 1 OF 1	