



GAR VFT69383X2NJV

3-Port Vehicular MIMO Antenna 698-960/1690-3800 MHz

The Gar VFT69383x2NJV multiport/multiband antenna provides an excellent solution for public safety, transportation, and aftermarket fleet applications. Configured for two-port operation over the 3G/4G/5G/ISM/CBRS bands and an additional port providing an active antenna for enabling GNSS global navigation services.

FEATURES AND BENEFITS

- One single-hole mount/fixing- reduces vehicle damage and the cost of installation
- Attractive IP67 low profile aerodynamic housing
- Multiband/Multiport operation LTE/GNSS navigation
- Operates well on a ground plane and without a ground plane

APPLICATIONS

- FirstNet/Public safety
- Transportation
- Aftermarket fleet
- 5G-ready
- Rugged LTE gateways
- Others

ELECTRICAL SPECIFICATIONS

Antenna Model	VFT69383x2NJV								
Number of Ports	3								
Port Configuration	2X - 3G/4G/5G/ISM/CBRS (LTE/CELL)								
Operating Frequency (MHz)	698-806	824-894	880-960	1690-1880	1850-1990	1910-2180	2300-2500	2500-2700	3300-3800
Avg. Peak Gain* (dBi) - Gnd. Plane [No Gnd. Plane]	0.7 [1.1]	0.5 [1.6]	0.2 [2.1]	3.7 [1.2]	3.0 [1.3]	2.5 [1.2]	3.7 [1.2]	4.6 [1.5]	5.5 [2.2]
Max Peak Gain* (dBi) - Gnd. Plane [No Gnd. Plane]	2.0 [2.1]	1.3 [3.2]	2.2 [3.7]	4.7 [1.1]	3.6 [1.6]	3.4 [1.6]	5.1 [1.6]	5.1 [2.4]	7.5 [3.8]
VSWR** - Avg, Gnd. Plane [No Gnd. Plane]	1.8 [1.9]	1.8 [1.8]	1.4 [1.7]	1.6 [1.7]	1.6 [1.5]	1.5 [1.5]	1.4 [1.6]	1.4 [1.5]	1.5 [1.3]
VSWR** - Max, Gnd. Plane [No Gnd. Plane]	2.5 [2.5]	2.2 [2.5]	2.2 [2.5]	2.0 [2.1]	2.0 [2.1]	2.2 [2.1]	2.1 [2.1]	2.0 [2.1]	2.0 [2.1]
Isolation** (dB)- Gnd. Plane [No Gnd. Plane]									
LTE1 to LTE2	-10 [-12]	-12 [-14]	-14 [-14]	-17 [-16]	-18 [-16]	-18 [-16]	-22 [-22]	-21 [-23]	-25 [-26]
LTE1 to GNSS	-41 [-40]	-45 [-42]	-45 [-42]	-41 [-39]	-49 [-45]	-50 [-48]	-60 [-55]	-56 [-53]	-47 [-45]
LTE2 to GNSS	-42 [-39]	-38 [-38]	-38 [-37]	-44 [-42]	-49 [-46]	-49 [-45]	-41 [-38]	-55 [-50]	-44 [-40]

ELECTRICAL SPECIFICATIONS

Azimuth Plane 3 dB Beamwidth	360°, Omnidirectional
Nominal Impedance (Ohms)	50
Polarization	Linear Vertical
Max Power - Ambient 25°C (W)	30 (LTE/CELL)

Notes: (*) - This parameter is based on a 30cm (1ft) cable length. For the ground plane measurement, a 30cm (1ft) ground plane was used
(**) - This parameter is based on a 518cm (17ft) cable length. For the ground plane measurement, a 30cm (1ft) ground plane was used. Antenna specifications are subject to change according to the ground plane size.

MECHANICAL SPECIFICATIONS

Dimensions - L x W x H - mm (inches)	179 x 63 x 48 (7.04 x 2.48 x 1.69)
Weight - kg (lbs.)	0.74 kg (1.6 lbs)
Cable Type	LMR 100- pigtailed, LMR 195- jumper cables
Mounting	P-Mount
Color	Black or White
Radome Material	PC, UL94-V0
Baseplate Material	Aluminum

ENVIRONMENTAL SPECIFICATIONS

Operating Environment	Outdoor Vehicle
Operating Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Ingress Protection Rating	IP67
Rail Compliance Standards	EN61373 (shock and vibration), EN50155 (temperature)
Material Substance Compliance	RoHS

CONFIGURATION

PART NUMBER	CABLE LENGTH		CONNECTORS		COLOR
	PIGTAIL	JUMPER	LTE/CELL	GNSS	
VFT69383B2N2N-518Q	0.3 m (1 ft.)	4.9 m (16 ft)	SMA-male	SMA-male	Black
VFT69383W2N2N-518Q	0.3 m (1 ft.)	4.9 m (16 ft)	SMA-male	SMA-male	White


GNSS ANTENNA SPECIFICATIONS

Frequency of Operation (MHz)	1559 - 1606				
Band	BEIDOU	GPS	GLONASS		
Frequency Band (MHz)	1561.098 ±2.046	1575.42 ±1.023	1602 ±5		
Absolute Gain (dBi) - Gnd. Plane [No Gnd. Plane]	3.4 [3.5]	4.9 [5.1]	5.4 [4.7]		
LNA Gain, Typ. @ room temp. (dBi)	28 ±3				
Noise Figure @ room temp., Max (dB)	≤ 2.5 @ 1575 MHz				
Max VSWR @ room temp.	≤ 2.0				
Polarization	RHCP				
Nominal Impedance (Ohms)	50				
DC Voltage (Vdc)	3.3				
Operating Supply Voltage (Vdc)	2.5 - 7.0				
Current Consumption, Max @ room temp mA)	8.5 ± 3 @ 3.0V				
Out-of-band Signal Rejection Min @ room temp (dBc)	80 @ 698-960 MHz	80 @ 1428-1511 MHz	50 @ 1627-1638 MHz	80 @ 1710-2700 MHz	70 @4900- 5800 MHz
Input Max Power (dBm)	-10				
Cable Type	RG174, Black				

PACKAGING INFORMATION

PACKAGED DIMENSIONS	CARTON	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	1	4	140	196
Height - mm (in.)	130 (5.12)	235 (9.25)	1335 (52.56)	1813 (71.38)
Length - mm (in.)	222 (8.74)	543 (21.38)	1200 (47.24)	1200 (47.24)
Width - mm (in.)	222 (8.74)	232 (9.13)	800 (31.5)	800 (31.5)
Shipping Weight - kg (lb.)	0.97(2.1)	4.41 (9.72)	167 (368)	229 (504)




MECHANICAL DRAWINGS

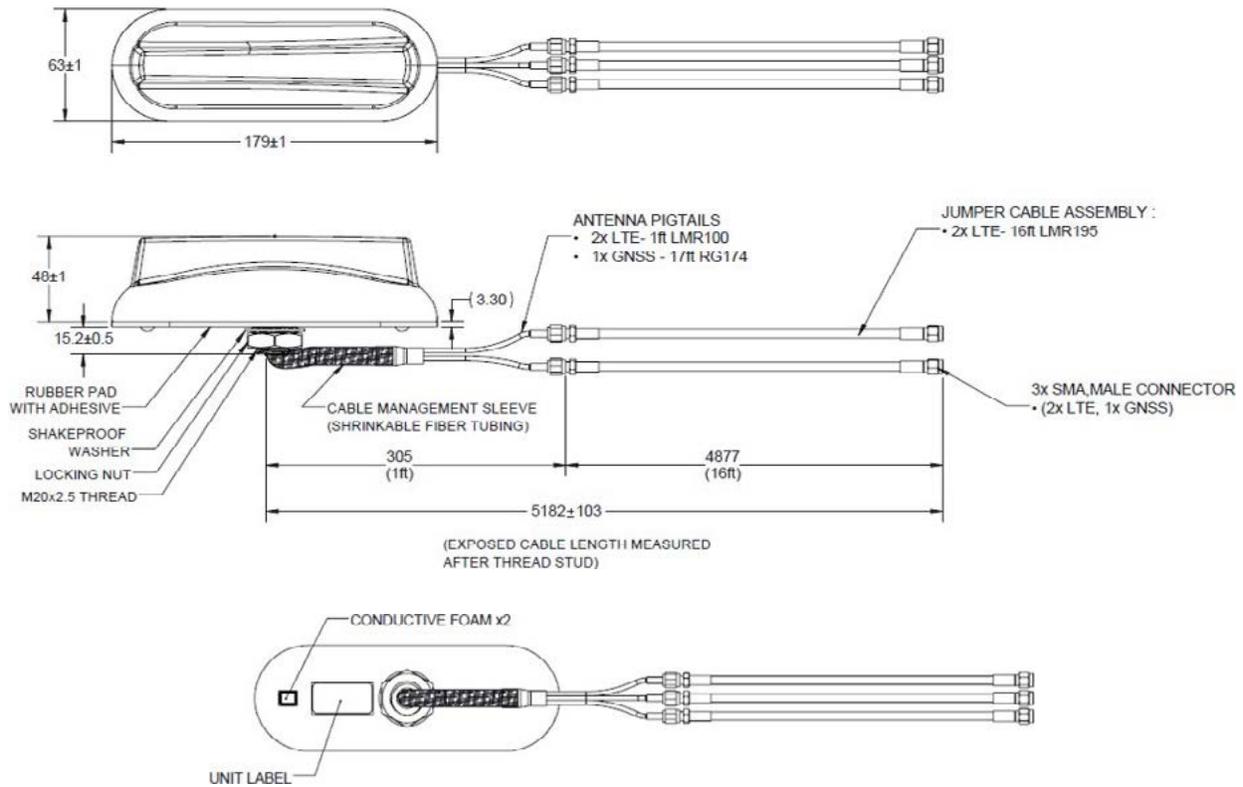




The Gar antenna can create an IP67 water-tight seal when installed on vehicles. Certain vehicles such as a Ford Explorer Interceptor have more narrow roof ridges that are tightly spaced together. For this type, vehicle special adapters are available. See parts BKIT-VFX69383-001 (between ridges installation) and BKIT-VFX69383-003 (atop ridge installation) for product details.

RADIATION PATTERNS WITH GROUND PLANE - LTE ANTENNAS




698 MHz

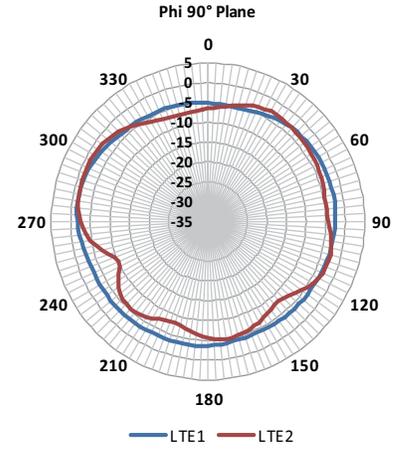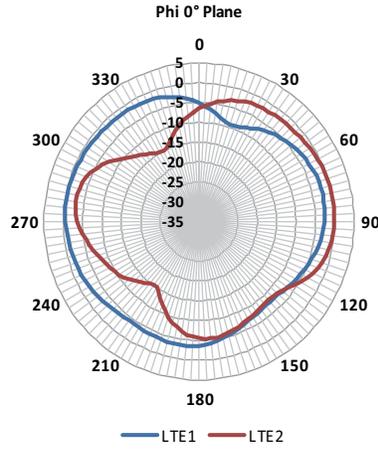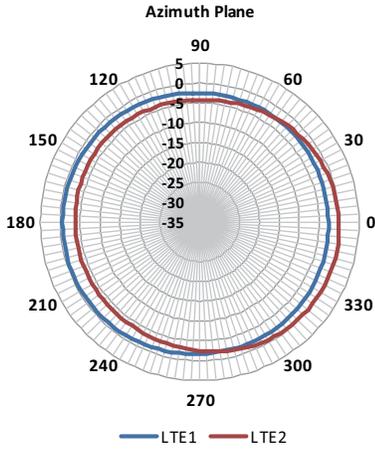

725 MHz

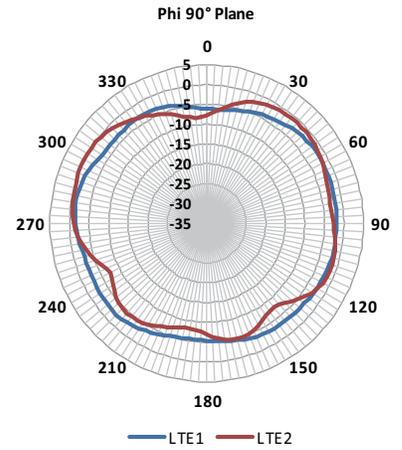
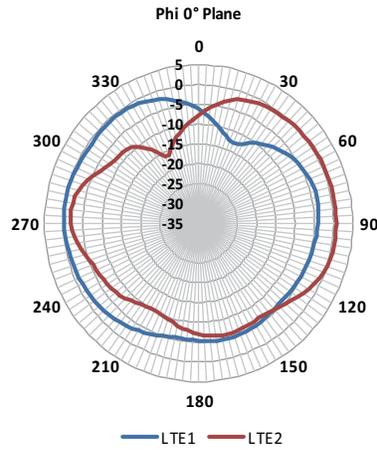
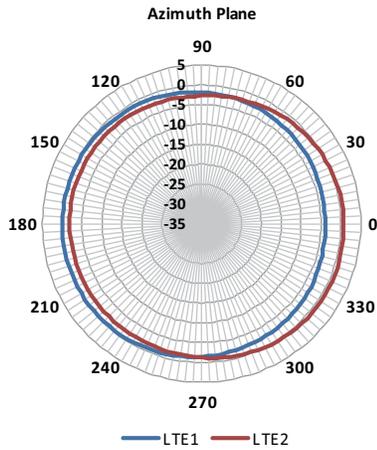


880 MHz

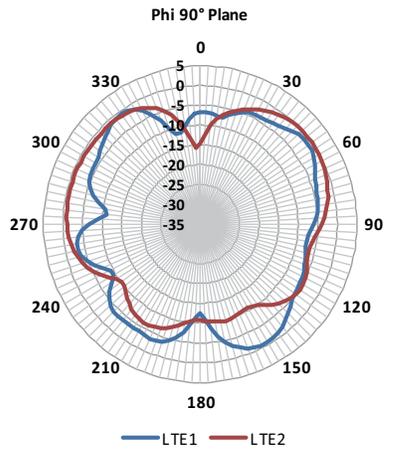
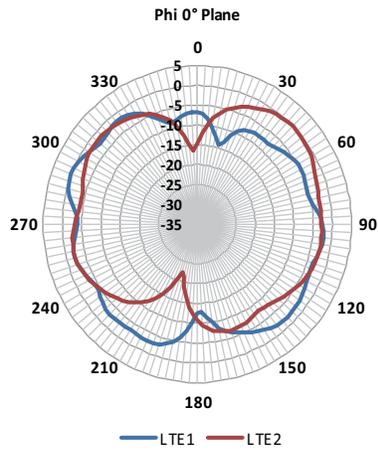
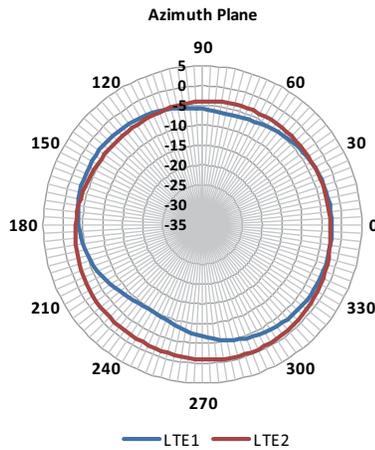


RADIATION PATTERNS WITH GROUND PLANE - LTE ANTENNAS




960 MHz

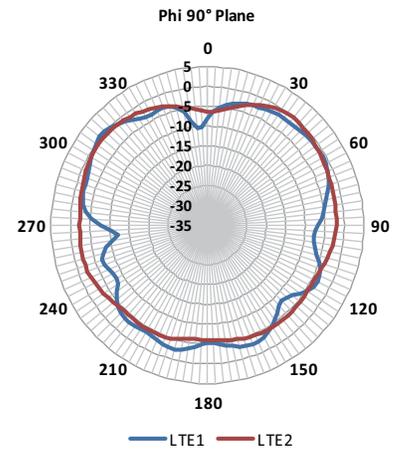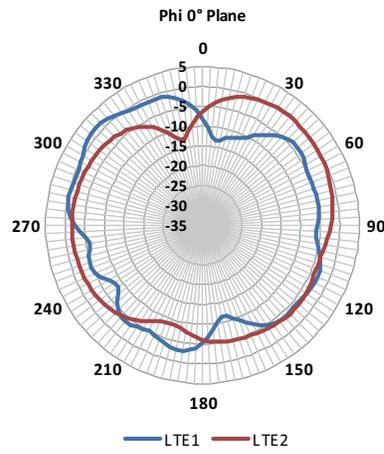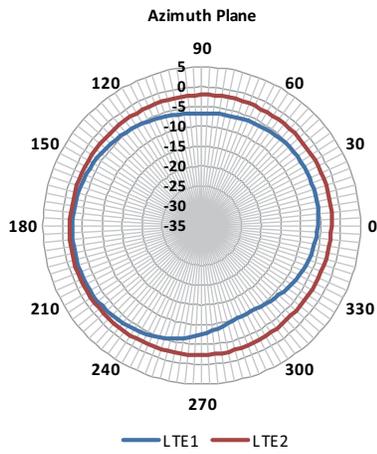

1690 MHz

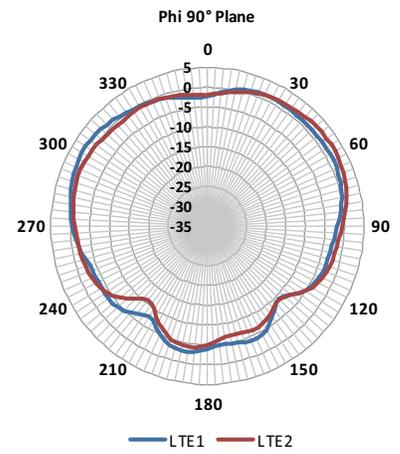
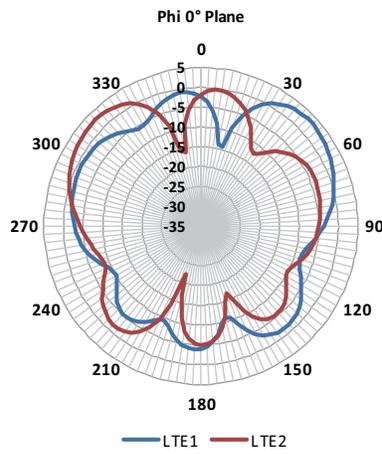
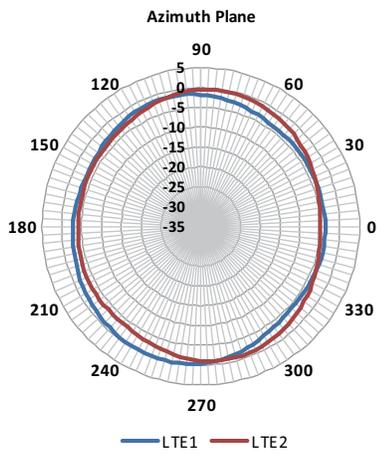


1920 MHz

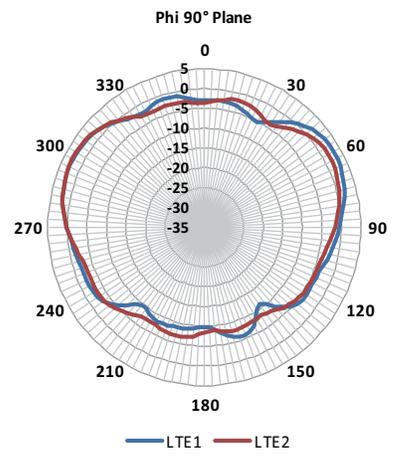
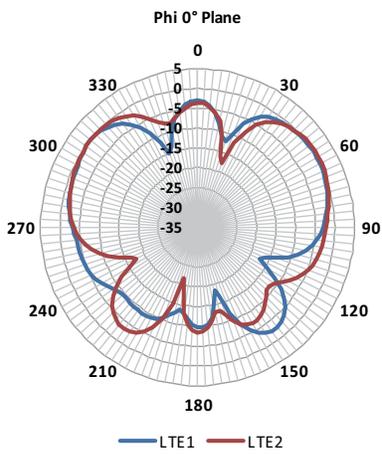
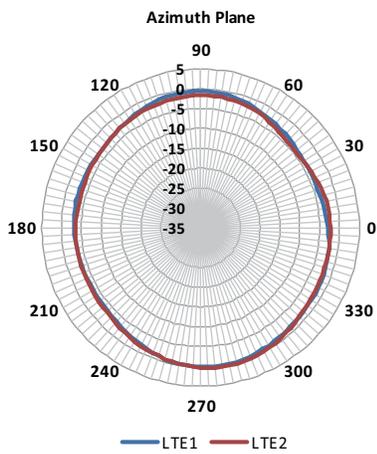


RADIATION PATTERNS WITH GROUND PLANE - LTE ANTENNAS




2110 MHz

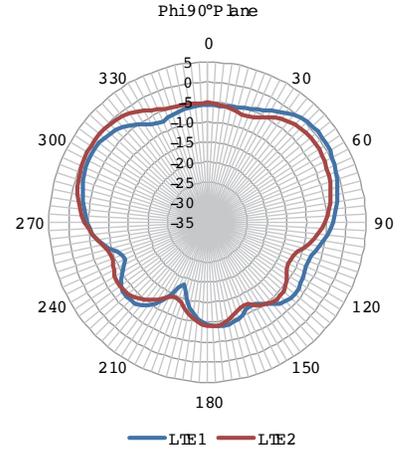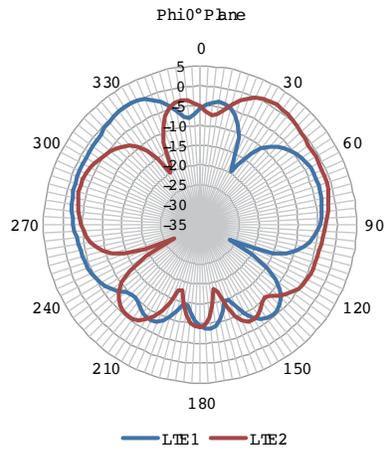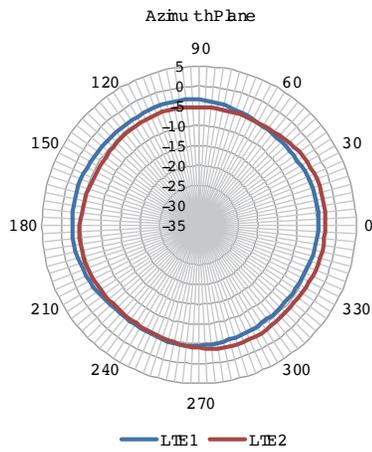

2400 MHz

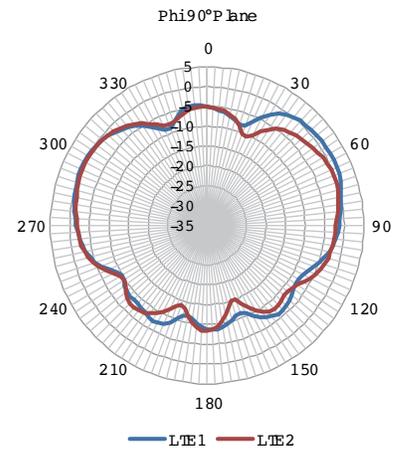
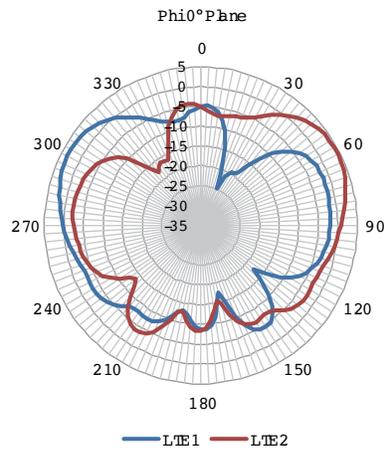
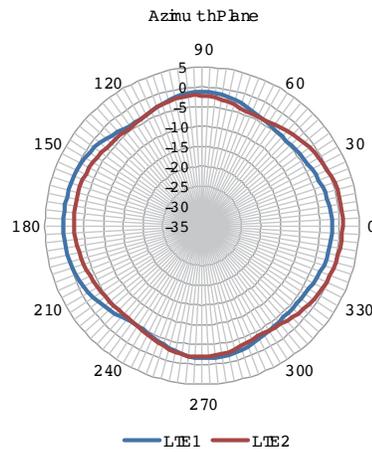


2700 MHz

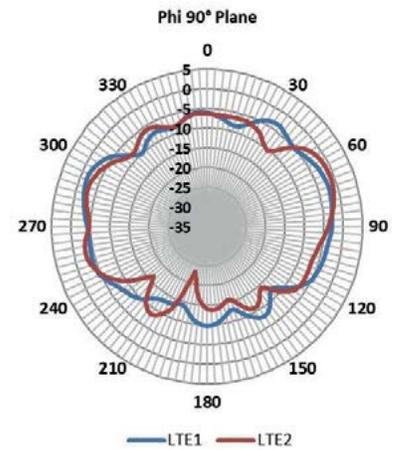
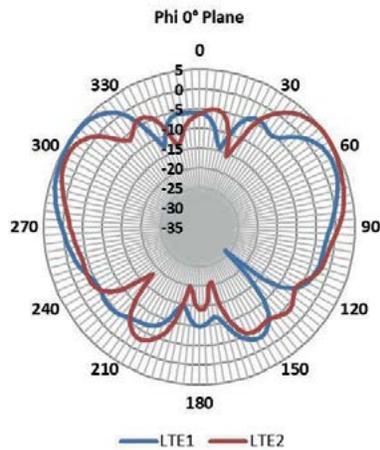
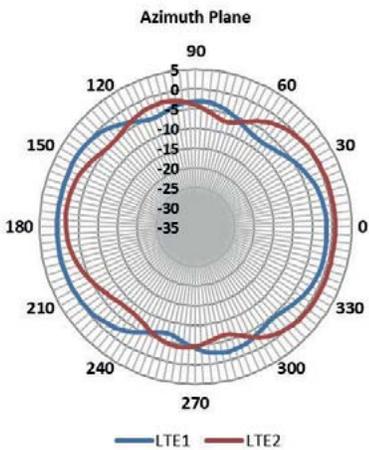


RADIATION PATTERNS WITH GROUND PLANE - LTE ANTENNAS

3400 MHz

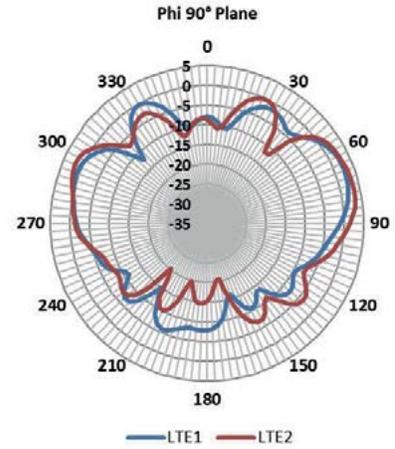
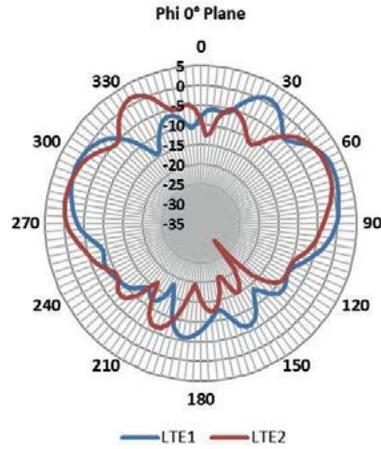
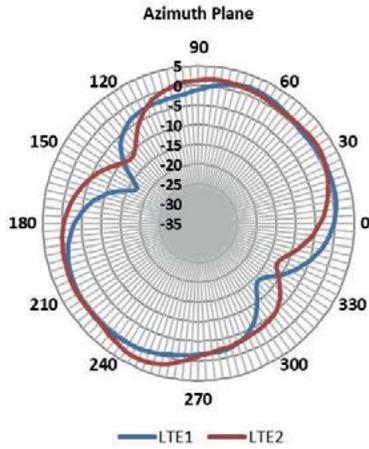


3800 MHz

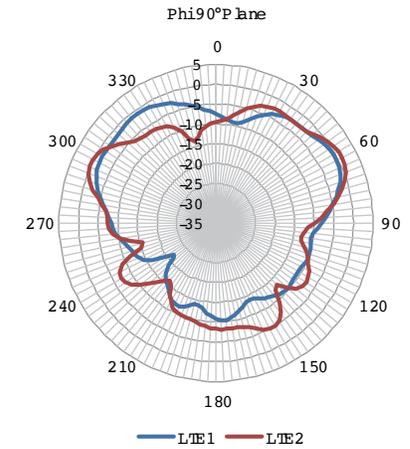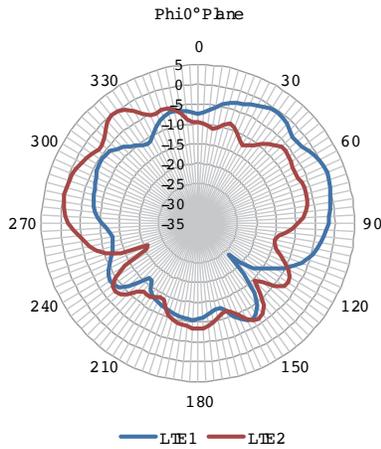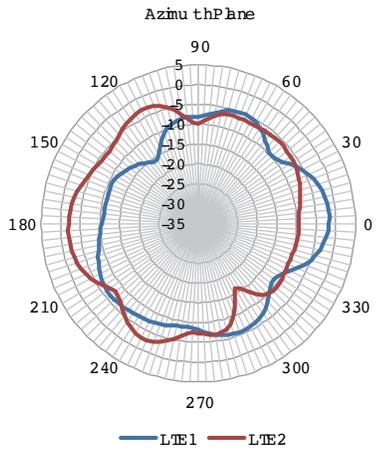




RADIATION PATTERNS WITHOUT GROUND PLANE - LTE ANTENNAS

698 MHz

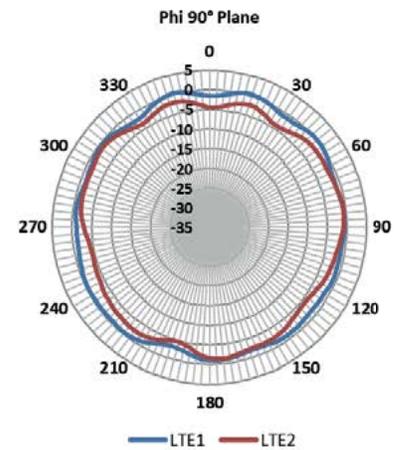
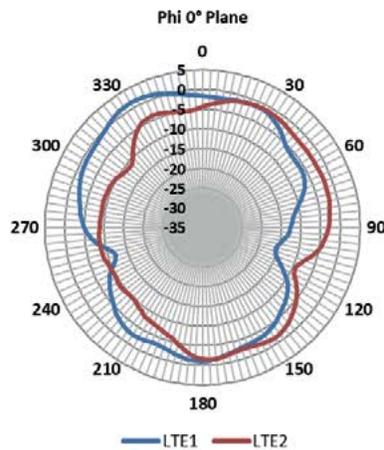
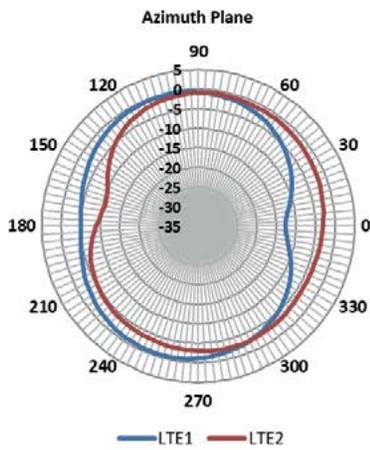


RADIATION PATTERNS WITHOUT GROUND PLANE - LTE ANTENNAS




725 MHz

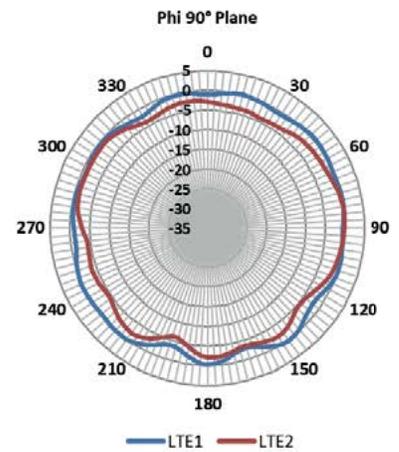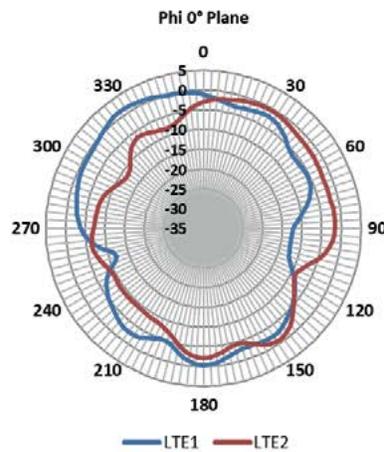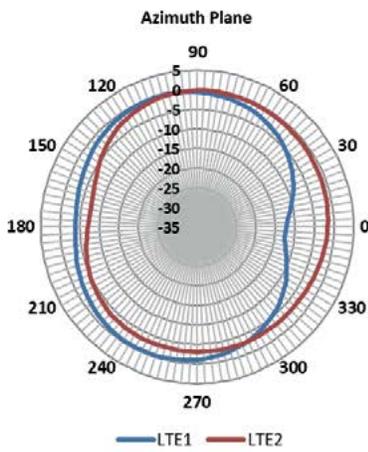

880 MHz

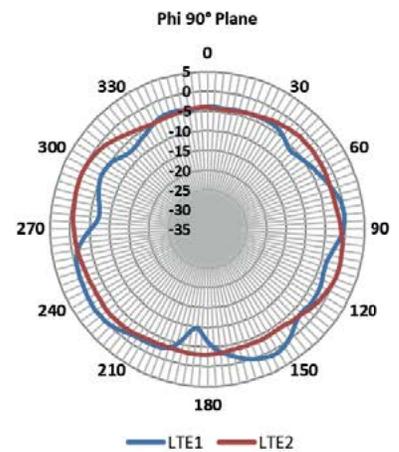
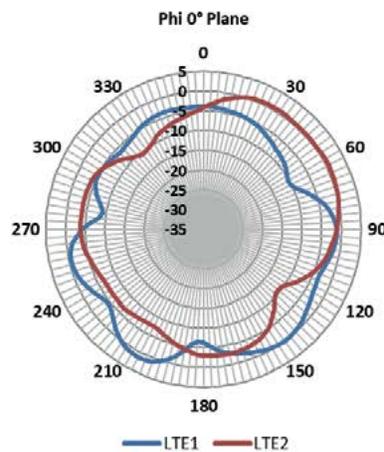
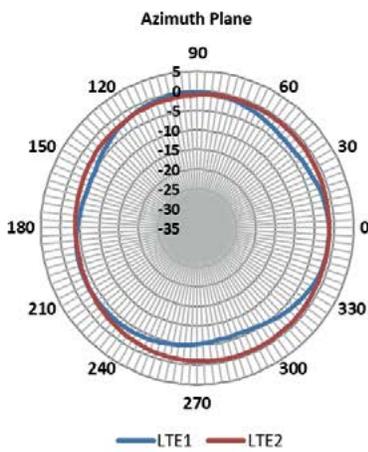


960 MHz

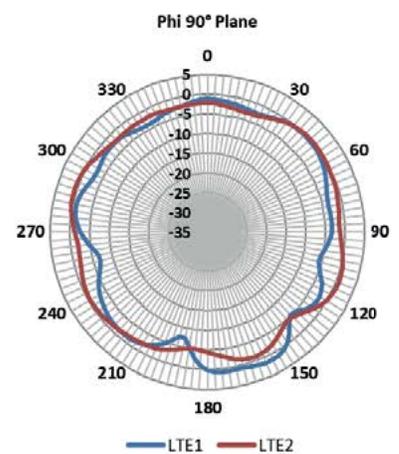
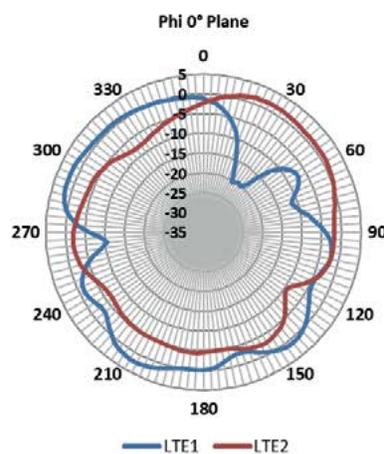
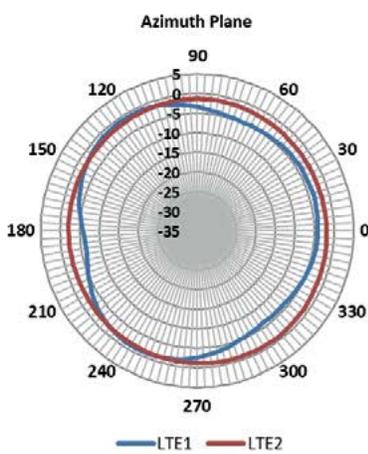


RADIATION PATTERNS WITHOUT GROUND PLANE - LTE ANTENNAS




1690 MHz

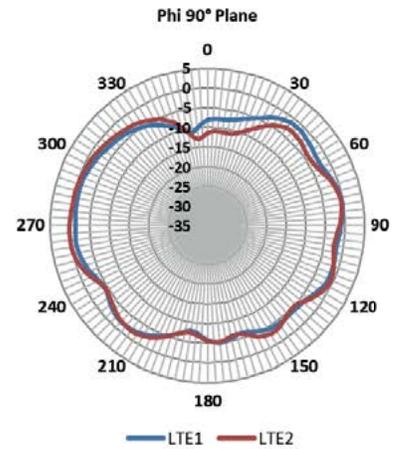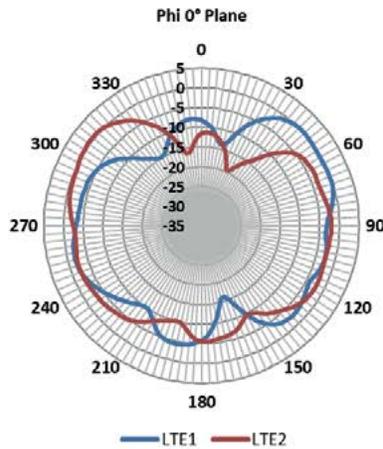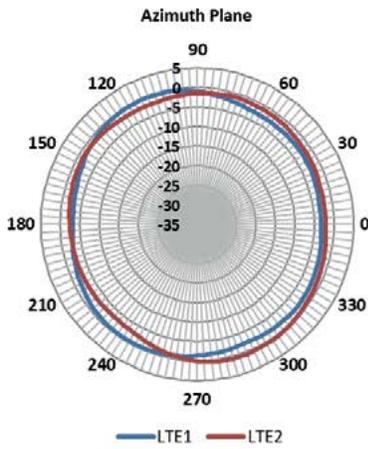

1920 MHz

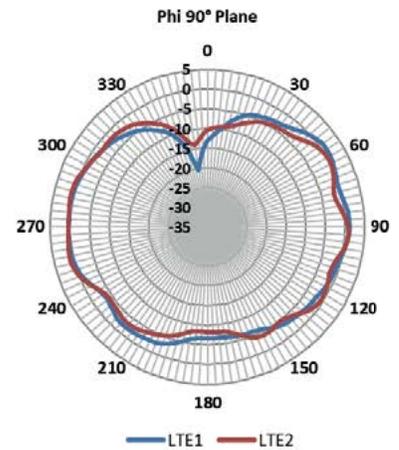
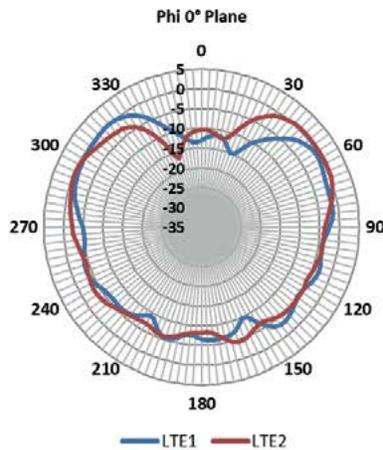
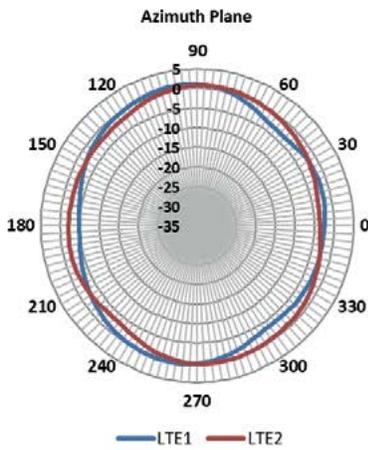


2110 MHz

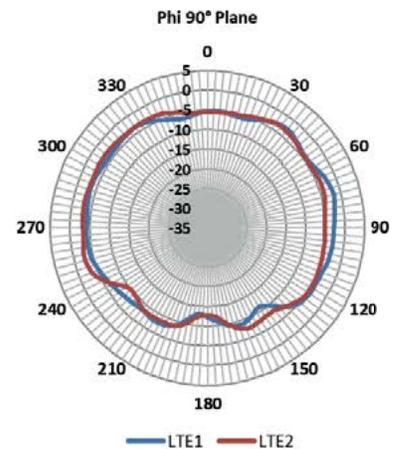
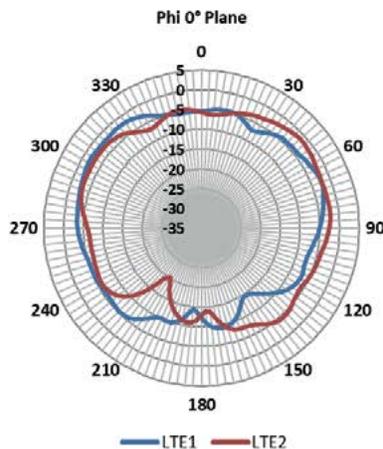
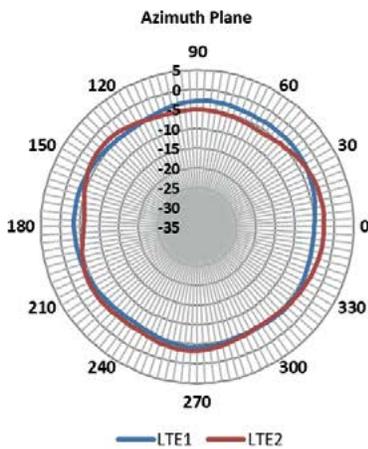


RADIATION PATTERNS WITHOUT GROUND PLANE - LTE ANTENNAS




2400 MHz

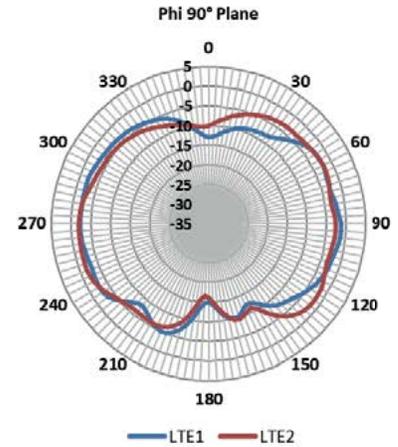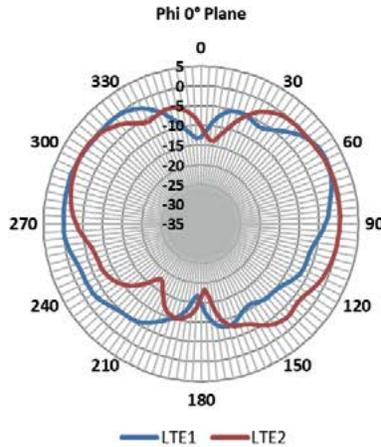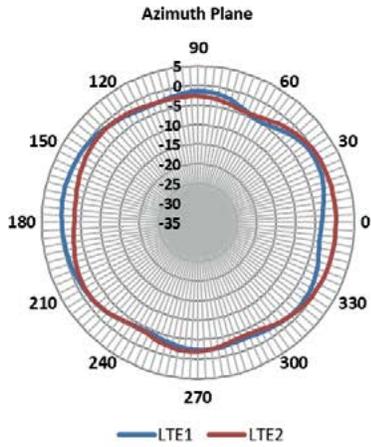


2700 MHz

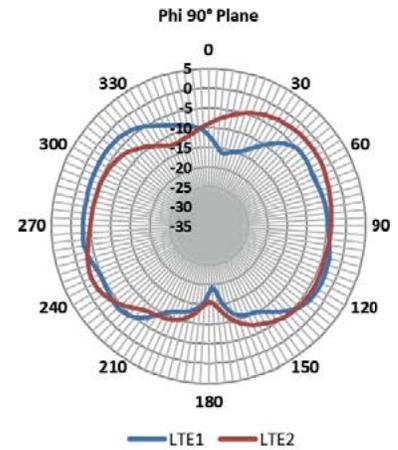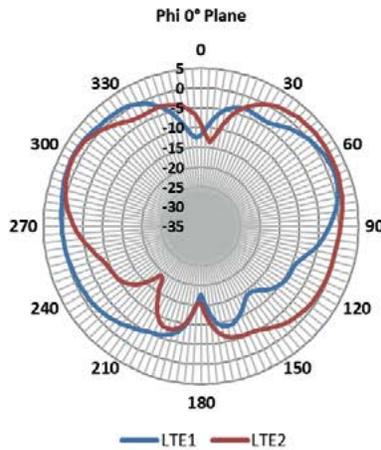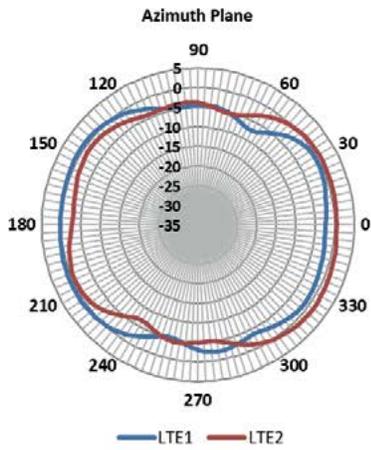

3400 MHz

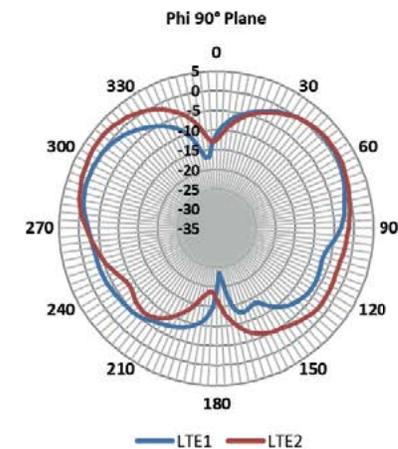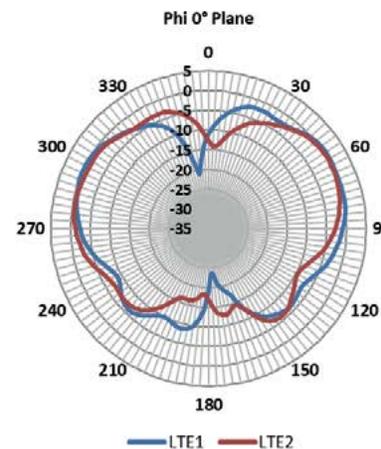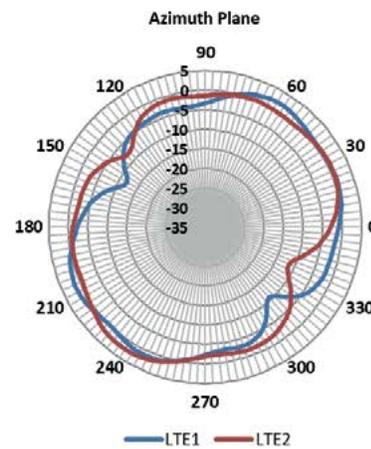

RADIATION PATTERNS WITHOUT GROUND PLANE - LTE ANTENNAS

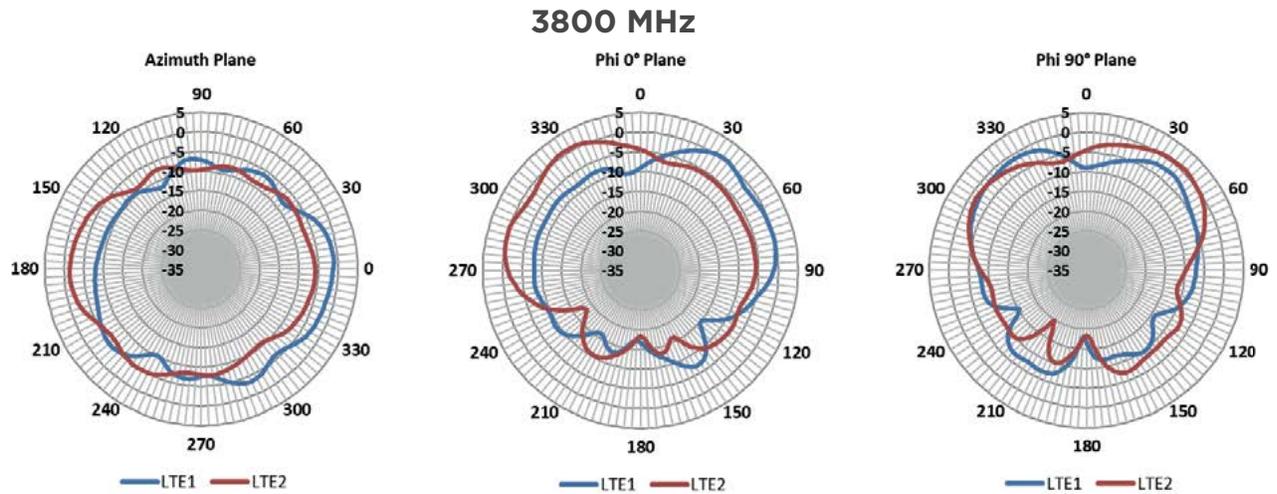

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 Original