



**U.S. PATENT 10,680,339**

## CFD69716

**Low Profile Ceiling Mount MIMO 5G DAS  
Antenna 698-7125 MHz**

The CFD 5G two-port MIMO DAS antennas series is the latest addition to TE Connectivity's extensive DAS antenna portfolio. They extend the current frequency offering up to 7125 MHz to service more of the available 5G frequency bands. Mounting options include hard and ceiling tile mounting and with or without screw holes for additional security.

These antennas are applicable for environments where aesthetics and wide-angle coverage are necessary for successful wireless deployment. Their surprisingly small size and ultra-low-profile enables maximum mounting flexibility while maintaining desired in-building aesthetics. CFD 5G series antennas support 698-960, 1350-1550, 1690-4200, and 5150-7125 MHz in an ultra-low-profile format that is discrete and unobtrusive.

### FEATURES AND BENEFITS

- Full coverage - Wide frequency coverage
- Performance - VSWR ratings of <math><1.7:1</math> up to 4200 MHz
- Low PIM - Rated to 4200 MHz with an impressive - 162 dBc
- MIMO - Two-port MIMO for multipath mitigation
- Versatile - Mounting options for ceiling tile or hard ceilings
- Quality - Designed and built to exacting specifications
- Peace of mind - Backed by our five-year warranty

### APPLICATIONS

- Arenas/airports/campuses
- Office buildings
- Hospitals
- Large residential buildings
- Hotels and casinos
- Public safety

## ELECTRICAL SPECIFICATION

Model Name	CFD69716P / CFD69716P1											
Number of Ports	2											
Operating Frequency (MHz)	698-824	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2180	2300-2700	3300-3800	3800-4200	5150-5925	5925-7125
Peak Gain - Average (dBi)	2.8	2.4	2.3	4.0	3.1	3.0	4.5	4.6	5.1	4.9	4.7	4.6
Peak Gain (dBi)	3.3	2.8	2.7	4.3	3.4	3.8	5.7	5.4	5.5	5.3	5.6	5.4
VSWR - Avg	1.5		1.2	1.5			1.6	1.4		1.7		
VSWR - Max	1.7:1										2.3:1	
PIM - 2x20W (dBc) (Max)	-150			-150								
PIM - 2x20W (dBc) (Average)	-160			-162								
Isolation, Max (dB)	15		14	15			25					
Isolation, Avg (dB)	21		16	20			34		38			
Ports	2											
Nominal Impedance ( $\Omega$ )	50											
Polarization	Linear - Horizontal											
Azimuth Beam Width ( $^{\circ}$ )	360, Omnidirectional											
Max Power - Ambient 25°C (W)	50 (698-4200 MHz) / 10 (5150-7125 MHz)											

## MECHANICAL SPECIFICATIONS

Dimensions - H x D - mm (in.)	7.6 x 250 (0.30 x 9.84)
Weight - g (oz.)	420 (14.82)
Antenna Color	White
Radome Material	PC, UL94-V0

## ENVIRONMENTAL SPECIFICATIONS

Operating Environment (Indoor or Outdoor)	Indoor
Operating Temperature - $^{\circ}$ C ( $^{\circ}$ F)	-30 to +70 $^{\circ}$ C (-22 to +158 $^{\circ}$ F)
Storage Temperature - $^{\circ}$ C ( $^{\circ}$ F)	-40 to +85 $^{\circ}$ C (-40 to +185 $^{\circ}$ F)
Material Substance Compliance	RoHS

## CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR	MOUNTING	PACKAGING
CFD69716P-30D43F	30 cm (12")	4.3-10 FEMALE	CEILING TILE	UNIT
CFD69716P-30NF	30 cm (12")	N TYPE - FEMALE	CEILING TILE	UNIT
CFD69716P-B30D43F	30 cm (12")	4.3-10 FEMALE	CEILING TILE	BULK
CFD69716P-B30NF	30 cm (12")	N TYPE - FEMALE	CEILING TILE	BULK
CFD69716P1-30D43F	30 cm (12")	4.3-10 FEMALE	HARD CEILING	UNIT
CFD69716P1-30NF	30 cm (12")	N TYPE - FEMALE	HARD CEILING	UNIT
CFD69716P1-B30D43F	30 cm (12")	4.3-10 FEMALE	HARD CEILING	BULK
CFD69716P1-B30NF	30 cm (12")	N TYPE - FEMALE	HARD CEILING	BULK

## MECHANICAL DRAWING

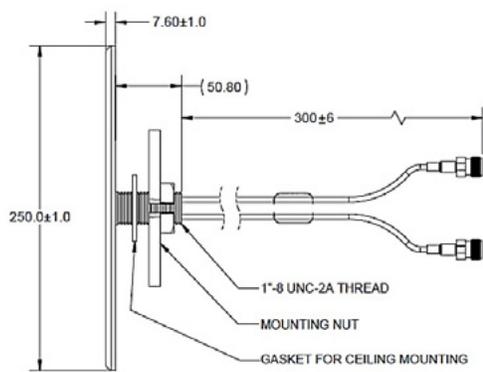


FIGURE 1: CFD69716P



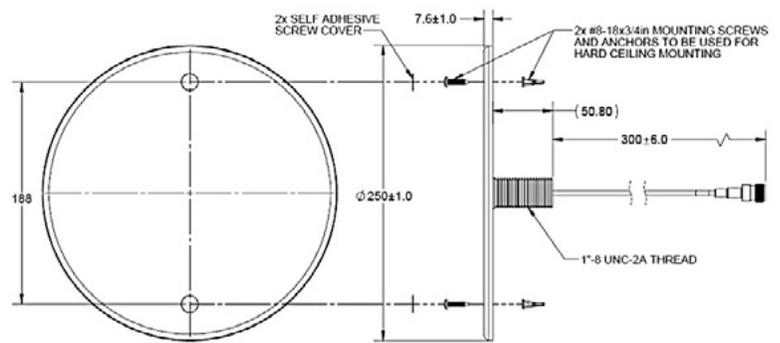


FIGURE 2: CFD69716P1

## RADIATION PATTERNS

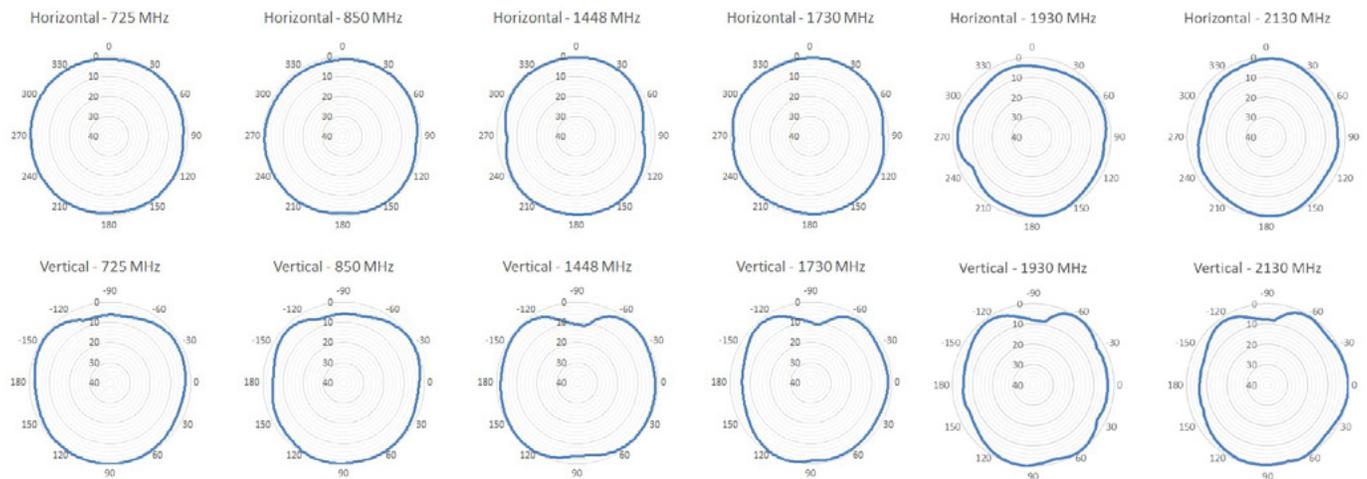


## RADIATION PATTERNS

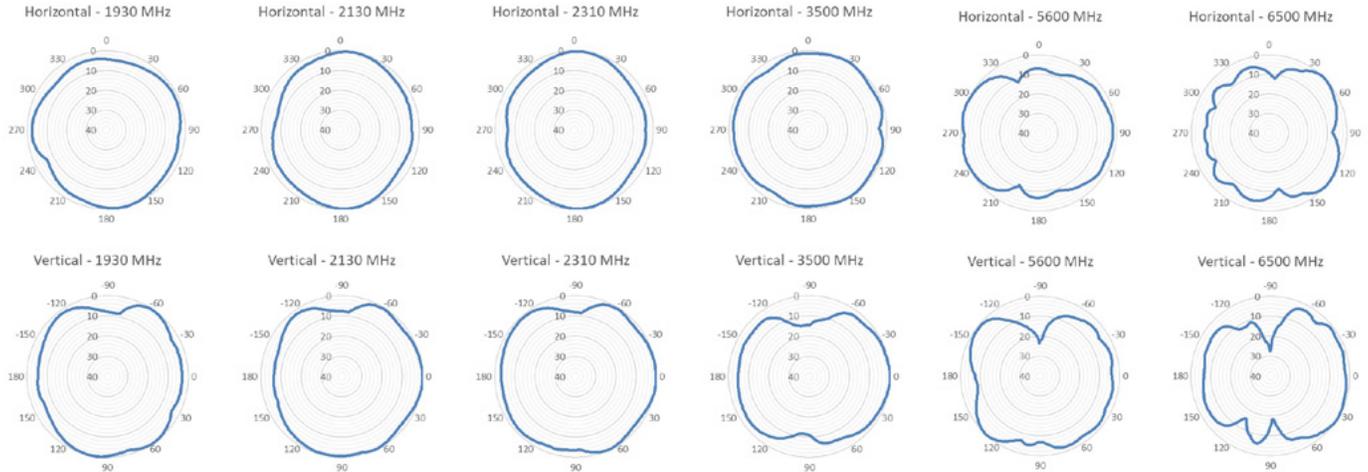


**Note:** 1. Horizontal plane cut is based on Theta=45° Plane from the measurement coordinate system  
 2. The radiation pattern presented is normalized combining diversity coverage for two ports gain.

## PACKAGING - INDIVIDUAL CARTON

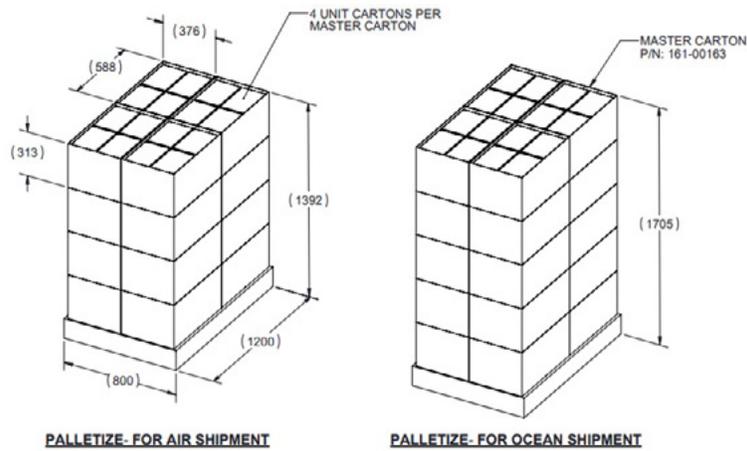


## PACKAGING - BULK PACK

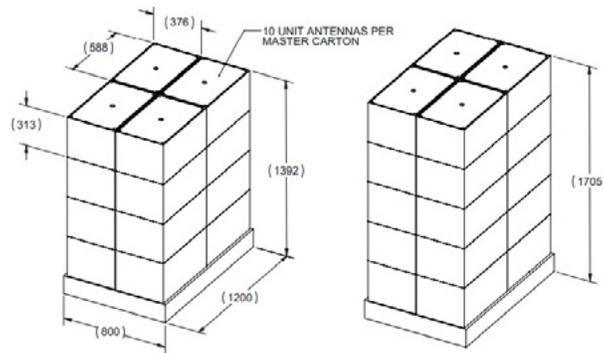


**PALLETIZE- FOR AIR SHIPMENT**


**PALLETIZE- FOR OCEAN SHIPMENT**

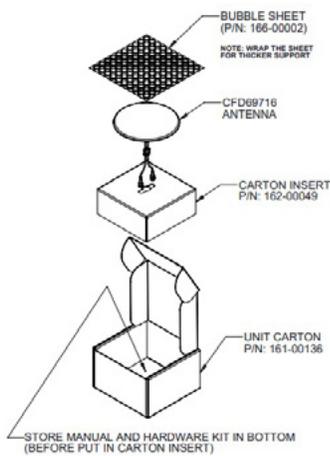

**FOR REFERENCE: UNIT CARTON LAYOUT**

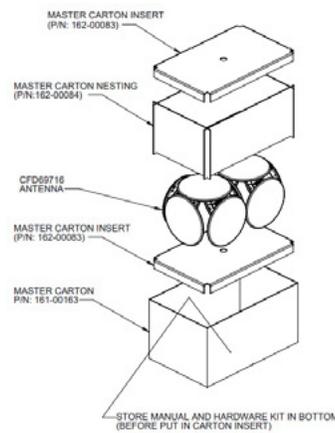

**FOR REFERENCE: MASTER CARTON LAYOUT FOR BULK PACKAGING**

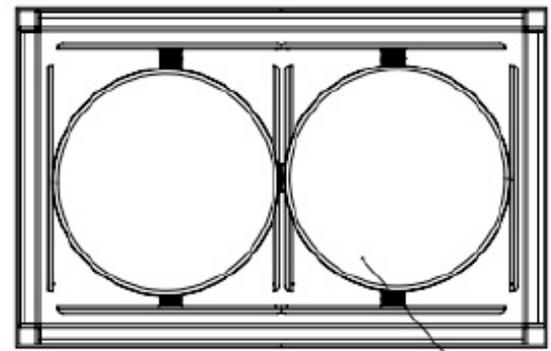

**10 UNIT ANTENNAS PER**

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original