


Dual-Axis Co-Locating Mount for Cisco 3800 Access Points and Wi-Fi Antennas

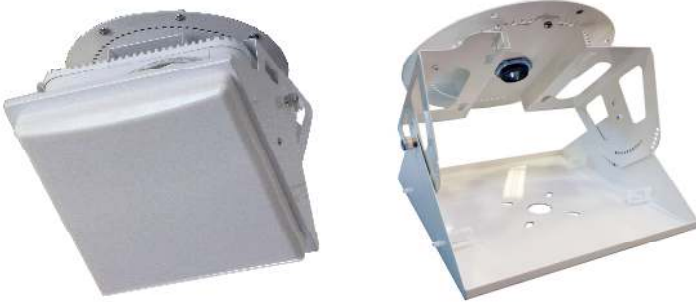

Ventev's Dual-Axis Co-Locating Mount for Cisco 3800 access point (AP) and antennas simplifies deployments, improves network performance, and presents an aesthetically pleasing appearance.

Every Ventev mount is RoHS compliant and is covered by Ventev's two-year TerraNet warranty program.

For more information or to purchase, contact Ventev: 800.851.4965 or sales@ventev.com.

SPECIFICATIONS

SKU: 243706

Product Number: TW-COLOMOUNT-2

Dimensions: 10.2" X 10.86" X 6.11"

Weight: 3.75 lbs

Materials: Powder-Coated Aluminum

Operating Temperature Range: -40° F to +131° F

Compatible Ventev Antennas

349502, 515085, 515086 , 510701, 215098, 279467, 269258, 349502, 515085, 515086 , 510701, 215098

Compatible Cisco Antennas

AIR-ANT-2566P4W-R- Adapter Plate (SKU 518506 or 574960) is required to mount the Cisco Antenna to the Co-Locating Mount.

AIR-ANT-2566D4M-R- Adapter Plate (SKU 553852) is required to mount the Cisco Antenna to the Co-Locating Mount

AIR-ANT2544V4M

Ventev's Dual-Axis Co-Locating Mount is a Patented Design

FEATURES AND BENEFITS

- Installs AP and antenna together, making it an ideal choice for difficult locations such as high ceilings
- Eliminates long cable runs between AP and external antenna for reduced signal attenuation
- Unique dual-axis positioning capability allows 360 degree horizontal rotation and +/-55 degree vertical articulation for precise positioning
- Conceals the AP and cables
- Compatible with Cisco's 2802e/3802e APs
- Ideal for auditoriums, convention centers, aisles in industrial venues