

Outdoor Non-Armored, All-Dielectric, Arid-Core, Dry Central Tube Ribbon Cable

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable


General Specifications

Cable Type	Ribbon central tube
Construction Type	Non-armored
Fiber Type, quantity	144
Fibers per Ribbon, quantity	12
Jacket Color	Black
Subunit Type	Gel-free
Total Fiber Count	144

Dimensions

Buffer Tube/Subunit Diameter	7.9 mm   0.311 in
Diameter Over Jacket	13.9 mm   0.547 in

Representative Image

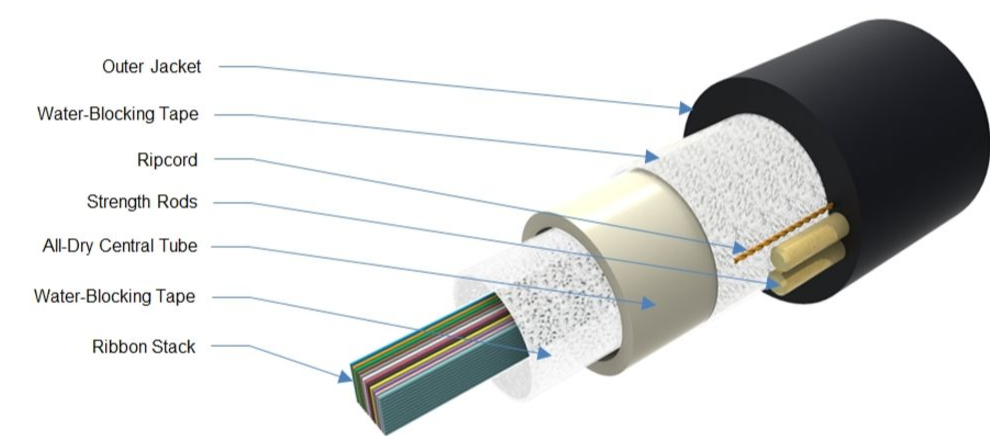

Mechanical Specifications

Minimum Bend Radius, loaded	276.9 mm   10.902 in
Minimum Bend Radius, unloaded	139.7 mm   5.5 in
Tensile Load, long term, maximum	800 N   179.847 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	22 N/mm   125.623 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.4 N-m   38.943 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads

# 760213504 | D-144-CN-RB-F12NS/8W/99A

---

<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7

## Optical Specifications

<b>Fiber Type</b>	G.652.D and G.657.A1   G.652.D and G.657.A1
-------------------	---

## Environmental Specifications

<b>Installation temperature</b>	-30 °C to +60 °C (-22 °F to +140 °F)
<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Cable Qualification Standards</b>	ANSI/CEA S-87-640   Telcordia GR-20
<b>Environmental Space</b>	Aerial, lashed   Buried
<b>Jacket UV Resistance</b>	UV stabilized
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

<b>Heat Age</b>	-40 °C to +85 °C (-40 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-30 °C to +60 °C (-22 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	149 kg/km   100.123 lb/kft
---------------------	----------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant



## Included Products

CS-8W-RB-OUTDOOR — TeraSPEED® Singlemode Fiber Flat Ribbon

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable