



# WPS-2F

## Weather Protection System: 2.2-5 Female Antenna Port/ Device Seal

For use with UXP-2MT-14S connectors only



[Installation instructions](#)



[WPS cross-reference chart](#)



Contact technical support:


1-888-201-6073

[techsupport@jmawireless.com](mailto:techsupport@jmawireless.com)

General	Specification	Comment
Ports supported	See figure below.	
Dimensions in. (mm)	0.68 x 0.21 (17.3 x 5.3)	
Weight	0.1 oz   2.8 g	
Material	Silicone rubber	
Reusability	Unlimited	

Environmental	Specification	Comment
Installation temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Operating temperature	-40 °C to +65 °C (-40 °F to 149 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Moisture resistance	No leakage	ANSI/SCTE 60 2004, IP-67, IP-68
Corrosion resistance	1000 hours	ASTM B117
U.V. resistance	Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps	
H.A.L.T.	40 hours	
Fire rating	UL94 HB	

### WPS-2F COMPATIBLE PORT SPECIFICATION

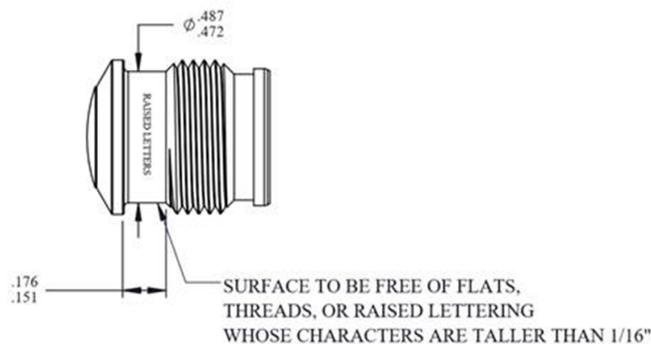

09/23/20