
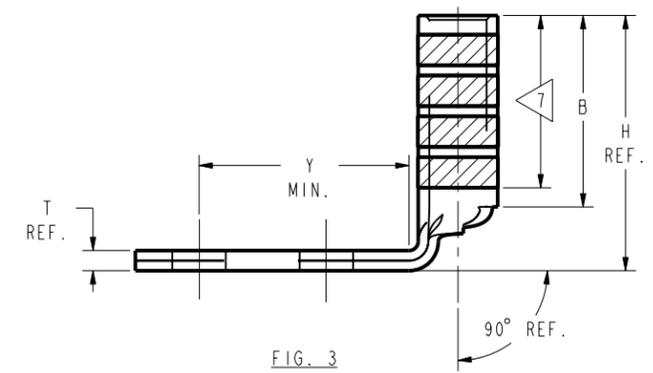
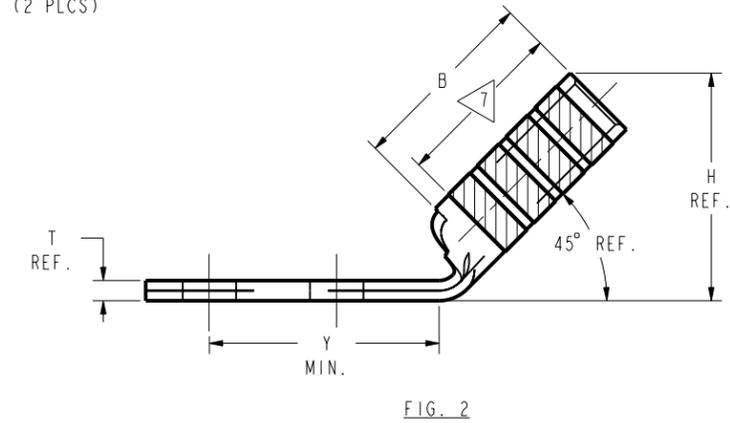
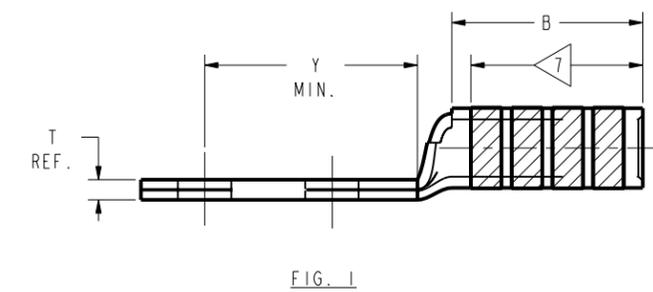
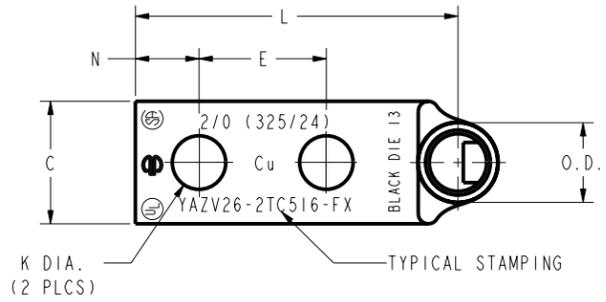
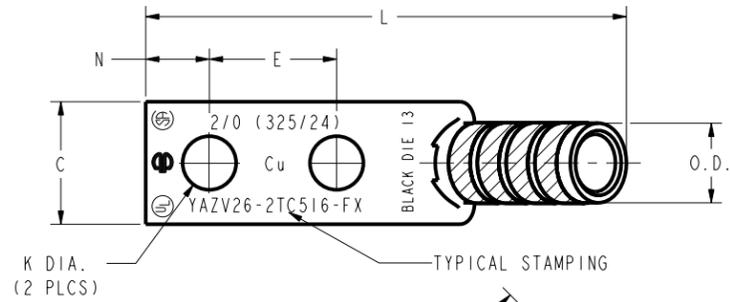


REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	1/11/2001 12:00:00 AM	REDRAW AND CATALOG NUMBER UPDATON OF SALES DRAWINGS	17057	BSB	BSK

CATALOG NO.	CONDUCTOR		BOLT SIZE	FIG. NO.	DIMENSIONS										INSTALLATION TOOLING (# CRIMPS)											
	FLEX	CODE (AWG)			B ±.08	C +.04 -.02	E ±.02	H REF.	K DIA. ±.02	L ±.12	N ±.03	O.D. ±.01	T REF.	Y MIN.	DIE INDEX	COLOR CODE	MECHANICAL		HYDRAULIC		DIELESS (# CRIMPS)	WIRE STRIP LENGTH				
																	MD7-34R	OUR840	BCT500 Y500CT	Y750 Y35, BAT35 Y39, BAT750			Y46 \triangleleft 4	Y45 \triangleleft 3		
YAZV262TC516FX	2/0 WELD 325/24	2/0 AWG [70mm ² STR.]	5/16 [M8]	1	1.50 [38]	.93 [24]	1.00 [25]	---	.33 [8]	3.64 [92]	.34 [9]	.63 [16]	.13 [3]	1.37 [35]	13	BLACK	\triangleleft 7	\triangleleft 7	\triangleleft 7	\triangleleft 7	\triangleleft 7	\triangleleft 7	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644, Y644M Y644MBH, (1)	1-9/16		
YAZV262TC516FX45								2									2.12 [54]	2.10 [53]	W26VT X26RT W26RT (4)	X26RT W26VT (4)	W26VT X26RT W26RT (4)	U26RT (2)			U26RT (2)	U26RT (2)
YAZV262TC516FX90								3									3.76 [96]	3.76 [96]	W26VT X26RT W26RT (4)	X26RT W26VT (4)	W26VT X26RT W26RT (4)	U26RT (2)			U26RT (2)	U26RT (2)
YAZV262TC38FX	2/0 WELD 325/24	2/0 AWG [70mm ² STR.]	3/8 [M10]	1	1.50 [38]	.93 [24]	1.00 [25]	---	.41 [10]	3.76 [96]	.40 [10]	.63 [16]	.13 [3]	1.43 [36]	13	BLACK	\triangleleft 7	\triangleleft 7	\triangleleft 7	\triangleleft 7	\triangleleft 7	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644, Y644M Y644MBH, (1)	1-9/16			
YAZV262TC38FX45								2									2.12 [54]	2.10 [53]	W26VT X26RT W26RT (4)	X26RT W26VT (4)	W26VT X26RT W26RT (4)			U26RT (2)	U26RT (2)	U26RT (2)
YAZV262TC38FX90								3									3.76 [96]	3.76 [96]	W26VT X26RT W26RT (4)	X26RT W26VT (4)	W26VT X26RT W26RT (4)			U26RT (2)	U26RT (2)	U26RT (2)

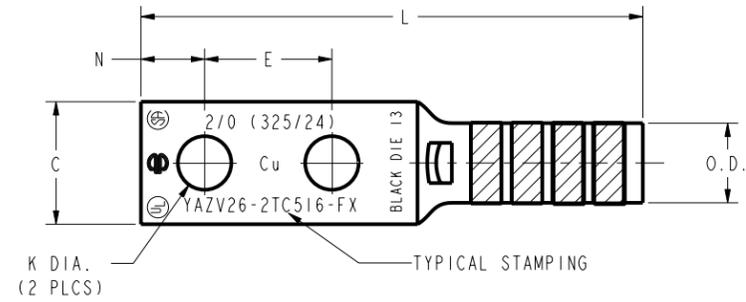

NOTES:

- MATERIAL: COPPER TUBING.
- FINISH: TIN PLATED.
- \triangleleft CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
- \triangleleft CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
- \triangleleft PERMANENT DIE IN TOOLING.
- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
- \triangleleft CRIMP (# OF CRIMPS PER TABLE) WITHIN THE LENGTH BETWEEN THE INK STAMPED CRIMPING AREA.

TO ORDER BURNDY® PRODUCTS CALL		HYLUG™ (TWO HOLE FLEX)	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: N/A	CAT. NO: YAZV26- (TABLE)
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: B MICHAUD 8/25/99	CHECKER: K HENRY 8/26/99
FOR PRODUCT INFO: http://www.burndy.com		DSN APPVL: RR TEAM 9/28/99	MFG APPVL: --
		QA APPVL: J BRODEUR 10/6/99	MKT APPVL: R ROBICHEAU 10/5/99
		PROJ #: --	SCALE: NTS
		DOCUMENT TYPE: Sales	DRAWING NO: SE212273
		REL LEVEL: Released	REV: B
		SIZE: D	SHEET 25 OF 48

REV: PE0200