


SBJAH4-1D65B-DL

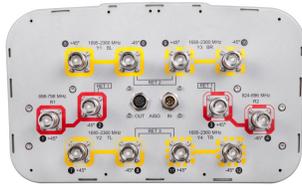

12-port sector antenna, 2x 698–798, 2x 824–896 and 8x 1695–2360 MHz, 65° HPBW, 3x RET and low bands have diplexers

- Interleaved dipole technology providing for attractive, low wind load mechanical package
- Provides support for future Band 14 operations

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light gray
Effective Projective Area (EPA), frontal	0.28 m ² 3.014 ft ²
Effective Projective Area (EPA), lateral	0.24 m ² 2.583 ft ²
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information, General

RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male

Dimensions


Width	350 mm 13.78 in
Length	1828 mm 71.969 in

SBJAH4-1D65B-DL

Depth

208 mm | 8.189 in

Array Layout

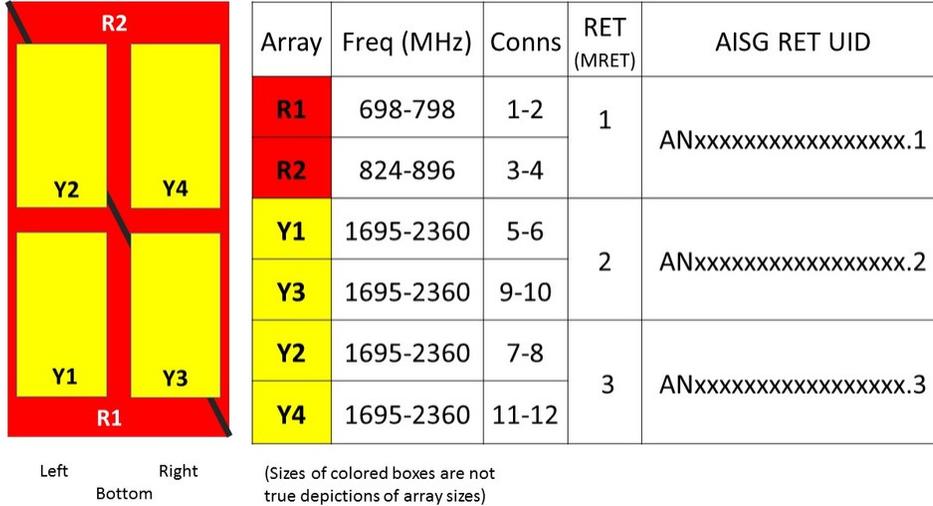

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz 698 – 798 MHz 824 – 896 MHz
Polarization	±45°

Remote Electrical Tilt (RET) Information, Electrical

Protocol	3GPP/AISG 2.0 (Multi-RET)
Power Consumption, idle state, maximum	2 W
Power Consumption, normal conditions, maximum	13 W
Input Voltage	10–30 Vdc
Internal RET	High band (2) Low band (1)

Electrical Specifications

Frequency Band, MHz	698–798	824–896	1695–1880	1850–1990	1920–2180	2300–2360
Gain, dBi	15.2	15.5	15.4	16.1	16.2	16.7
Beamwidth, Horizontal, degrees	68	65	63	63	65	65
Beamwidth, Vertical, degrees	11.7	10.3	11.3	10.4	9.8	8.9
Beam Tilt, degrees	2–14	2–14	2–14	2–14	2–14	2–14

SBJAH4-1D65B-DL

USLS (First Lobe), dB	15	16	17	18	18	17
Front-to-Back Ratio at 180°, dB	29	31	30	33	32	34
Isolation, Cross Polarization, dB	28	28	28	28	28	28
Isolation, Inter-band, dB	30	30	30	30	30	30
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153
Input Power per Port, maximum, watts	350	350	350	350	350	300

Electrical Specifications, BASTA

Frequency Band, MHz	698–798	824–896	1695–1880	1850–1990	1920–2180	2300–2360
Gain by all Beam Tilts, average, dBi	14.9	15.3	15.3	15.8	15.9	16.4
Gain by all Beam Tilts Tolerance, dB	±0.4	±0.3	±0.5	±0.4	±0.4	±0.4
Gain by Beam Tilt, average, dBi	2° 14.9 8° 15.0 14° 14.7	2° 15.2 8° 15.4 14° 15.2	2° 15.3 8° 15.4 14° 15.2	2° 15.8 8° 15.8 14° 15.7	2° 15.8 8° 15.9 14° 15.7	2° 16.4 8° 16.4 14° 16.3
Beamwidth, Horizontal Tolerance, degrees	±1.7	±1.9	±3.4	±3	±4.0	±3.3
Beamwidth, Vertical Tolerance, degrees	±0.8	±0.6	±0.7	±0.7	±0.6	±0.3
USLS, beampeak to 20° above beampeak, dB	15	16	17	18	18	17
Front-to-Back Total Power at 180° ± 30°, dB	24	23	25	27	25	27
CPR at Boresight, dB	18	20	18	20	21	23
CPR at Sector, dB	10	12	9	13	12	9

Mechanical Specifications

Wind Loading at Velocity, frontal	301.0 N @ 150 km/h 68.8 lbf @ 150 km/h
Wind Loading at Velocity, lateral	254.0 N @ 150 km/h 57.1 lbf @ 150 km/h
Wind Loading at Velocity, maximum	143.4 lbf @ 150 km/h 638.0 N @ 150 km/h
Wind Loading at Velocity, rear	319.0 N @ 150 km/h 71.7 lbf @ 150 km/h
Wind Speed, maximum	241 km/h 149.75 mph

Packaging and Weights

SBJAH4-1D65B-DL

Width, packed	450 mm 17.717 in
Depth, packed	355 mm 13.976 in
Length, packed	1975 mm 77.756 in
Net Weight, without mounting kit	26.5 kg 58.422 lb
Weight, gross	40.1 kg 88.405 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance



Included Products

BSAMNT-3 — Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance