



Features


- Dual-band configuration supports 700MHz and 800MHz public safety bands
- Supports P25 P1/P2 digital and conventional analog communications simultaneously
- Supports FirstNet™ LTE Band 14 (Class B)
- Up to 32 narrow band filters (Class A) / 3 wide band filters (Class B)
- 2W output power per band
- One Master Unit supports up to 4 or 8 Remote Units, only single strand of fiber is required from MU to RU
- Channelized Auto Level Control (ALC) supported (Class A)
- Channelized uplink squelch supported (Class A)
- Web based GUI for intelligent configuration, SNMP supported
- Built-in mandatory isolation test to prevent oscillation
- NFPA 1221 compliant dry contact alarms / NEMA 4X enclosure on MU / RUs
- **FCC:** Class A: **PX8RH-7W22-D, PX8RH-7W22-R**, Class B: **PX8RH-7W22B-D, PX8RH-7W22B-R**
- **UL 60950-1 & UL 60950-22 Compliant**

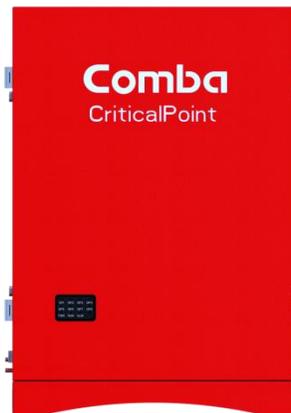


Master Unit

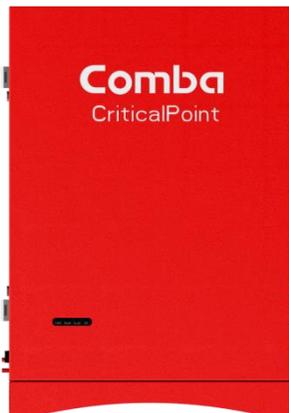

Remote Unit

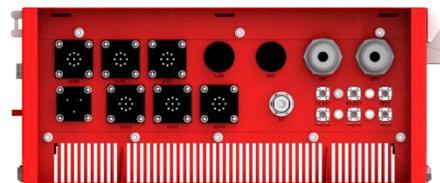

Master Unit

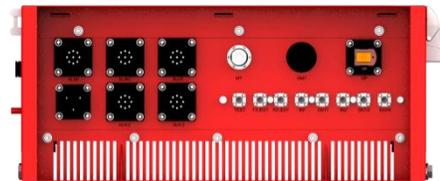

Remote Unit

Functional Block Diagram



Optical			
System			700MHz,800MHz
Optical Fiber			Single Mode
Optical Wavelength		nm	1550, 1310 + WDM
Optical Output Power	MU	dBm	-4 to -2
	RU	dBm	3 to 5
Maximum Optical Loss		dB	8
Fiber Connectors			MU: SC/APC, RU: SC/APC

Electrical (Class A)				
			700MHz	800MHz
Frequency Range	Uplink	MHz	799-805	806-817
	Downlink		769-775	851-862
Filter Bandwidth			12.5/25/75KHz	12.5/25/75KHz
Number of Filters			32	32
Total Output Power, Uplink		dBm	27	
Total Output Power, Downlink			33	33
Maximum System gain		dB	95	
Gain Adjustment Range (1dB step)		dB	MU: 0-30, RU: 0-30	
Pass Band Ripple (p-p)		dB	≤ 3	≤ 3
Spurious emission			FCC Compliance	FCC Compliance
Intermodulation		dBm	-13	-13
Uplink Noise Figure at Maximum Gain		dB	≤ 5	
System Delay		μsec	17-37	
Max UL Input w/o Overdrive		dBm	-30	
Max UL Input w/o Damage		dBm	10	
ALC Range		dB	60	
Input VSWR			≤ 1.5	
Impedance		Ω	50	

Electrical (Class B)				
			700MHz	800MHz
Frequency Range	Uplink	MHz	788-805	806-824
	Downlink		758-775	851-869
Filter Bandwidth			200KHz – 10MHz	200KHz – 10MHz
Number of Filters			3	3
Total Output Power, Uplink		dBm	27	
Total Output Power, Downlink			33	33
Maximum System gain		dB	95	
Gain Adjustment Range (1dB step)		dB	MU: 0-30, RU: 0-30	
Pass Band Ripple (p-p)		dB	≤ 3	≤ 3
Spurious emission			FCC Compliance	FCC Compliance
Intermodulation		dBm	-13	-13
Uplink Noise Figure at Maximum Gain		dB	≤ 5	
System Delay		μsec	8.5	
Max UL Input w/o Overdrive		dBm	-30	
Max UL Input w/o Damage		dBm	10	
ALC Range		dB	60	
Input VSWR			≤ 1.5	
Impedance		Ω	50	

Mechanical – MU		
Dimensions, H x W x D	in(mm)	22.4 x 15.4 x 8.5 (570 x 390 x 215)
Weight without Bracket	lb(kg)	66 (30)
Power Supply	VDC	-40 ~ -58
Power Consumption (approx.)	W	85
RF Connectors		N-Female, duplex
Fiber Connectors		SC/APC
Operating Temperature	°C	-40 to +55
Operating Humidity		≤ 95%
Ingress protection		NEMA 4X
Enclosure Cooling		Convection
MTBF		100,000 @ 77 °F

Mechanical – RU		
Dimensions, H x W x D	in(mm)	22.4 x 15.4 x 8.5 (570 x 390 x 215)
Weight without Bracket	lb(kg)	66 (30)
Power Supply	VDC	-40 ~ -58
Power Consumption (approx.)	W	Dual Band: 100, Single Band: 80
RF Connectors		N-Female, duplex
Fiber Connectors		SC/APC
Operating Temperature	°C	-40 to +55
Operating Humidity		≤ 95%
Ingress protection		NEMA 4X
Enclosure Cooling		Convection
MTBF		100,000 @ 77 °F

Note: Typical specifications at room temperature

Part Numbers

Product Type	Part Number	
	DC version	AC version
Class A		
MU Dual Band 700/800MHz, 1 to 4 x RUs	RH7W22-D7848E4	RH7W22-D78ACE4
MU Dual Band 700/800MHz, 1 to 8 x RUs	RH7W22-D7848E8	RH7W22-D78ACE8
RU Single Band 700MHz	RH7W22-R073348	RH7W22-R0733AC
RU Single Band 800MHz	RH7W22-R083348	RH7W22-R0833AC
RU Dual Band 700/800MHz	RH7W22-R783348	RH7W22-R7833AC
Class B		
MU Dual Band 700/800MHz, 1 to 4 x RUs	RH7W22-D78B48E4	RH7W22-D78BACE4
MU Dual Band 700/800MHz, 1 to 8 x RUs	RH7W22-D78B48E8	RH7W22-D78BACE8
RU Single Band 700MHz	RH7W22-R07B3348	RH7W22-R07B33AC
RU Single Band 800MHz	RH7W22-R08B3348	RH7W22-R08B33AC
RU Dual Band 700/800MHz	RH7W22-R78B3348	RH7W22-R78B33AC
License (For Class A)		
Dual Band (700/800MHz) License	RH7W22-L783233	
License (For Class B)		
Dual Band (700/800MHz) License	RH7W22-L78B333	