

MD256 SERIES Mobile duplexer, 6 cavity, N female connector, 136-174 MHz,

- Compact and rugged design, ideal for mobile applications
- Low insertion loss for optimal system performance
- High isolation to minimize interference
- Tx-Rx spacing: 4.5 to 5.2 MHz; 8 to 10 MHz

MD256 series is Sinclair's new line of mobile duplexer that features six resonators for outstanding performance. This duplexer allows bi-directional communication over a common antenna and is ideal for applications that call for a compact rugged unit, such as in vehicles, or where space is constrained.

See below chart for detailed ordering information, and specify Tx and Rx frequencies when ordering. Other connector types are also available, please call for details

Part#	Connector	Frequency range	Separation
MD256N-1-1	N(f)	136-148 MHz	4.5 to 5.2 MHz
MD256N-1-2	N(f)	136-148 MHz	8 to 10 MHz
MD256N-2-1	N(f)	148-160 MHz	4.5 to 5.2 MHz
MD256N-2-2	N(f)	148-160 MHz	8 to 10 MHz
MD256N-3-1	N(f)	160-174 MHz	4.5 to 5.2 MHz
MD256N-3-2	N(f)	160-174 MHz	8 to 10 MHz



N female connector model shown. Image for illustration only and may not be an exact representation of product.

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.co
Product Specification Sheet		MD256 SERIES	Issue: 0	m Dated: 20-04-20

Electrical Specifications

Frequency Range	MHz	136 to 174
Number of Cavities - Low Pass Side		3
Number of Cavities - High Pass Side		3
Connectors		N-female
Input VSWR (max)		1.5:1
Insertion Loss (max) Tx to Ant	dB	1.5
Impedance	Ω	50
Average Input Power (max)	W	50
Isolation (min)	dB	80

Notes

Mechanical Specifications


Width	in (mm)	6.05 (154)
Depth	in (mm)	7.03 (179)
Length/ Height	in (mm)	1.25 (32)
Weight	lbs (kg)	2.2 (1)
Mounting configurations		mounting holes on unit
Actual shipping weight	lbs (kg)	2.7 (1.23)
Shipping dimensions	in (mm)	13x9x3 (330x229x76)

Ordering Information

Specify Tx and Rx frequencies when ordering.

Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

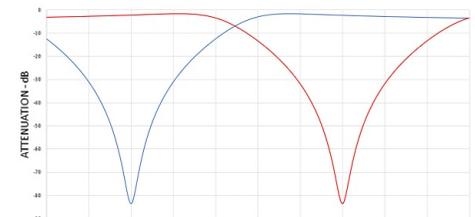

Typical response curve for 5 MHz separation

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.co
Product Specification Sheet		MD256 SERIES	Issue: 0	m Dated: 20-04-20