

PR-LLPG508

PASSENGER RAIL ANTENNA (NFPA-130)

PRODUCT OVERVIEW

This multi-band antenna, PR-LLPG508, meets rail industry standard EN 50155 (environmental) and NFPA-130 fire safety requirements. Rail compliant cable conduit support is available as an option.


The 5-cable PR-LLPG508 passenger rail antennas include 2x Global 5G Sub-6 antennas, 2x WiFi antennas, and a GNSS antenna. This provides MIMO (multiple-input-multiple-output) coverage for both Cellular and WiFi.

This 5G Sub-6 antenna covers: 617-960 & 1710-6000 MHz. The WiFi 6 (802.11ax) element covers 2.4 & 5 GHz and is backward compatible with earlier generations of the 802.11 protocol. The GNSS element operates on GPS, Galileo, Glonass, QZSS, or Beidou at 1561, 1575, & 1602 MHz.

Visit our [eStore](#) to customize an Antenna online.



PR-LLPG508-3C3C3C3C2C-BLK-180

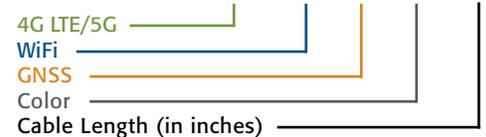

Electrical Specifications		
Frequency & Gain	4G LTE/5G Cables 1 - 2	617 - 700 MHz, 1 dBi 700 - 960 MHz, 3 dBi 1700 - 2700 MHz, 4 dBi 3400 - 4200 MHz, 6 dBi 4900 - 6000 MHz, 6 dBi
	WiFi Cables 3 - 4	2.4-2.5 GHz, 4 dBi 4.9-6.0 GHz, 5 dBi
	GNSS Cable 5	1561, 1575, & 1602 MHz, LNA 26 dB, 5 dBi (RHCP)
VSWR	< 2.5:1 VSWR	
Impedance	50 Ohm Nominal	
Power Rating	10 Watts	
GNSS	Amplifier Bias Voltage	2.7 to 5 VDC
	Gain	26 dB, 5 dBi
	Current	20 mA max, 10 mA typical

Mechanical Specifications	
Radome Material & Color	PC Plastic, Available in Black
Radome Dimension	9.00" (228 mm) x 3.50" (89 mm) x 1.25" (31.8 mm) in Height
Standard Connectors	SMA Plugs (Male)
Cables	15 Feet (4.5 m) Cables: LMR195-F for LTE/5G & WiFi, LMR-100-FR for GNSS, Other Lengths Available
Operating Temperature	-40° to +80° C
Mounting	Thru Hole, Ground Plane Dependent
Shock & Vibration	IEEE1478, EN 50155, EN 61373, MIL-810G, TIA 329.2-C
Water Ingress	IP67 (When Properly Mounted)
Flammability Rating	NFPA-130, EN 45545

HIGHLIGHTS:

- Multiband:
2x 5G Sub-6, 2x WiFi 6, 1x GNSS
- 5G Cellular Coverage 617-6000 MHz
- High Performance, High Gain
- Made-in-the-USA & UK

RELATED MODELS:

- PR-LLP508
(GPS Model)
- PR-LTMG508
(Same Freq, LTM Model)
- PR-NXD-W
(4x WiFi)

COMMON APPLICATIONS:

- Passenger Railroad
- Installation requiring EN 50155 and NFPA-130 compliance
- Advanced Multiband Modems
- Tall Vehicles with Height Restrictions
- Fixed Site with Vandalism Risks



US Headquarters +1.847.671.6690 • US/CA Toll Free +1.800.648.2800
European Facility +44.1543.459555 • www.MobileMark.com

Moving Wireless Forward®