

COMTELCO

Technical Specification

A46450WB W, WB B

WIDE BAND 450-512 MHz

LOW PROFILE UHF ANTENNA


Performance: These antennas provide unity gain in a design for heavy duty service. They have a power handling capacity of 200 watts. These antennas operate across the the UHF band from 450-512MHz.

Stylish and Durable: These antennas are manufactured using the finest materials and finishes available. The covers are molded using UV inhibited ABS plastic and are available in black or white finishes.

Standard Mounting: These antennas mate with the standard TAD/NMO mount, providing an excellent moisture seal and reliable performance.



Vertical Pattern

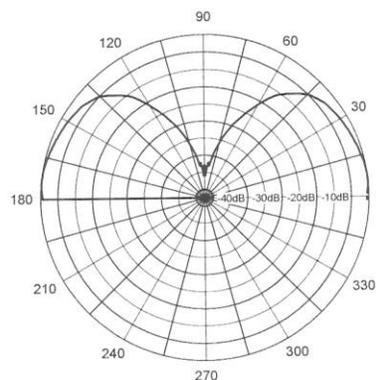

SPECIFICATIONS:

FREQUENCY RANGE:	450-512MHz
BANDWIDTH:	62MHz
GAIN:	Unity
IMPEDANCE:	50 ohms
POWER RATING:	200 watts
VSWR:	2:1
BASE:	ABS Spring loaded contact
TERMINATION:	Standard TAD/NMO
HEIGHT:	4"
DIAMETER:	1.5"
COLOR:	-W White or -B Black