Sabre Site Solutions™
A Division of Sabre Communications Corporation

1800 TLWD Guyed Tower Anchor Shafts

Item # C30-129-026

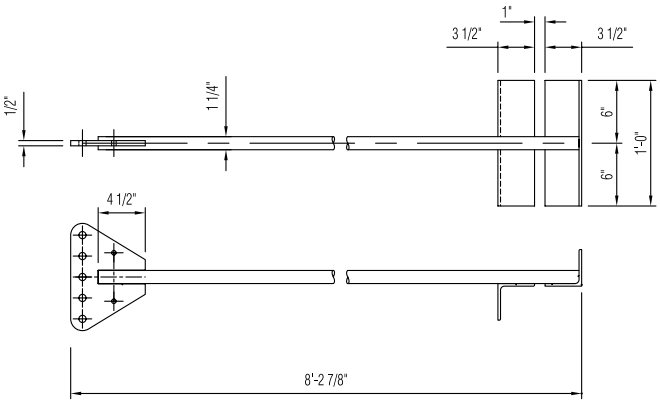

Item # C30-129-032

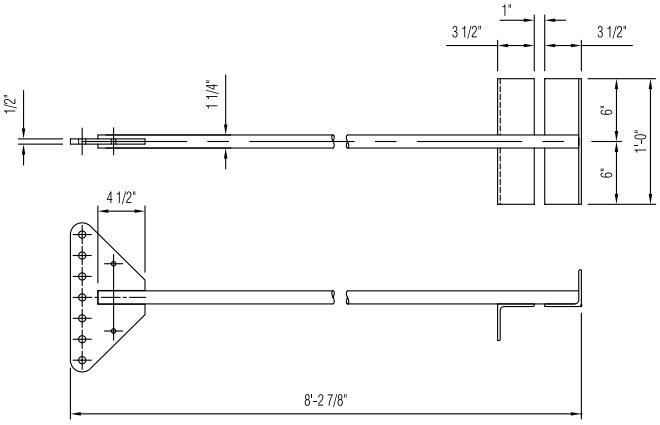

Item # C30-129-027

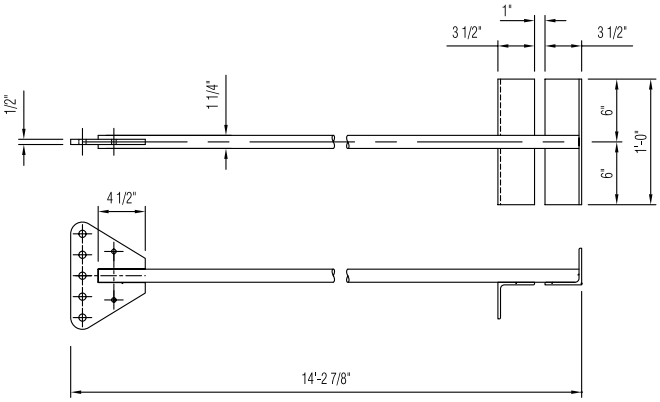

Item # C30-129-033

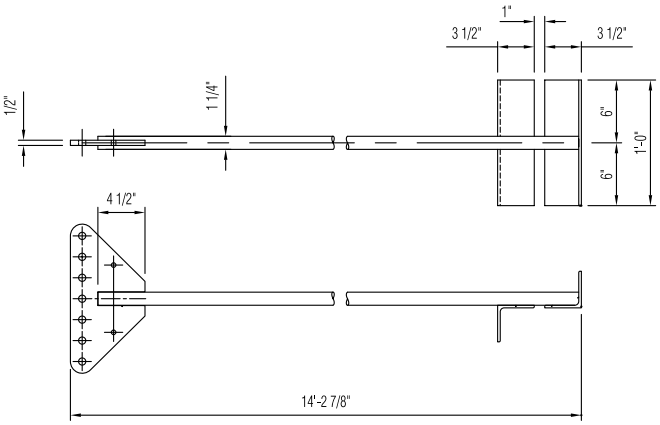

Item Number	Anchor Length	Anchor Head Hole Size	Plate Thickness	Rod Diameter	Guy Wire Size (EHS)	Turnbuckle Required	Critical Anchor Rod Slopes (from Horizontal) Min.°	Max.°	Anchor Block Depth	Anchor Shaft Capacity (Including 1/3 allowable stress increase)
C30-129-026	8'-2⅞"	(5) ¾"	½"	1¼"	3/16" & ¼" 5/16" & ⅜"	½" ¾"	32 32	50 50	4'-0" (A4, B4) 4'-0" (A4, B4)	49.1K
C30-129-032	8'-2⅞"	(7) ¾"	½"	1¼"	3/16" & ¼" 5/16" & ⅜"	½" ¾"	32 32	50 50	4'-0" (B4) 4'-0" (B4)	49.1K
C30-129-027	14'-2⅞"	(5) ¾"	½"	1¼"	3/16" & ¼" 5/16" & ⅜"	½" ¾"	36 36	46 46	8'-0" (A8) 8'-0" (A8)	49.1K
C30-129-033	14'-2⅞"	(7) ¾"	½"	1¼"	3/16" & ¼" 5/16" & ⅜"	½" ¾"	36 36	46 46	8'-0" (A8) 8'-0" (A8)	49.1K