


ELECTRICAL SPECIFICATIONS

FREQUENCY: DC - 6.0 GHz
IMPEDANCE (NOMINAL): 50 OHMS
VSWR (MAX):
 DC - 2.0 GHz: 1.10 : 1
 2.0 - 4.0 GHz: 1.25 : 1
 4.0 - 6.0 GHz: 1.45 : 1
POWER (AVG): 2 WATTS
 (Peak): 500 WATTS

MECHANICAL SPECIFICATIONS

CONNECTOR: TNC-MALE, BRASS, ALBALOY PLATE
PIN: TNC-FEMALE, BERYLLIUM COPPER, GOLD PLATED
HOUSING: BRASS, ALBALOY PLATE
INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
WEIGHT: 0.9 oz.

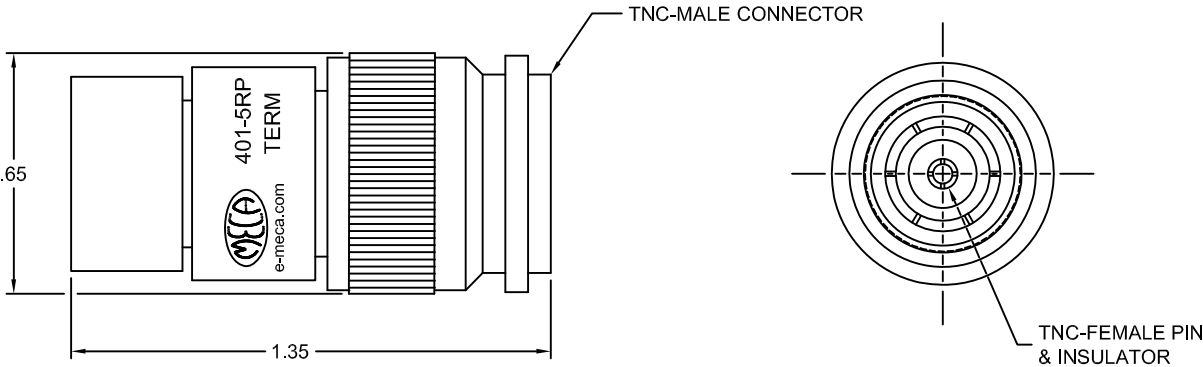

D		SEE DCN # 080808-5	08/11/08	GQ	RR	MATERIAL:		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES				ELECTRONICS, INC. DENVILLE, NEW JERSEY e-meca.com	
						SEE ABOVE		TOLERANCES 2 PLACES: ±.02 3 PLACES: N/A ANGLES: N/A					
						FINISH:		TIR: N/A		TITLE TERMINATION, 50 OHMS, 2 WATTS, TYPE TNC-MALE, REVERSE POLARITY			
						SEE ABOVE							
DRAWN:		DATE:		SCALE: NTS		SIZE	CODE IDENT. NO.	DRAWING NO.	REV				
RWA		09/19/02											
APPROVED:		DATE:		SHEET: 1 OF 1									
MJD		09/19/02				A	22424	401-5RP	D				
LTR	PG	DESCRIPTION	DATE	DR	APP								