

REVISIONS				
REV.	DESCRIPTION	ECN	DATE	APPROVED
B	REFER TO ECN	13066	01/07/15	KAD

### MAXIMUM CHARACTERISTICS

#### Application:

The DRDC Series Din-Rail surge suppressors are modular, high-speed, high-current, solid-state devices designed to protect electronic equipment and systems from transient overvoltages. The suppressor limits the magnitude of transient overvoltages that may occur on low voltage DC power lines, 4-20mA current loops or low frequency data lines. Data lines that benefit from DRDC suppression include: Ethernet, RS-485/232, Profibus, Foundation Fieldbus, DH+ or DeviceNet.

The DRDC Series surge suppressors utilize only silicon avalanche suppression diodes (SASD). The suppressor provides continuous, bipolar protection and automatically resets after a surge event with no degradation to its protection capabilities.

The suppressor includes a removable module with a base that mounts on a standard 35mm DIN (EN5022) rail. The suppressor size and form factor allows for convenient replacement of existing terminal blocks. The suppressor connects in a series (pass-through) configuration, the screw terminals accept two wire pairs (28 - 12AWG), and the device is rated for up to 10A of continuous current. Note: The DRDC surge suppressor REQUIRES that the DIN rail have a low impedance path to Earth ground.

The DRDC Series suppressors are approved for hazardous locations that require a rating of **Class1 Division 2, Groups A, B, C, D.**

#### Electrical Service:

**Input/Output Connection:** 28-12AWG Screw Terminal

**Configuration:** 2 pair / 4 wire

**Protection Modes:** L-G

**Pass-Through Current (Max.):** 10A

**Maximum Continuous Operating Voltage:** 64Vdc

#### Electrical Performance:

**Response Time:** 5ns (Max)

**Voltage Protection level:**

Maximum Vpl Tested to IEEE/ANSI C62.41 10/1000µs Long Wave: 100Vpk @ 134A

Maximum Vpl Tested to IEEE/ANSI C62.41 8/20µs Combination Wave: 120Vpk @ 1200A

#### Certifications:

UL 497B

Hazardous Locations: FM Approvals Class I Division 2 US, Canada and EU

#### Mechanical:

**Dimensions:** 100mm H x 12.5mm W x 100mm L



**Weight (Max):** 2 Oz.

#### Environmental:



**Storage/Operating temperature:** -40°C to +65°C

**Relative Humidity:** 95%

**NOTE:** Din-Rail must be connected to a solid earth ground for proper suppressor operation.

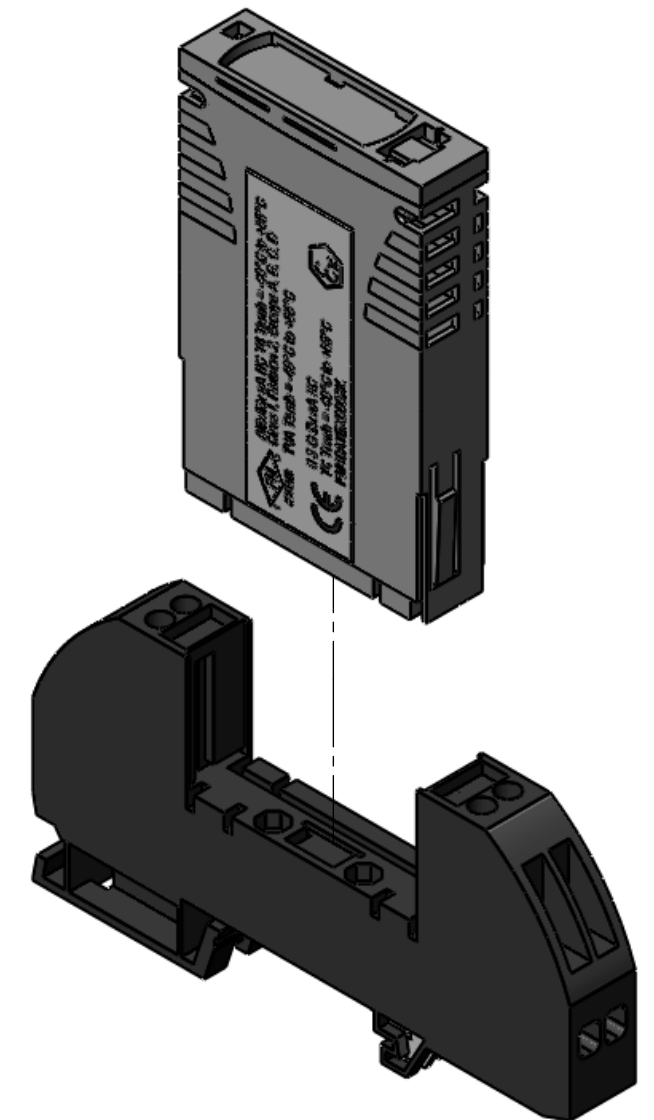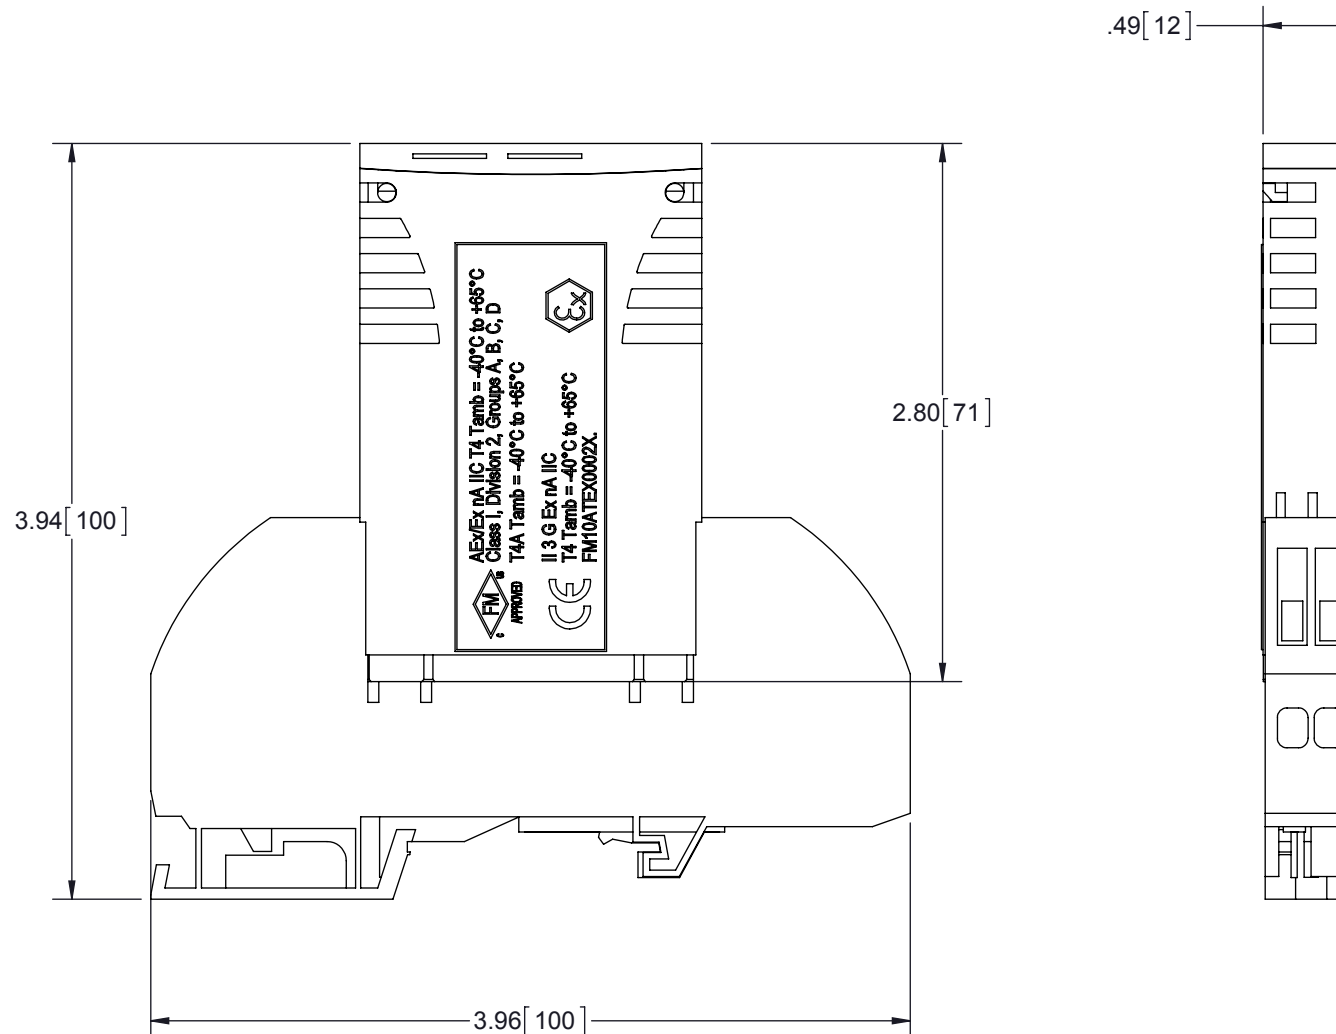

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	DRAWN	DPM	DATE			
	ENG APPD	DWR	7/16/13			
TOLERANCES: FRACTIONS=± 1/32 .XX=± .01 ANGLES=± 1° .XXX=± .005	PRODUCT MGR	MLH	8/15/13			
MATERIAL NOTED	MARKETING APPD	LJ	8/15/13			
THIRD-ANGLE PROJECTION	PROJECT NO.	TITLE			CUSTOMER PRINT	
	NOTICE: THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSECTOR SYSTEMS. ALL RIGHTS RESERVED.			DRDC 48		REV
	SIZE	CAGE	PART NUMBER	CUSTOMER SPECIFICATION		
B	30992	1101-681		1101-681		B
SCALE	PROD CAT	DOCUMENT NAME	SHEET	OF		
1:1	DCT	1101-681-C	1	1		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.