

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.


REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.

MAXIMUM CHARACTERISTICS DATA (IX-T)

TURN-ON (@10mA):
±210Vdc TYPICAL
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
±190Vdc TO ±260Vdc
 RESISTANCE:
1Ω ±20%
 DATA RATE:
UP TO 25Mbps
 MAX HOLDING CURRENT:
400mA @ +20°C
620mA @ -40°C
290mA @ +50°C
235mA @ +65°C

TERMINAL BLOCK INFORMATION

HOUSING:
POLYAMIDE, UL94V-0
 CONTACT:
COPPER ALLOY
 PLATING:
TIN
 HARDWARE:
BRASS, NICKEL PLATED
 WIRE STRIP LENGTH:
.25"
 WIRE GAUGE:
16-28 AWG
 HOLE DIAMETER:
.047"
 TIGHTENING TORQUE:
.25N-m

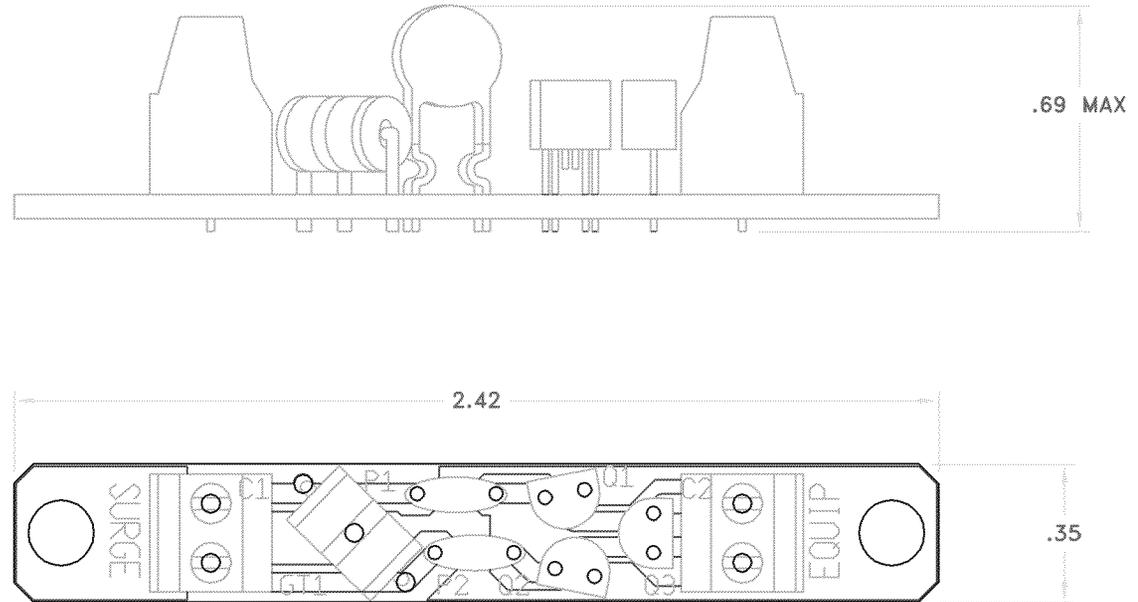

CUSTOMER APPROVAL: _____ DATE: _____
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER	DATE
R. SWART	05/24/07
MECH ENGINEER	DATE
R. DUNNING	06/04/07
ELEC ENGINEER	DATE
L. CHANG	05/29/07
MARKETING	DATE
C. PACHECO	06/04/07
QUALITY DEPT	DATE
L. JACQUES	05/29/07

PolyPhaser

P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476
 DWG NO/PART NO/DESCRIPTION

IX-10T
CUSTOMER PRINT

CAGE CODE	FILE NAME	SCALE	SHEET
61114	-C1	2/1	1 OF 1

These commodities or technology are exported from the U.S. in accordance with the Export Administration Regulations. Diversion contrary to U.S. law prohibited.