



Omnidirectional Fiberglass Antenna, 450-512, 2.1dBi, N Female

Product Description

These antennas feature a very broad frequency band and rugged construction. Radiating elements are constructed of copper alloy, encased in a weather resistant low loss fiberglass radome. The BA6110 "Heavy Duty" is permanently affixed to a unique mounting fixture which allows mounting on top of or along-side of most vertical supports. Due to their wide bandwidth, they are ideal for use as emergency backup antennas. Their size and mounting fixtures allow for easy storage and fast installation.



BA6110 Series

Features/Benefits

• **Broadband – reduces backup inventory and the need for multiple antennas.** • **Fiberglass radome protects radiating elements in hostile environments.** • **Copper elements maximize system performance while minimizing the possibility of intermod.**

Technical Specifications

Frequency Range, MHz	450-512
Horizontal Pattern	OmniDirectional
Antenna Type	Fiberglass Omni
Electrical Downtilt, deg	0
Gain, dBi (dBd)	2.1 (0)
Vertical Beamwidth, deg	78
Polarization	Vertical
VSWR	< 1.5:1
Impedance, Ohms	50
Maximum Power Input, W	500
Lightning Protection	Direct Ground
Connector Type	N Female
Connector Location	Bottom
Weight, kg (lb)	3 (6.6)
Mount Type	Fixed
Mounting Hardware	Stainless Steel U-Bolts (E380-03F)
Rated Wind Speed, km/h (mph)	160 (100)
Flexible Extensions	None
Overall Length, m (ft)	0.94 (3.1)
Element Housing Length, m (ft)	0.82 (2.7)
Mounting Pipe Diameter, m (in)	0.08 (3)
Support Pipe Length, m (ft)	0.32 (1.04)
Radiating Element Material	Brass
Element Housing Material	Fiberglass
Radome Color	White RAL9010
Support Pipe Material	Black Anodized Aluminum
Max Wind Loading Area, m ² (ft ²)	0.07 (0.75)
Bend Mom @ Rated Wind 1" Below Top of Mt Pipe, N m (ft lbf)	42 (31.2)
Wind Load - Side @ Rated Wind, N (lbf)	209 (47)
Shipping Weight, kg (lb)	4 (8.8)
Shipping Dimensions of Accessory - HxWxD, m (ft)	Packed w/ antenna


Notes

Other Documentation

All information contained in the present datasheet is subject to confirmation at time of ordering



Omnidirectional Fiberglass Antenna, 450-512, 2.1dBi, N Female

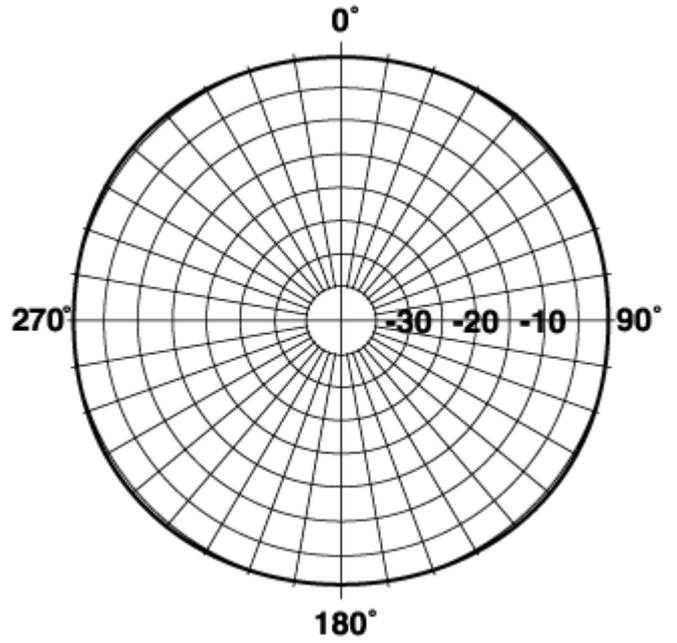

All information contained in the present datasheet is subject to confirmation at time of ordering