

## B4505CN

### Base Loaded Mobile Antennas 450-470 MHz

TE Connectivity's ongoing commitment to refinement in mechanical and electrical design results in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless-steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold-plated push pin contacts make TE Connectivity the obvious choice for quality and long-lasting value for demanding mobile radio communications.

#### FEATURES AND BENEFITS

- Long tuning ferrule allows for greater freedom in minor frequency adjustment. Tuning chart included
- High performance mobile antenna operates on a no ground plane (NGP) requirement
- Straight stainless-steel corona ball stays on the rod - no dissimilar metal interaction associated with competitor designs
- Easy installation with NMO mountable
- 100% tested on a network analyzer

#### APPLICATIONS

- Public safety
- Transportation
- Utility
- Military mobile

#### ELECTRICAL SPECIFICATIONS

Model Name	B4505CN/BB4505CN/B4505CNS/BB4505CNS
Operating Frequency (MHz)	450-470
VSWR - Avg	≤ 2.0:1
Gain (dBi)	5
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Pattern	Omni-directional
Polarization	Vertical
Vertical Plane 3 dB Beamwidth (°)	28
Horizontal Plane 3 dB Beamwidth (°)	360

#### MECHANICAL SPECIFICATIONS

Dimensions - height x diameter - mm (inches)	820 x 36.57 (32.25 x 1.44)
Weight - g (oz.)	205.5 (7.25)


## ENVIRONMENTAL SPECIFICATIONS

Indoor or Outdoor	Outdoor
Storage Temperature - °C (°F)	-35 to +85°C (-31 to +185°F)
Material Substance Compliance	RoHS

## CONFIGURATION

PART NUMBER	CONNECTOR
B4505CN	NMO
BB4505CN	NMO
B4505CNS(R)	NMO
BB4505CNS(R)	NMO

## RADIATION PATTERN

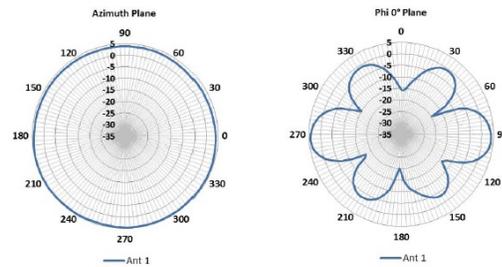

## TUNING CHART

FREQUENCY - MHZ	ROD - CM (IN.)
450	28.26 (11 1/8)
455	27.46 (10 13/16)
460	26.35 (10 3/8)
465	25.4 (10)
470	24.9 (9 13/16)

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original