
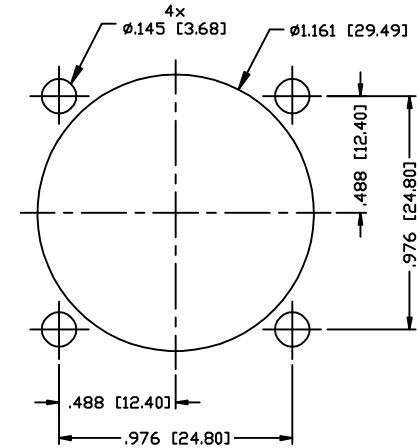
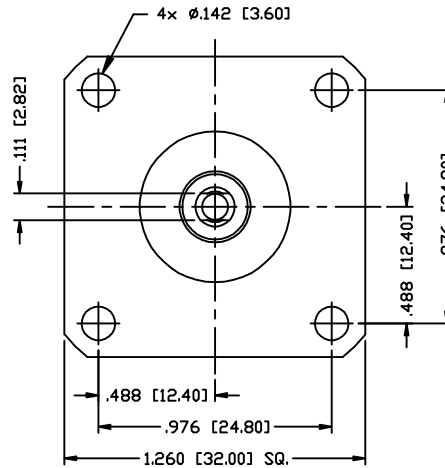


PART NO.

RFD-1640-2

REV	DESCRIPTION	DWN	DATE	APPROVED
E	CHANGED OUTER CONTACT TO SOLID CONFIGURATION	KMM	5/14/98	JDMc
F	UPDATED CONNECTOR DESIGN & DWG	CZS	07/10/01	JDMc

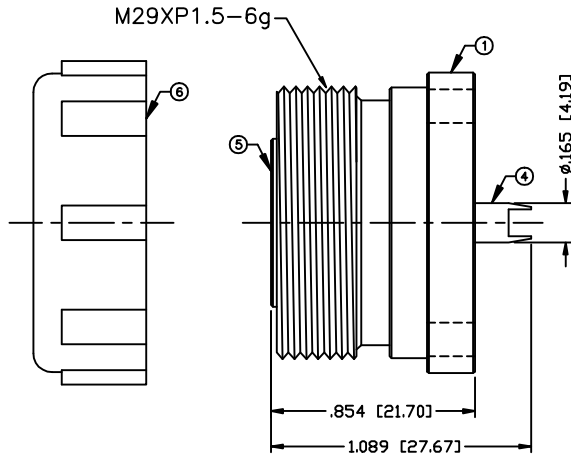

RECOMMENDED MOUNTING PATTERN

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-7.5 GHz

PEAK POWER: 13.2 Kw max.

AVERAGE POWER: 3.0 Kw max.

TEMPERATURE RANGE: -55°C TO 150°C

(E) FOR RG-8, 8A, 213/U, ALPHA 9008, 9213, BELDEN 8267, 9251, 9880, 89880, INTERCOMP 4085, 22132, TIMES AA-4478

(F) FOR RG-9, 9A, 9B, 214 & 393/U, BELDEN 8242 & 8268 CABLE

(I) FOR BELDEN 8214, 9913, 9913F, 9914, RG-8/U TYPE, CAROL C1180, TIMES AA-5886 & LMR-400 CABLE

(PL) FOR BELDEN 89913 (PLENUM) CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
6	DUST COVER	1	PE	---
5	GROUND RING	1	BRASS	SILVER, 120 μ "
4	CONTACT	1	BRASS	SILVER, 200 μ "
3	CONTACT	1	Be.Cu.	SILVER, 200 μ "
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	SILVER, 120 μ "

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUNIGA 06/05/12
CHECKEDORJ DRAWN
K. MAXWELL 7/25/95**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.**RFconnectors**
DIVISION OF RF INDUSTRIES, LTD.7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX**7/16 DIN JACK**
4 HOLE FLANGE

SIZE	CABLE GROUP	DWG NO.	REV
A	E,F,I,PL	RFD-1640-2	F
SCALE: NTS	ENGINEERING ID: 008974	SHEET 1 OF 1	