


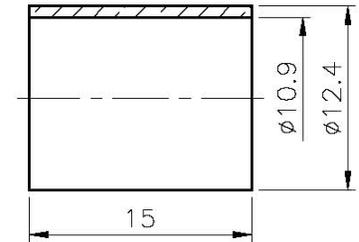


REVISIONS

ISS	SYMBOL	DESCRIPTION\DATE

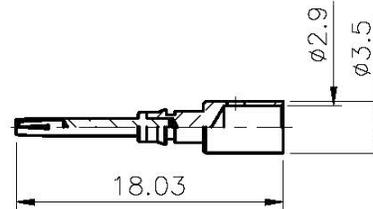


RECOMMENDED
CABLE STRIPPING DIM'S

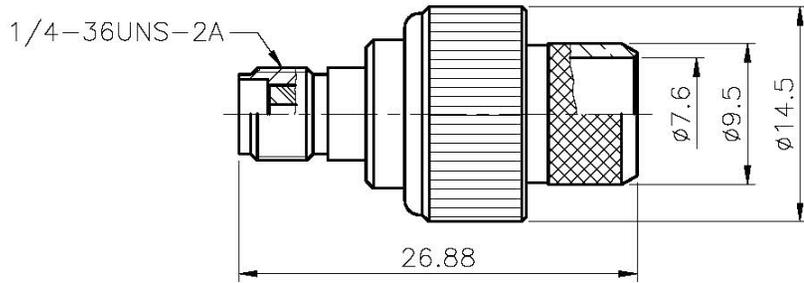

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE
HEX CRIMP SIZE .429" (10.9mm)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118" (3mm)
OR SOLDER

TESSCO

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2/1	ISSUE	PART NO.	TITLE		
	HEAT SHRINK TUBE		BLACK			DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES = ±5°			CON-17-400	TerraWave Solutions		
	FERRULE	NOTE 6	NOTE 2						APPROVED	DATE		
	CONTACT PIN	NOTE 1	NOTE 3						CHECKED	DATE		
	CONTACT PIN	NOTE 5	NOTE 3						DRAWN	DATE		
	BRAID HOLDER	NOTE 1	NOTE 2									
	INSULATOR	NOTE 4	WHITE									
	BODY	NOTE 1	NOTE 2									