
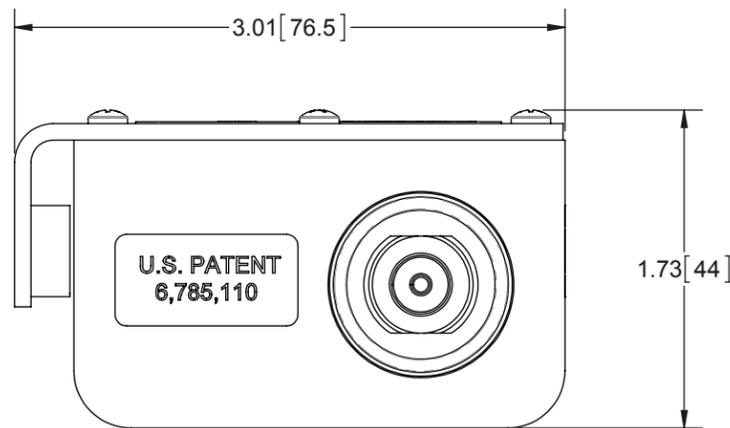
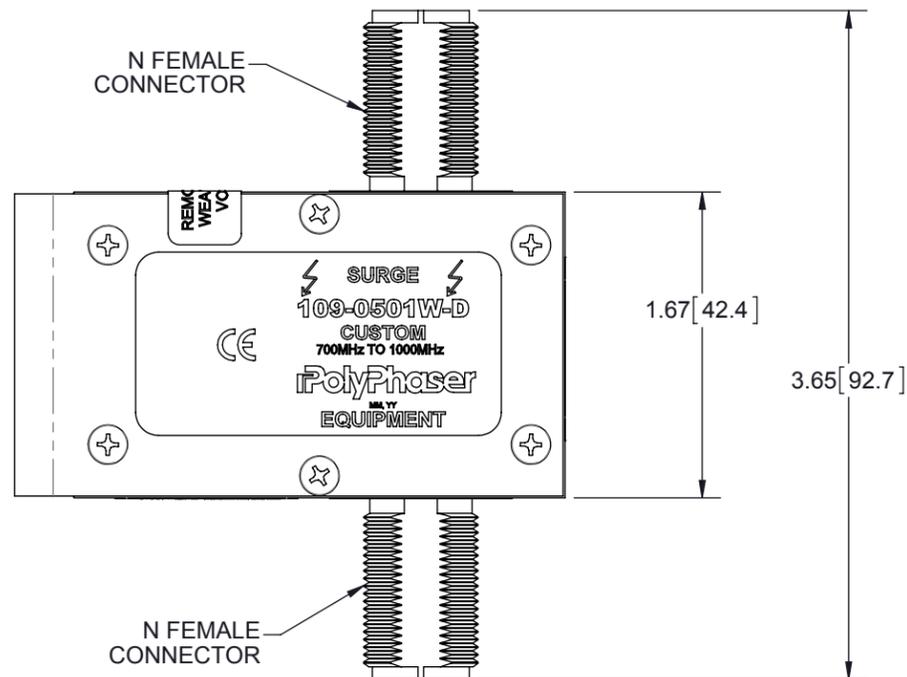


REVISIONS				
REV.	DESCRIPTION	ECN	DATE	APPROVED
B	REFER TO ECN	11913	8/8/13	KCB

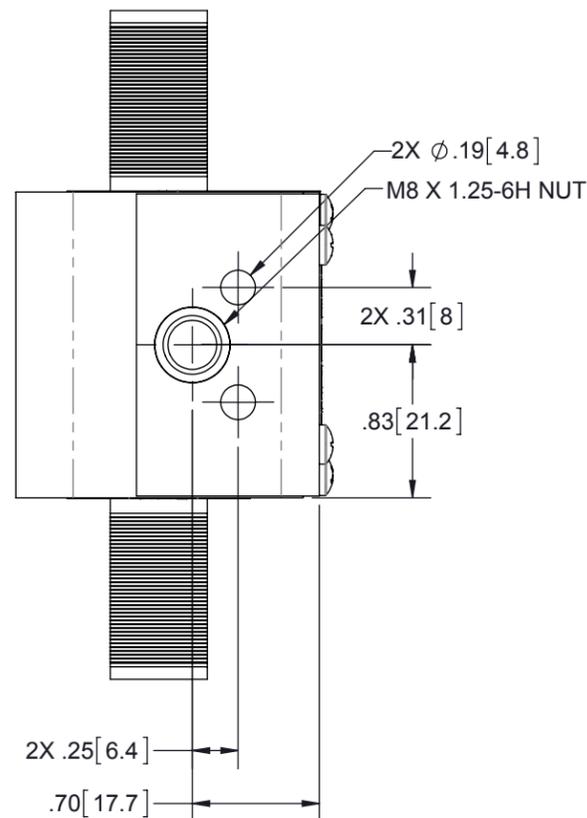

HARDWARE KIT INCLUDES:

QTY	DESCRIPTION
1	WASHER 5/16 EXT 18-8 SS
1	SCREW CAP M8X1.25X10MM
1	SILICONE O-RING 019
1	WASHER 5/8 410 SS
1	NUT 5/8-24 303 HEX SS

MAXIMUM CHARACTERISTICS

Application:
Weatherized, Flange or Bulkhead Mount

Electrical Performance:

Frequency Range: RF: 700MHz to 1000MHz
 VSWR: ≤1.1:1
 Insertion Loss: ≤0.1dB @ 700MHz to 1000MHz
 Telemetry: 2.176MHz
 Return Loss: ≥18dB
 Insertion Loss: ≤0.4dB
 Power: 750W RMS Average
 P.I.P. (Peak Instantaneous Power): 27kW Max.
 Turn On: +16.5Vdc
 Turn On Time: 4ns For 2kV/ns
 Max Surge: 20kA IEC 61000-4-5 8/20µs Waveform
 Throughput Energy: ≤500µJ for 3kA @ 8/20µs Waveform
 User Voltage: +15Vdc
 Usage Current: ≤4.0A Continuous

Mechanical:

Dimensions: 3.28" x 3.01" x 1.73"
 Weight: .5lbs

Environmental:

Meets IEC 60529 IP67
 Meets Bellcore #TA-NWT-000487
 Procedure 4.11, Wind Driven (120mph) Rain Intrusion Test.
 Operating temperature: -50°C to +85°C
 Relative Humidity: To 95%

RoHS Compliant

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		DRAWN DPM DATE 11/8/12					
TOLERANCES: FRACTIONS=± 1/32 .XX=± .03 ANGLES=± 1° .XXX=± .010		ENG APPD KCB 11/08/12					
MATERIAL		PRODUCT MGR SJD 11/12/12		TITLE 700-1000MHz 2.176MHz F/F			
THIRD-ANGLE PROJECTION		MARKETING APPD LJ 12/12/12		CUSTOMER SPECIFICATION			
NOTICE: THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR SYSTEMS. ALL RIGHTS RESERVED.		PROJECT NO.		SIZE B	CAGE 61114	PART NUMBER 109-0501W-D	REV B
				SCALE 1:1	PROD CAT RFP	DOCUMENT NAME 109-0501W-D	SHEET 1 OF 1