


| ELECTRICAL                 | SPECIFICATION                                | COMMENT                |
|----------------------------|--|------------------------|
| Minimum Return Loss (VSWR) | -28dB (1.08) 0-2 GHz<br>-25dB (1.12) 2-3 GHz | As per Anatel 75       |
| 3 <sup>rd</sup> order IMD  | -153 dBc minimum, -160 dBc typical           | As per IEC 62037-2, -3 |

| ELECTRICAL                                   | SPECIFICATION                          | COMMENT |
|--|--|---------|
| Operating Temperature<br>Storage Temperature | -55°C to +85°C<br>-55°C to +85°C       |         |
| Interface Moisture                           | No leakage, mated or unmated > 1.0 Bar |         |
| Corrosion Resistance                         | 1000 Hours                             |         |
| H.A.L.T.                                     | 40 Hours                               |         |

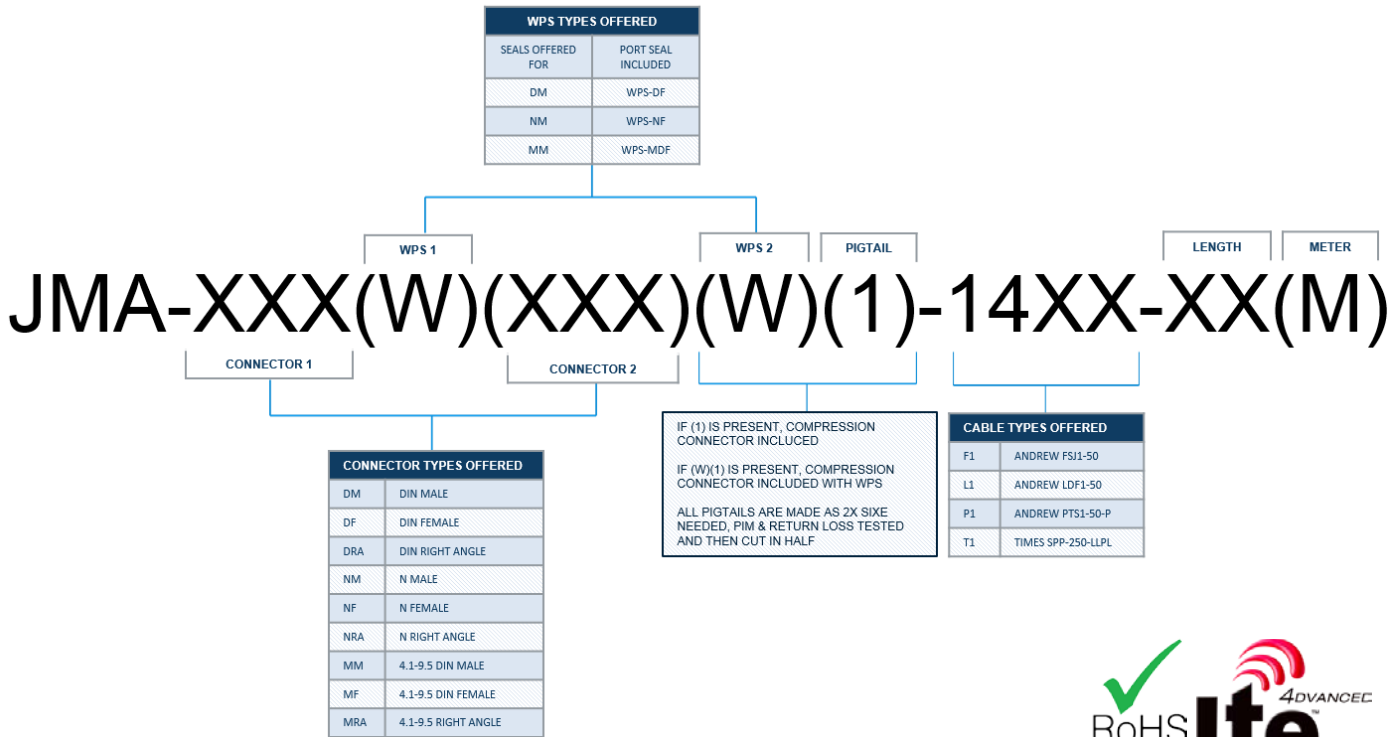

| Jumper Part Number & Description Samples |   |
|--|---|
| JMA-NMNM-14P1-3                          | Jumper, N Male - N Male, PTS1 cable, 3 foot     |
| JMA-DMWDMW-L1-2                          | Jumper, DIN Male - DIN Male, LDF1 cable, 2 foot |