

POWERED BY



## TF-M3-20

**Tower Face Mount with dual 20 ft x 3-1/2 in OD face supports, includes pipe**

### Dimensions

Face Width	6.1 m   20.0 ft
Pipe Outer Diameter	114.3 mm   4 1/2 in
Face Support Pipe Diameter	114.3 mm   4.5 in
Height	1600.2 mm   63.0 in
Length	304.8 mm   12.0 in
Weight	317.5 kg   700.0 lb
Width	6096.0 mm   240.0 in


### Environmental Specifications

EPA with 1/2 in (12 mm) radial ice	2.0 m <sup>2</sup>   21.6 ft <sup>2</sup>
EPA without ice	1.6 m <sup>2</sup>   16.8 ft <sup>2</sup>
Man Rating	250 lb vertical man load at 15 mph (BWS)

### General Specifications

Product Type	Tower face mount
Pipe Length	1600.2 mm   63.0 in
Pipe, quantity	1
Tower Taper	Non-tapered   Tapered
Includes	Crossover plates   Pipes   Saddle mounts
Material Type	Hot dip galvanized steel
Mounting	Angle 60°, 203.2 mm (8 in)   Angle 90°, 152.4 mm (6 in)   Straight or tapered legs up to 203.2 mm (8 in) OD
Note	Effective Projected Area (EPA) calculated using horizontal booms, vertical pipe mount, and mounting brackets.
Package Quantity	1

## Outline Drawing

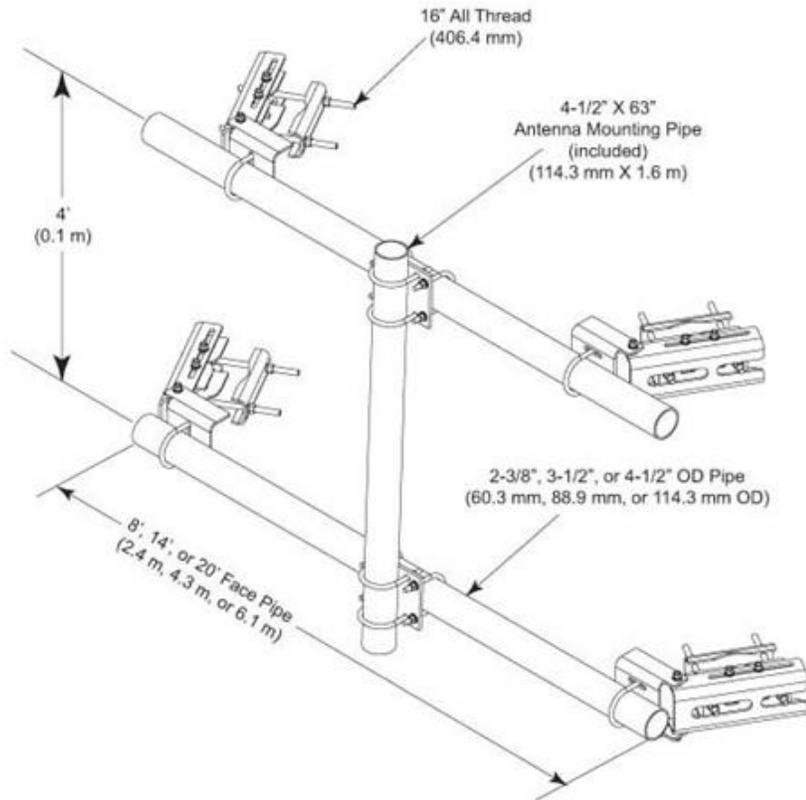

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

## Included Products

- MT-547 — Bulk Pipe, 3-1/2 in OD x 21 ft
- MT-653-63 — Plain End Pipe, 4-1/2 in OD x 63 in
- XP-3040 — Crossover Plate, joins 3-1/2 in to 4-1/2 in OD round members

### \* Footnotes

EPA with 1/2 in (12 mm) radial ice	EPA—Effective Projected Area
EPA without ice	EPA—Effective Projected Area
Man Rating	BWS—Base Wind Speed