


PowerSUM MPS100E Category 5e U/UTP Information Outlet, gray

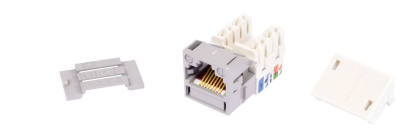

- Modified outlet termination scheme to match other Systimax outlets and to align with the MGS400 and the MGS600 outlets

Product Classification

|                       |   |
|-----------------------|---|
| Regional Availability | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| Portfolio             | SYSTIMAX®   |
| Product Type          | Modular jack  |
| Product Brand         | PowerSUM  |

General Specifications

|                   |   |
|-------------------|---|
| ANSI/TIA Category | 5e  |
| Cable Type        | Unshielded  |
| Color             | Gray  |
| Conductor Type    | Solid   Stranded  |
| Mounting Note     | Color matches with M-series Gray Faceplates and Surface Mount Boxes |
| Termination Type  | IDC   |
| Wiring            | T568A   T568B   |

Dimensions

|                                      |                   |
|--------------------------------------|-------------------|
| Height                               | 20.32 mm   0.8 in |
| Width                                | 20.32 mm   0.8 in |
| Depth                                | 30.48 mm   1.2 in |
| Compatible Conductor Gauge, solid    | 22 AWG   24 AWG   |
| Compatible Conductor Gauge, stranded | 22 AWG   24 AWG   |

Electrical Specifications

|                                       |          |
|---------------------------------------|----------|
| Contact Resistance Variation, maximum | 20 mOhm  |
| Contact Resistance, maximum           | 100 mOhm |

|  |  |
|--|--|
| <b>Current Rating at Temperature</b>                         | 1.5 A @ 20 °C   1.5 A @ 68 °F  |
| <b>Dielectric Withstand Voltage, RMS, conductive surface</b> | 1,500 Vac @ 60 Hz  |
| <b>Dielectric Withstand Voltage, RMS, contact-to-contact</b> | 1,000 Vac @ 60 Hz  |
| <b>Insulation Resistance, minimum</b>                        | 500 MOhm   |
| <b>Remote Powering</b>                                       | Fully supports the safe delivery of power over LAN cabling described by IEEE 802.3bt (Type 4) and complies with the unmating under electrical load requirements prescribed by IEC 60512-99-002 |

## Material Specifications

|                                    |  |
|------------------------------------|--|
| <b>Contact Plating Material</b>    | Precious metals  |
| <b>Material Type</b>               | Copper alloy   High-impact, flame retardant, thermoplastic |
| <b>Termination Contact Plating</b> | Nickel   |

## Mechanical Specifications

|                                       |                            |
|---------------------------------------|----------------------------|
| <b>Plug Insertion Life, minimum</b>   | 750 times                  |
| <b>Plug Insertion Life, test plug</b> | IEC 60603-7 compliant plug |
| <b>Plug Retention Force, minimum</b>  | 133 N   29.9 lbf           |

## Environmental Specifications

|                              |                                      |
|------------------------------|--------------------------------------|
| <b>Operating Temperature</b> | -10 °C to +60 °C (+14 °F to +140 °F) |
| <b>Storage Temperature</b>   | -40 °C to +70 °C (-40 °F to +158 °F) |
| <b>Relative Humidity</b>     | Up to 95%, non-condensing            |
| <b>Flammability Rating</b>   | UL 94 V-0                            |
| <b>Safety Standard</b>       | UL   cUL                             |

## Packaging and Weights

|                           |   |
|---------------------------|---|
| <b>Packaging quantity</b> | 1 |
|---------------------------|---|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |

