



CFS69271

3G/4G MicroSphere - Multiband In-Building Antenna 698-806 MHz/824-960 MHz/1710-1880 MHz/1850-1990 MHz/1920-2170 MHz/2100-2700 MHz

The widespread use of cellular phones and wireless network applications inside buildings has increased the need for antenna systems that can provide considerable gain over traditional dipole antennas. TE Connectivity's in-building wireless antennas are particularly applicable in environments where aesthetics and wide-angle coverage are necessary for successful wireless deployment. Their surprisingly small size and low profile allow the antennas to be hidden almost anywhere, providing an invisible solution for most applications.

FEATURES AND BENEFITS

- Applicable for both 3G and 4G solutions
- Global LTE 2600 band
- WiMax 2100/2300/2500
- Domestic cellular and global GSM
- Surface mount connector
- Small size allows it to be hidden almost anywhere, providing an invisible solution for many applications
- Toroidal field pattern which provides omnidirectional coverage in any plane around the long axis of the antenna and two lobes in any plane parallel to the long axis

APPLICATIONS

- Broadband wireless access service provider
- Campus, healthcare, or transportation terminals
- Indoor stadiums, industrial plants, processing stations
- Public safety radio

ELECTRICAL SPECIFICATIONS

Model Name	CFS69271-FNF/CFS69271-FSMAF					
Operating Frequency (MHz)	698-806	824-960	1710-1880	1850-1990	1920-2170	2500-2700
Gain (dBi)	1.5		3.0		4.5	
Efficiency (%)	80		85		85	
VSWR - Max (Typical)	2.1					
Nominal Impedance (Ohms)	50					
Max Power - Ambient 25°C (W)	50					
Polarization	Linear					
Horizontal Plane 3 dB Beamwidth	Omnidirectional					

MECHANICAL SPECIFICATIONS

Dimensions - H x D - cm (inches)	100.0 x 164.0 x 1.6 (3.94 x 6.46 x 0.06)
----------------------------------	--


ENVIRONMENTAL SPECIFICATIONS


Operating Temperature - °C (°F)	-40 to +70°C (-40 to +158°F)
Storage Temperature - °C (°F)	-40 to +70°C (-40 to +158°F)
Material Substance Compliance	RoHS

CONFIGURATION

PART NUMBER	CONNECTOR
CFS69271-FNF	Surface Mount N-Female
CFS69271-FSMAF	Surface Mount SMA Female

RADIATION PATTERNS

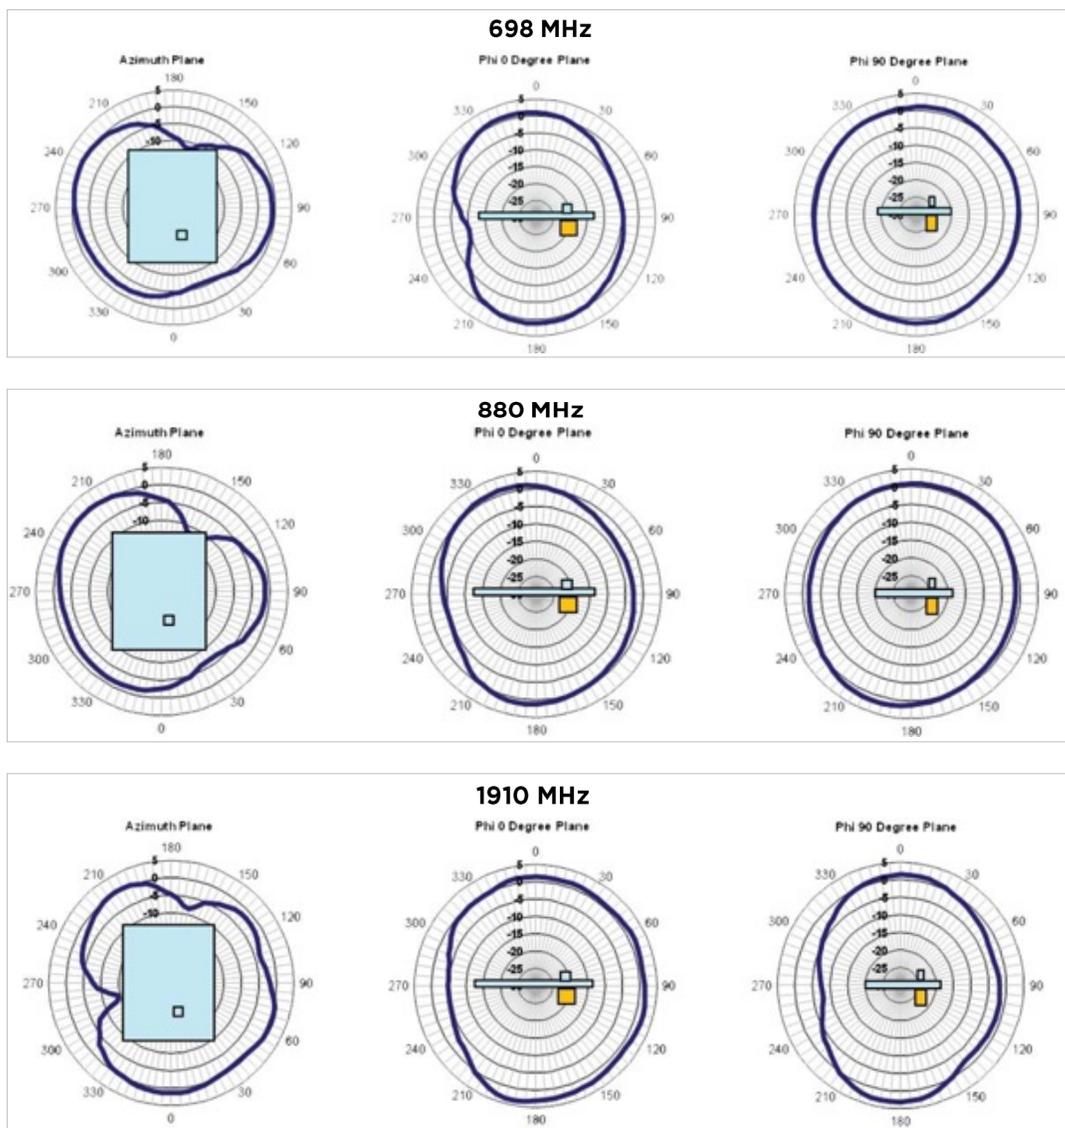

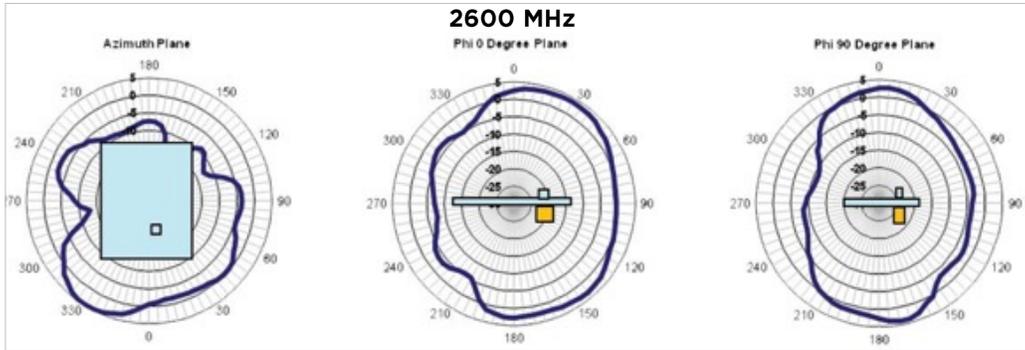

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original