

BURNDY® Products FCI

Compression

TYPE CF-FR

H-TAP - FLAME RETARDANT COVER

UL Listed to 600 Volts



600 VOLT 90° C



Features and Benefits

- One-piece design.
- ◊ No extra parts or hardware required.

Features and Benefits (continued)

- Slips over connector and latches securely shut.
- ◊ Fast, easy, reliable insulation of H-Tap compression.
- Eliminates tapping.
- ◊ Economical, fast, easy installation.
- Flash barriers.
- ◊ Protects against electrical flashover.
- CF-FR flame retardant design.
- ◊ Self-extinguishing retardant properties.
- Minimum 28 oxygen index.
- ◊ Self-extinguishing retardant properties.
- UL 94 V-O rated.
- ◊ Self-extinguishing retardant properties.

CATALOG NUMBER	MAX. CONDUCTOR ACCOMMODATED	MATCHED H COPPER CRIMPIT™	MAX. CONNECTOR LENGTH	CONNECTOR COLOR CODE
CFBG-FR	#8 AWG	YH8C8C	.65	Green
	#6 AWG	YH6C6C		Orange
CFO-FR	#2 AWG	YH2C2C	.80	Brown
CFD-FR	250 kcmil	YH292C, YH298C, YH2929	.95	Purple
CFN-FR	500 kcmil	YH3434, YH3429*	1.10	Brown
CFR-FR †	750 kcmil	YH3939, YH3931, YH4429	1.30	Yellow
	1000 kcmil	YH4434, YH4444	1.10	Yellow, White

* Use CFN-FR for single tap installation; use CFR-FR when 2 or more tap conductors are installed.

† Two-piece design packaged together.
 Note: ROHS compliant
 Note: All dimensions shown are for reference only.

TYPE CCF-FR

CLEAR H-TAP - FLAME RETARDANT COVER


UL Listed to 600 Volts



600 VOLT 90° C

Features & Benefits

- Two-Piece design with Positive Locking Latch to ensure correct installation, preventing opening after installation and eliminating the need for taping.

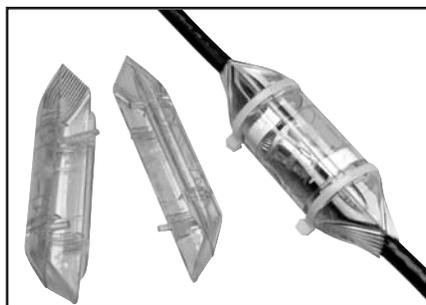

Features and Benefits (continued)

- Mounted Magnifying Lens provides increased visibility of Die Embossment on installed H-Tap Connectors.
- Made of Polished Clear Polycarbonate material that provides:
 - ◊ High visibility for inspection of installed connectors.

Features and Benefits (continued)

- ◊ Flame Retardant UL94 V-O Rated Material –self-extinguishing retardant properties
- ◊ High Impact design
- Built in Channels to accommodate and hold Cable ties, Hook & Loop ties, or Waxed Cord, securely in place after installation.
- Patented highly flexible fingers designed to contour around the conductor.
- Internal pockets designed to accommodate Identification tags (4 ID tags included).
- Molded barriers prevent installed H-Tap Connectors from Electrical Flashover.
- Covers come packaged complete with (2) Cover Halves, (2) Cable Ties and (4) Identification Labels
- CCF-FR Covers are RoHS compliant.

CATALOG NUMBER	MAX. CONDUCTOR ACCOMMODATED	MATCHED H COPPER CRIMPIT™	MAX. CONNECTOR LENGTH	CONNECTOR COLOR CODE
CCFBG-FR	#8 AWG	YH8C8C	.65	Green
	#6 AWG	YH6C6C		Orange
CCFO-FR	#2 AWG	YH2C2C	.80	Brown
CCFD-FR	250 kcmil	YH292C, YH298C, YH2929	.95	Purple
CCFN-FR	500 kcmil	YH3434, YH3429*	1.10	Brown
CCFR-FR	750 kcmil	YH3939, YH3931, YH4429	1.30	Yellow
	1000 kcmil	YH4434, YH4444	1.10	White

* Use CCFN-FR for single tap installation; use CCFR-FR when 2 or more tap conductors are installed.

Note: ROHS compliant
 Note: All dimensions shown are for reference only.