

Ventev's Micro Omni Antenna is optimized for small form factor/aesthetic and mobile Wi-Fi applications. This aesthetically pleasing antenna includes four dual-band Wi-Fi pigtails and RPSMA connectors. The antenna is an ideal partner for four connector dual-band Wi-Fi Access Points where low profile and/or aesthetics is a major deployment consideration. This multi-use antenna can also be used in vehicles for communications, location tracking, and fleet management. Every Ventev antenna is covered by the company's two-year TerraNet warranty program. For more information, contact a regional sales executive at 800-851-4965 or sales@ventev.com.




Specifications		
SKU	539825	
Model	M6025040O3D420MW	
Frequency Range	2400-2500 MHz	4900 - 5850 MHz
Bandwidth	100 MHz	950 MHz
Gain	2.5 dBi	4 dBi
VSWR	≤2	≤2
Impedance	50 ohms	
Polarization	Vertical	
Power	50 watts	
Connector	RPSMA male	
Port number	4	
Lead Length	12"	
Size	3.54" x 1.57"	
Weight	4.4 oz	
Operating Temperature	-40° F to +158° F	
Mounting Method	Surface Mount	




Installation

Outdoor Car Roof Installation

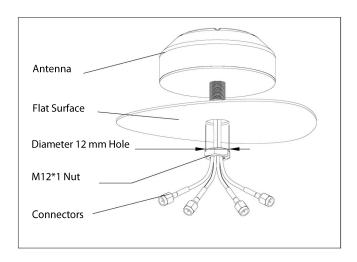

Indoor Ceiling Mount Installation

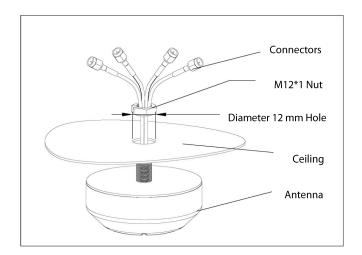



Note: The TerraWave SKU 509824 provides an L-Bracket mounting alternative for mast or wall mounting (sold separately)




Radiation Patterns


Port 1: 2450MHz







Port 1: 5500MHz






Port 2: 2450MHz










Port 2: 5500MHz







Port 3: 2450MHz






Port 3: 5500MHz








Port 4: 2450MHz





Port 4: 5500MHz

