
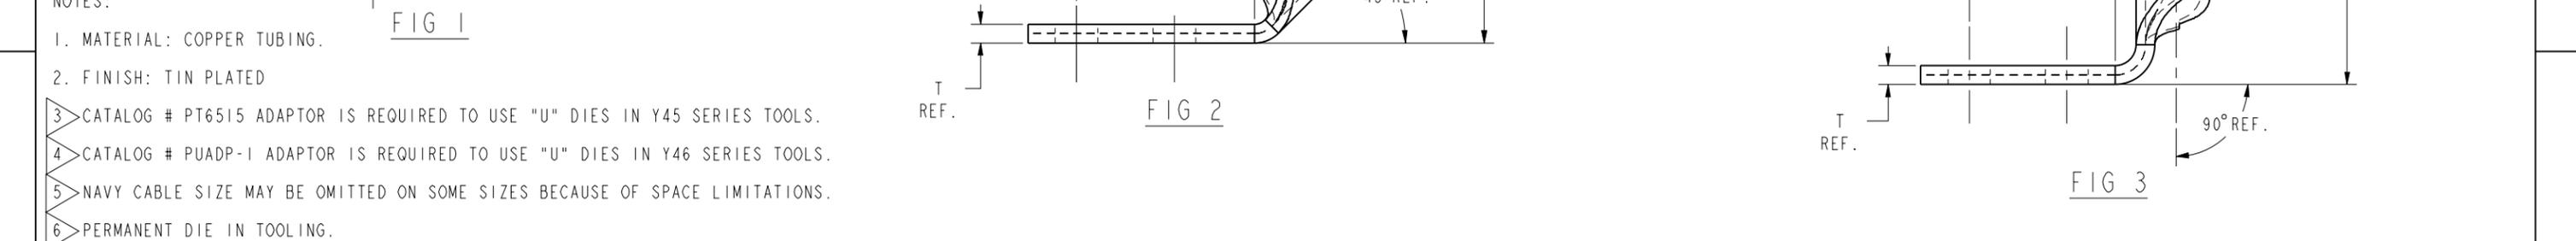
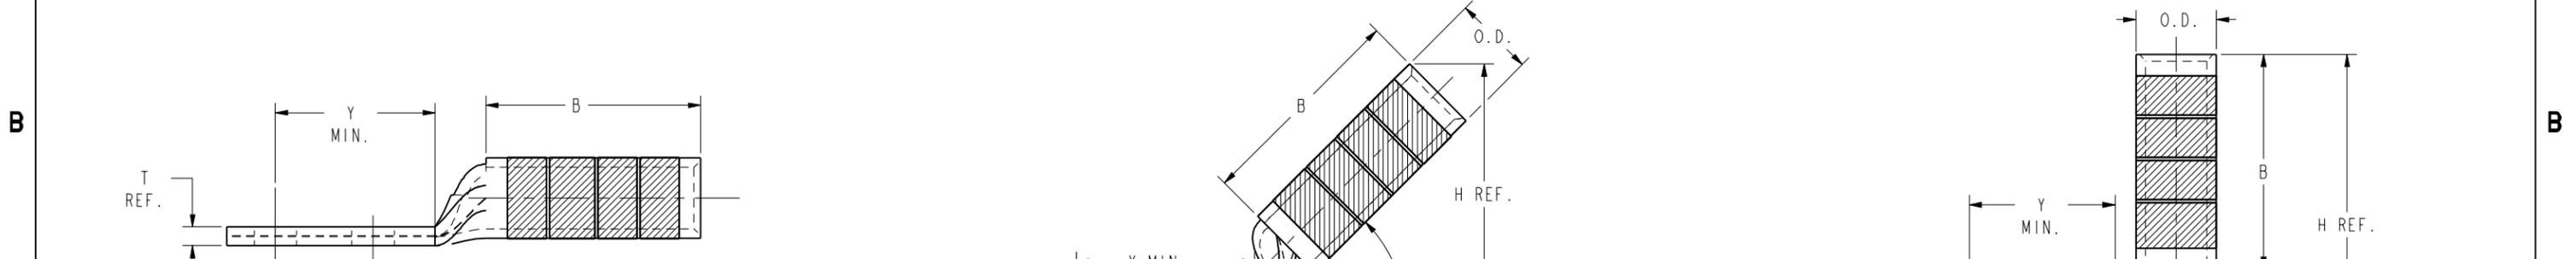


CATALOG NO.	CONDUCTOR		BOLT SIZE	FIG. NO.	DIMENSIONS										INSTALLATION TOOLING (# CRIMPS)									
	CODE (AWG)	NAVY			B	C	E	H	K DIA.	L	N	O.D.	T	Y	DIE INDEX	COLOR CODE	MECHANICAL			HYDRAULIC			DIELESS (# CRIMPS)	WIRE STRIP LENGTH
					±.06	±.04	±.02	REF.	±.02	±.09	±.04	±.01	REF.	MIN.			MD7-34R MD6	OUR840 BCT500	Y2MR	Y34A	Y750 Y35, BAT35 Y39, BAT750	Y46		
YAZ4C2TC10E2	#4 AWG [----]	40	#10 [M5]	1	1.12 [28]	.50 [13]	----	----	2.67 [68]	----	.34 [9]	.09 [2]	1.02 [26]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644, Y644M Y644MBH, Y1000 Y1000BH (1)	1-3/16
YAZ4C2TC10E245				2	1.23 [31]	.75 [19]	1.23 [31]	.21 [5]	2.48 [63]	.25 [6]	.34 [9]	.09 [2]	1.02 [26]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		
YAZ4C2TC10E290				3	1.53 [39]	.75 [19]	1.53 [39]	.21 [5]	2.48 [63]	.25 [6]	.34 [9]	.09 [2]	1.02 [26]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		
YAZ4C2TC14	#4 AWG [----]	40	1/4 [M6]	1	1.12 [28]	.50 [13]	----	.27 [7]	2.67 [68]	----	.31 [8]	----	.96 [24]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644, Y644M Y644MBH, Y1000 Y1000BH (1)	1-3/16
YAZ4C2TC1445				2	1.23 [31]	.62 [16]	1.23 [31]	.27 [7]	2.48 [63]	.31 [8]	.34 [9]	.09 [2]	.96 [24]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		
YAZ4C2TC1490				3	1.53 [39]	.62 [16]	1.53 [39]	.27 [7]	2.48 [63]	.31 [8]	.34 [9]	.09 [2]	.96 [24]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		
YAZ4C2TC14E2	#4 AWG [----]	40	1/4 [M6]	1	1.12 [28]	.50 [13]	----	.27 [7]	2.80 [71]	----	.31 [8]	----	1.09 [28]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644, Y644M Y644MBH, Y1000 Y1000BH (1)	1-3/16
YAZ4C2TC14E245				2	1.23 [31]	.75 [19]	1.23 [31]	.27 [7]	2.60 [66]	.31 [8]	.34 [9]	.09 [2]	1.09 [28]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		
YAZ4C2TC14E290				3	1.53 [39]	.75 [19]	1.53 [39]	.27 [7]	1.66 [42]	.31 [8]	.34 [9]	.09 [2]	1.09 [28]	8 OR 346	GRAY	W4CVT W4CRT (2)	W4CVT W4CRT (2)	GRAY (4)	A4CR A6CAB (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)	U4CRT U6CABT (2)		

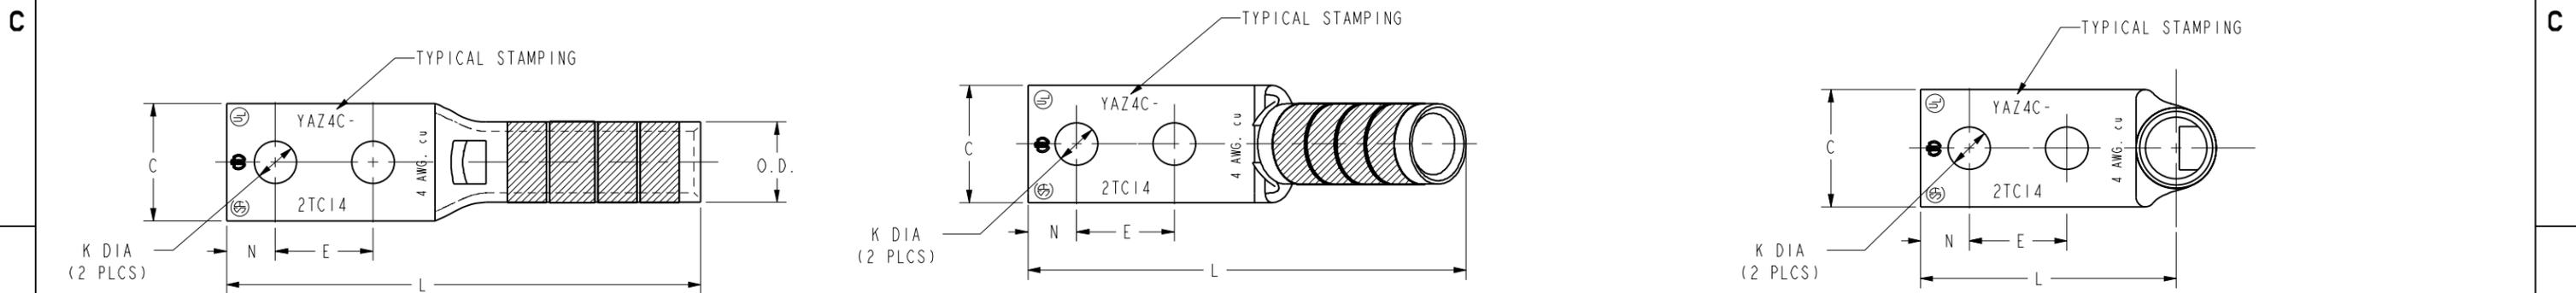

- NOTES:
- MATERIAL: COPPER TUBING.
 - FINISH: TIN PLATED
 - CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
 - CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
 - NAVY CABLE SIZE MAY BE OMITTED ON SOME SIZES BECAUSE OF SPACE LIMITATIONS.
 - PERMANENT DIE IN TOOLING.
 - DIMENSIONS, METRIC WIRE, & METRIC BOLT SIZES IN BRACKETS [] ARE IN MILLIMETERS. DIMENSIONS ARE ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
 - FOR USE BY CUSTOMERS THAT HAVE THIS HYPRESS™ NO NEW Y34A HYPRESS™ ARE BEING PROCESSED.
 - BATTERY OPERATED TOOLS.
 - THESE CATALOG NUMBERS CANNOT BE INSTALLED WITH Y45 TOOLING.

TO ORDER BURNDY® PRODUCTS CALL		HYLUG™	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: N/A	CAT. NO: YAZ4C-2TC- (SEE TABLE)
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: D. BOISVERT 11/11/98	CHECKER: K. HENRY 12/03/98
FOR PRODUCT INFO: http://www.burndy.com		DSN APPVL: B. MACDONALD 12/02/98	MFG APPVL: N/A
		GA APPVL: S. GARY 11/30/98	MKT APPVL: B. HARDGROVE 11/25/98
		PROD FAM: --	DRAWING NO: --
		PROJECT #: --	SCALE: 4:1
		DOCUMENT TYPE: Sales	SIZE: D
		REL LEVEL: Released	DRAWING NO: SE211915
			SHEET 9 OF 36