MMF, MLF, MVPHP Series



## **Heavy-Duty Magnetic Mount Series**

Black 3-1/4" diameter magnetic mount; 1-1/8"-18 thread



STANDARD CONFIGURATION						
Model	Coax	Connector	Tab	Use with PCTEL Antenna Platforms		
PCTMAG-HD	12-feet Pro-Flex Plus 195	Attached TNC Male	18-8 Stainless Steel	PCTCN Chrome Nut or BMAX Molded Coil Antennas		
PCTMAG-HD-NT	12-feet Pro-Flex Plus 195	Attached TNC Male	-	PCTWSLMR, MHB and MUF Chrome Coil and MLPV Series		





PCTMAG-HD-NT

For other cable lengths and connector configuration options, contact PCTEL Customer Service.

## **High Frequency Mounts**

1-1/8"-18 thread; Crimp on


## **STANDARD CONFIGURATION** Model **Mount Type** Coax 3/4" hole permanent microwave mount None. Purchase mating for frequencies from 0 MHz to 6.0 GHz. MMF Accommodates thickness up to .06 inches.



Connector\*

other connector options.



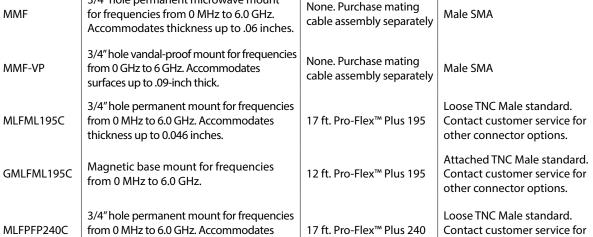



MLFML195C



GMLFML195C

For other cable lengths and connector configuration options, contact PCTEL Customer Service.

## **High Frequency Mounts For Thick Roof Surfaces**

5/8" hole; 1-1/8"-18 thread; Crimp on

thickness up to 0.046 inches.

STANDARD CONFIGURATION						
Model	Mount Type	Coax	Connector			
MVPHP	Vandal-proof permanent mount for frequencies from 0 MHz to 6 GHz. Accommodates thickness up to 1/2-inch.	None. Purchase mating cable assembly separately	N Female			



**MVPHP**