



CELLMAX-D-CPUSE

Cell-Max™ Directional In-building Antenna, 698–960 MHz, 1710–2700 MHz

- This product is part of the CommScope Wired for Wireless® Solution

Electrical Specifications

Frequency Band, MHz	698–800	800–960	1710–2170	2200–2700
Gain, dBi	5.0	5.0	8.0	6.0
Beamwidth, Horizontal, degrees	110	90	90	90
Beamwidth, Vertical, degrees	100.0	65.0	65.0	65.0
VSWR Return Loss, dB	1.8 10.9	1.5 14.0	1.5 14.0	1.5 14.0
Input Power per Port, maximum, watts	50	50	50	50
Polarization	Vertical	Vertical	Vertical	Vertical
Impedance	50 ohm	50 ohm	50 ohm	50 ohm

General Specifications

Antenna Type	Directional
Application	Indoor
Operating Frequency Band	1710 – 2700 MHz 698 – 960 MHz
Brand	Cell-Max™
Mount Type	4-hole wall mounting plate and hardware (included)
Package Quantity	1
Pigtail Cable	RG85U, plenum rated

Mechanical Specifications

Color	White
Pigtail Length	260.0 mm 10.2 in
Radome Material	ABS, UV resistant
RF Connector Interface	N Female

Environmental Specifications

Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Relative Humidity	Up to 100%

Dimensions

Depth	44.0 mm 1.7 in
Length	210.0 mm 8.3 in
Width	180.0 mm 7.1 in
Net Weight	0.4 kg 1.0 lb

Packed Dimensions

Depth	55.0 mm 2.2 in
Length	250.0 mm 9.8 in


Product Specifications

CELLMAX-D-CPUSE

Width 190.0 mm | 7.5 in
Shipping Weight 0.6 kg | 1.3 lb

CELLMAX-D-CPUSE

Outline Drawing

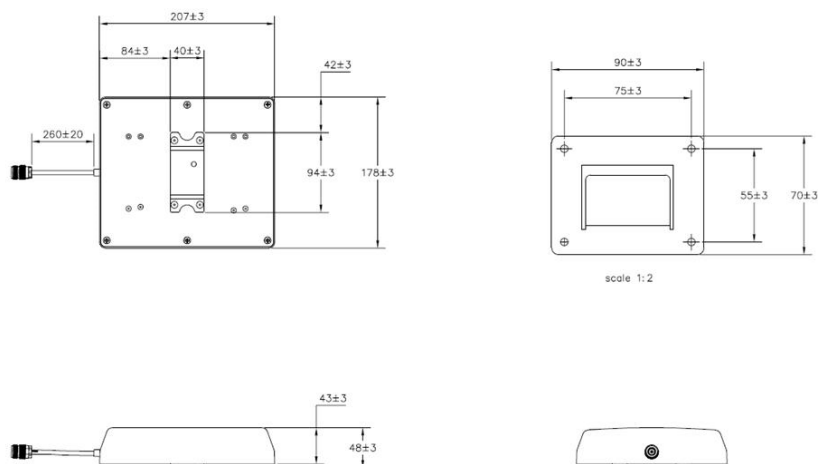

Regulatory Compliance/Certifications

Agency

RoHS 2011/65/EU
ISO 9001:2008

Classification

Compliant by Exemption
Designed, manufactured and/or distributed under this quality management system

