


# Pipe Clamps

## B2000 SERIES PIPE AND CONDUIT CLAMPS

- Safety Factor of 5
- Add PA to suffix for pre-assembled pipe clamps
- Includes Combination Recess Hex Head Machine Screw and Square Nut
- Material: 16 Ga. (1.5), 14 Ga. (1.9), 12 Ga. (2.6) ASTM A1011 33,000 PSI min. yield and 11 Ga. (3.0) ASTM A1011HSLA Gr. 50
- Standard finishes: ZN, HDG, SS4, SS6, AL

Note: For EMT sizes 2<sup>1</sup>/<sub>2</sub>" and larger use rigid conduit sizes.

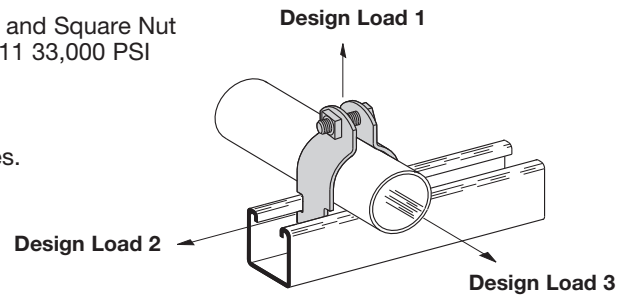

## THINWALL CONDUIT (EMT) CLAMPS

| Part No. | Conduit Size |      | Material Thickness |       | Design Load 1 |        | Design Load 2 |       | Design Load 3 |       | Wt./C |        |
|----------|--------------|------|--------------------|-------|---------------|--------|---------------|-------|---------------|-------|-------|--------|
|          |              |      |                    |       | Lbs.          | kN     | Lbs.          | kg    | Lbs.          | kg    | Lbs.  | kg     |
| B2000    | 3/8"         | (10) | 16 Ga.             | (1.5) | 400           | (1.78) | 50            | (.22) | 50            | (.22) | 10    | (4.5)  |
| B2001    | 1/2"         | (15) | 16 Ga.             | (1.5) | 400           | (1.78) | 50            | (.22) | 50            | (.22) | 10    | (4.5)  |
| B2002    | 3/4"         | (20) | 16 Ga.             | (1.9) | 400           | (1.78) | 50            | (.22) | 50            | (.22) | 11    | (5.0)  |
| B2003    | 1"           | (25) | 14 Ga.             | (1.9) | 600           | (2.67) | 75            | (.33) | 75            | (.33) | 16    | (7.2)  |
| B2004    | 1 1/4"       | (32) | 14 Ga.             | (1.9) | 600           | (2.67) | 75            | (.33) | 75            | (.33) | 19    | (8.6)  |
| B2005    | 1 1/2"       | (40) | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56) | 125           | (.56) | 28    | (12.7) |
| B2006    | 2"           | (50) | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56) | 125           | (.56) | 33    | (14.9) |

## RIGID CONDUIT OR PIPE CLAMPS

| Part No. | Conduit Size |       | Material Thickness |       | Design Load 1 |        | Design Load 2 |        | Design Load 3 |       | Wt./C |        |
|----------|--------------|-------|--------------------|-------|---------------|--------|---------------|--------|---------------|-------|-------|--------|
|          |              |       |                    |       | Lbs.          | kN     | Lbs.          | kg     | Lbs.          | kg    | Lbs.  | kg     |
| B2001    | 3/8"         | (10)  | 16 Ga.             | (1.5) | 400           | (1.78) | 50            | (.22)  | 50            | (.22) | 10    | (4.5)  |
| B2008    | 1/2"         | (15)  | 16 Ga.             | (1.5) | 400           | (1.78) | 50            | (.22)  | 50            | (.22) | 11    | (5.0)  |
| B2009    | 3/4"         | (20)  | 14 Ga.             | (1.9) | 600           | (2.67) | 75            | (.33)  | 75            | (.33) | 15    | (6.8)  |
| B2010    | 1"           | (25)  | 14 Ga.             | (1.9) | 600           | (2.67) | 75            | (.33)  | 75            | (.33) | 16    | (7.2)  |
| B2011    | 1 1/4"       | (32)  | 14 Ga.             | (1.9) | 600           | (2.67) | 75            | (.33)  | 75            | (.33) | 20    | (9.1)  |
| B2012    | 1 1/2"       | (40)  | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56)  | 125           | (.56) | 30    | (13.6) |
| B2013    | 2"           | (50)  | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56)  | 125           | (.56) | 34    | (15.4) |
| B2014    | 2 1/2"       | (65)  | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56)  | 125           | (.56) | 38    | (17.2) |
| B2015    | 3"           | (80)  | 12 Ga.             | (2.6) | 800           | (3.56) | 125           | (.56)  | 125           | (.56) | 44    | (19.9) |
| B2016    | 3 1/2"       | (90)  | 11 Ga.             | (3.0) | 1000          | (4.45) | 200           | (.89)  | 150           | (.67) | 61    | (27.6) |
| B2017    | 4"           | (100) | 11 Ga.             | (3.0) | 1000          | (4.45) | 200           | (.89)  | 150           | (.67) | 66    | (29.9) |
| B2018    | 4 1/2"       | (115) | 11 Ga.             | (3.0) | 1000          | (4.45) | 200           | (.89)  | 150           | (.67) | 70    | (31.7) |
| B2019    | 5"           | (125) | 11 Ga.             | (3.0) | 1000          | (4.45) | 200           | (.89)  | 150           | (.67) | 77    | (34.9) |
| B2020    | 6"           | (150) | 11 Ga.             | (3.0) | 1000          | (4.45) | 200           | (.89)  | 150           | (.67) | 100   | (45.3) |
| B2021    | 7"           | (175) | 11 Ga.             | (3.0) | 1000          | (4.45) | 250           | (1.11) | 200           | (.89) | 115   | (52.1) |
| B2022    | 8"           | (200) | 11 Ga.             | (3.0) | 1000          | (4.45) | 250           | (1.11) | 200           | (.89) | 128   | (58.0) |
| B2130    | 10"          | (254) | 11 Ga.             | (3.0) | 1000          | (4.45) | 250           | (1.11) | 200           | (.89) | 160   | (72.6) |
| B2132    | 12"          | (305) | 11 Ga.             | (3.0) | 1000          | (4.45) | 250           | (1.11) | 200           | (.89) | 185   | (83.9) |

Reference page 126 for general fitting and standard finish specifications.