
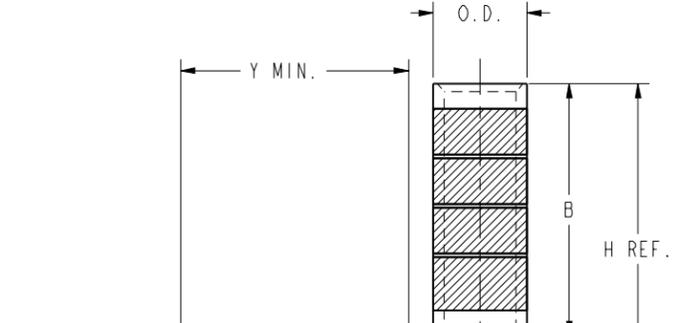
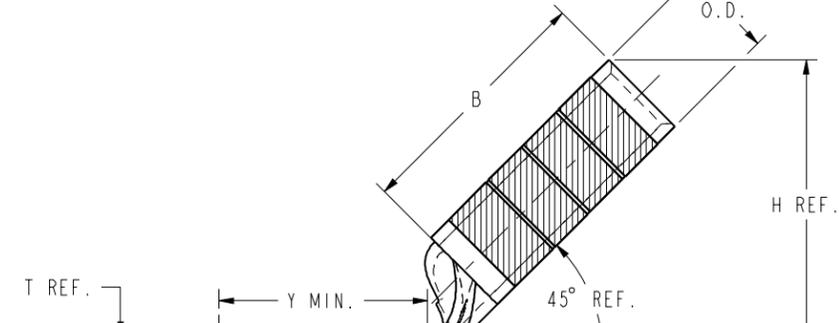
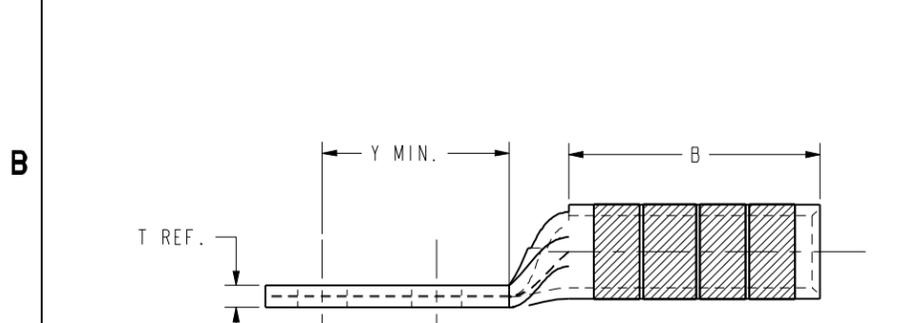
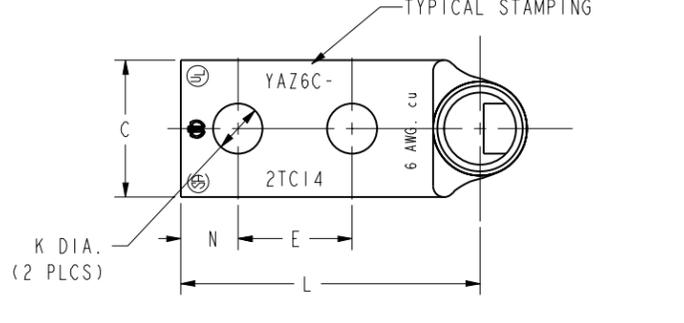
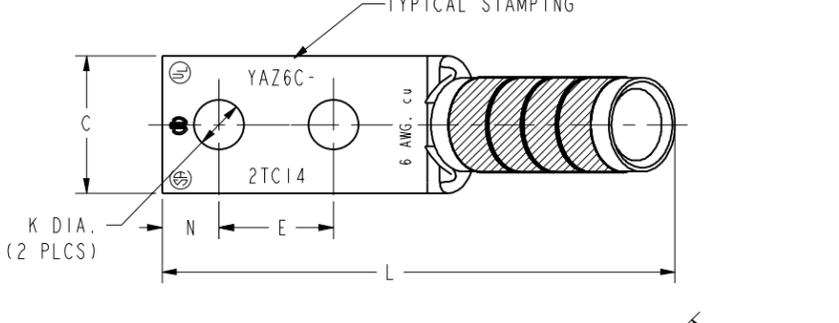


REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
E	02/01/2016 09:30:00 AM	NOTE #10 UPDATED	41185	BSB	RG

CATALOG NO.	CONDUCTOR		BOLT SIZE	FIG. NO.	DIMENSIONS										INSTALLATION TOOLING (# CRIMPS)											
	CODE (AWG)	NAVY			B ±.03	C +.04 -.02	E ±.02	H REF.	K DIA. ±.02	L ±.06	N ±.04	O.D. ±.01	T REF.	Y MIN.	DIE INDEX	COLOR CODE	MECHANICAL RATCHET			HYDRAULIC			DIELESS (# CRIMPS)	WIRE STRIP LENGTH		
																	MD7-34R MD6	OUR840	Y1MRTC6 Y122CMR	Y34A	Y750 Y35, Y39	Y46			Y45	
YAZ6C2TC14	#6 STR #6 SOL	30	1/4 [M6]	1	1.12 [28]	.45 [11]	.63 [16]	----	.27 [7]	2.65 [67]	.31 [8]	.29 [7]	.08 [2]	.96 [24]	7 OR 374	BLUE	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	MECHANICAL: MY29-11 (1)	1-3/16			
YAZ6C2TC1445								1.19 [30]																1.50 [38]	2.45 [62]	1.51 [38]
YAZ6C2TC1490								1.50 [38]																1.51 [38]	1.51 [38]	1.51 [38]
YAZ6C2TC10	#6 STR #6 SOL	30	#10 [M5]	1	1.12 [28]	.42 [11]	.63 [16]	----	.21 [5]	2.53 [64]	.25 [6]	.09 [2]	.90 [23]	7 OR 374	BLUE	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	HYDRAULIC: Y644 (1) PAT644 (1) Y81KFT (1) PAT81KFT (1)	1-3/16				
YAZ6C2TC1045								1.19 [30]															1.50 [38]	2.33 [59]	1.39 [35]	
YAZ6C2TC1090								1.50 [38]															1.39 [35]	1.39 [35]	1.39 [35]	
YAZ6C2TC10E2	#6 STR #6 SOL	30	#10 [M5]	2	1.12 [28]	.42 [11]	.75 [19]	----	.21 [5]	2.48 [63]	.25 [6]	.09 [2]	1.03 [26]	7 OR 374	BLUE	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)		1-3/16				
YAZ6C2TC10E245								1.19 [30]															1.52 [39]	2.48 [63]	1.51 [38]	
YAZ6C2TC10E290								1.50 [38]															1.52 [39]	1.52 [39]	1.52 [39]	

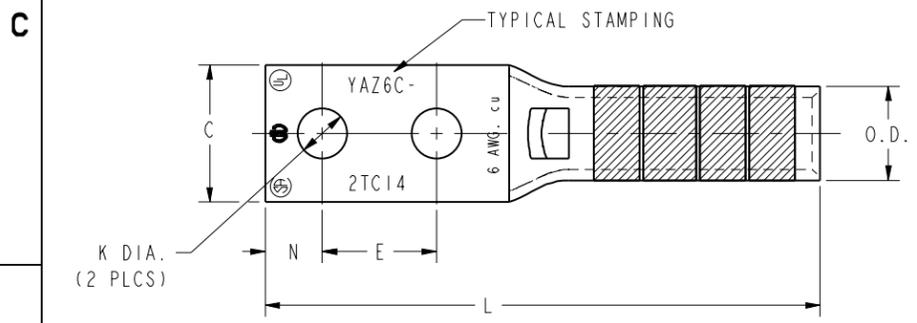

- NOTES:
- MATERIAL: COPPER TUBING.
 - FINISH: TIN PLATED
 - CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
 - CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
 - NAVY CABLE SIZE MAY BE OMITTED ON SOME SIZES BECAUSE OF SPACE LIMITATIONS.
 - PERMANENT DIE IN TOOLING.
 - DIMENSIONS, METRIC WIRE, & METRIC BOLT SIZES IN BRACKETS [] ARE IN MILLIMETERS. DIMENSIONS ARE ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
 - FOR USE BY CUSTOMERS THAT HAVE THIS HYPRESS™ NO NEW Y34A HYPRESS™ ARE BEING PROCESSED.
 - DO NOT USE PAT644 OR Y644 TOOLING WITH 6 AWG SOL.
 - THESE CATALOG NUMBERS CANNOT BE INSTALLED WITH Y45 TOOLING.

TO ORDER BURNDY® PRODUCTS CALL		HYLUG™	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: N/A	CAT. NO: YAZ6C-2TC- (SEE TABLE)
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: D. BOISVERT 11/11/98	CHECKER: K. HENRY 12/03/98
FOR PRODUCT INFO: http://www.burndy.com		DSN APPVL: B. MACDONALD 12/02/98	MFG APPVL: N/A
		GA APPVL: S. GARY 11/30/98	MKT APPVL: B. HARDGROVE 11/25/98
		PROD FAM: --	DRAWING NO: SE211915
		PROJECT #: --	SCALE: 4:1
		DOCUMENT TYPE: Sales	REV: E
		REL LEVEL: Released	SHEET 5 OF 36