


**065-79LXCWDMx1490 Singlemode Fiber Wave Division Multiplexing  
Small Form-factor Pluggable (SFP) 1.25 Gbps Single-Fiber Interface Modules**

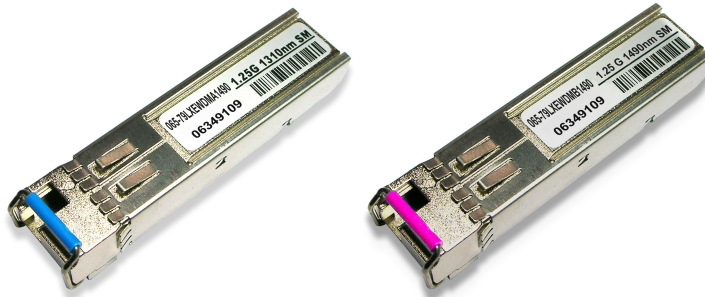

The Signamax 065-79LXCWDMx1490 models are Small Form-factor Pluggable (SFP) multimode fiber modules that support Gigabit Ethernet or SONET OC-12 over a single strand of singlemode fiber cable at distances up to 10 kilometers. There are two models in this series: one transmits at 1310 nm and receives at 1490 nm (model 065-79LXCWDMA1490), and the other transmits at 1490 nm and receives at 1310 nm (model 065-79LXCWDMB1490). These modules are designed to be used in pairs facing each other across a single stand of singlemode fiber. They are a cost-effective method of providing changeable Gigabit Ethernet or SONET OC-12 single-fiber singlemode interfaces to switches and media converters equipped with a standard SFP slot.

**Applications**

- Metro Access Rings
- Point-to-Point networking
- 1x Fiber Channel
- Gigabit Ethernet
- Suitable for Fast Ethernet and OC-12 transmission

**Key Features**

- RoHS Compliant
- Operation Temperature: -5~+70°C
- Model 065-79LXCWDMA1490: 1310 nm uncooled FP Laser Diode transmitter;1490 nm Photo Diode receiver
- Model 065-79LXCWDMB1490: 1490 nm uncooled DFB Laser Diode transmitter;1310 nm Photo Diode receiver
- 10 Km link distance (indicative only\*\*)
- Hot pluggable
- Metal enclosure, low EMI
- Single 3.3V power supply
- Low Power Dissipation

**Ordering Information**

Part Number	Description
065-79LXCWDMA1490	WDM 1.25 Gbps SFP Module Tx: 1310 nm / Rx: 1490 nm – SM/LC Simplex, 10 km
065-79LXCWDMB1490	WDM 1.25 Gbps SFP Module Tx: 1490 nm / Rx: 1310 nm – SM/LC Simplex, 10 km

**Summary Specification**

PART NUMBER	Tx / Rx Spectrum	Light Source	Link Power Budget	Typical Max. Distance**	Supply Voltage	Operating Temp.
<b>065-79LXCWDMA1490 (Blue Clasp)</b>	Tx: 1310 nm Rx: 1490 nm	FP Laser	13 dBm	10 km	3.3V	0 ~ 70 °C
<b>065-79LXCWDMB1490 (Violet Clasp)</b>	Tx: 1490 nm Rx: 1310 nm	DFB Laser	13 dBm	10 km	3.3V	0 ~ 70 °C

\*\* Maximum distances attainable on singlemode fiber circuits are dependent upon a circuit's conditions; i.e., the number of splices and patch panels and the number of bends in the circuit path. For comparison with competing products, please use the Link Power Budget for meaningful comparisons.

SPECIFICATIONS

**DETAILED SPECIFICATIONS**

• **ABSOLUTE MAXIMUM RATINGS, MODELS 065-79LXCWDMA1490 & 065-79LXCWDMB1490**

**Storage Temperature:** TS -40 -- 85 °C

**Supply Voltage:** V<sub>CC</sub> -0.5 -- 6.0 V

**Input Voltage:** VIN 0 – 5.5 V

**Operating Humidity:** 0-85 %

• **RECOMMENDED OPERATING CONDITIONS**

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Ambient Operating Temperature	T <sub>AMB</sub>	0		70	°C	
Supply Voltage	V <sub>CC</sub>	3.1	3.3	3.5	V	
Supply Current (3.3V)	I <sub>TX</sub> + I <sub>RX</sub>		200	300	mA	

• **TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS, MODEL 065-79LXCWDMA1490**

V<sub>CC</sub> = 3.1 V to 3.5V, T<sub>A</sub> = 0 °C to 70 °C

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Transmitter Differential Input Voltage	TD +/-	400		2000	mVp-p	A
Optical Output Power	P <sub>O</sub>	-9		-3	dBm	A
Optical Extinction Ratio	E <sub>R</sub>	9			dB	A
Center Wavelength	λ <sub>C</sub>	1280	1310	1355	nm	A
Spectral Width	Δλ			<4	nm	A
Optical Rise / Fall Time	t <sub>r</sub> / t <sub>f</sub>			0.25	nsec	A,B
Tx_Fault - High	V <sub>Fault H</sub>	2		V <sub>CC</sub>	V	A
Tx_Fault - Low	V <sub>Fault L</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.5	V	A
Tx_Disable - High	V <sub>Disable H</sub>	2		V <sub>CC</sub>	V	A
Tx_Disable - Low	V <sub>Disable L</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	A

**Note A:** All data measured at 1250 Mbps, PRBS 2<sup>7</sup>-1, NRZ.

**Note B:** 20% to 80%

• **TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS, MODEL 065-79LXCWDMB1490**

V<sub>CC</sub> = 3.1 V to 3.5V, T<sub>A</sub> = 0 °C to 70 °C

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Transmitter Differential Input Voltage	TD +/-	400		2000	mVp-p	A
Optical Output Power	P <sub>O</sub>	-9		-3	dBm	A
Optical Extinction Ratio	E <sub>R</sub>	9			dB	A
Center Wavelength	λ <sub>C</sub>	1280	1310	1355	nm	A
Spectral Width	Δλ			<4	nm	A
Optical Rise / Fall Time	t <sub>r</sub> / t <sub>f</sub>			0.25	nsec	A,B
Tx_Fault - High	V <sub>Fault H</sub>	2		V <sub>CC</sub>	V	A
Tx_Fault - Low	V <sub>Fault L</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.5	V	A
Tx_Disable - High	V <sub>Disable H</sub>	2		V <sub>CC</sub>	V	A
Tx_Disable - Low	V <sub>Disable L</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	A

**Note A:** All data measured at 1250 Mbps, PRBS 2<sup>7</sup>-1, NRZ.

**Note B:** 20% to 80%

**DETAILED SPECIFICATIONS (continued)**

• **RECEIVER ELECTRO-OPTICAL CHARACTERISTICS, MODEL 065-79LXCWDMA1490**

V<sub>cc</sub> = 3.1 V to 3.5V, T<sub>A</sub> = 0 °C to 70 °C


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Receiver Differential Output Voltage	RD +/-	600	800		mV <sub>P-P</sub>	
Receiver Overload	P <sub>IN</sub> MAX	-3			dBm	A,B
Receiver Sensitivity	P <sub>IN</sub> MIN			-22	dBm	A,B
Operating Center Wavelength	λ <sub>c</sub>	1480		1500	nm	
Receiver LOS Assert Level	P <sub>RX LOS A</sub>	-35			dBm	B
Receiver LOS Deassert Level	P <sub>RX LOS D</sub>			-22.5	dBm	B
Receiver Loss of Signal Hysteresis		0.5	2		dB	B
<b>Note A:</b> BER better than or equal to 1×10 <sup>-12</sup>						
<b>Note B:</b> Measured in the center of the eye opening with 2 <sup>7</sup> -1 PRBS, NRZ						

• **RECEIVER ELECTRO-OPTICAL CHARACTERISTICS, MODEL 065-79LXCWDMB1490**

V<sub>cc</sub> = 3.1 V to 3.5 V, T<sub>A</sub> = 0 °C to 70 °C

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Receiver Differential Output Voltage	RD +/-	600	800		mV <sub>P-P</sub>	
Receiver Overload	P <sub>IN</sub> MAX	-3			dBm	A,B
Receiver Sensitivity	P <sub>IN</sub> MIN			-22	dBm	A,B
Operating Center Wavelength	λ <sub>c</sub>	1260		1360	nm	
Receiver LOS Assert Level	P <sub>RX LOS A</sub>	-35			dBm	B
Receiver LOS Deassert Level	P <sub>RX LOS D</sub>			-22.5	dBm	B
Receiver Loss of Signal Hysteresis		0.5	2		dB	B
<b>Note A:</b> BER better than or equal to 1×10 <sup>-12</sup>						
<b>Note B:</b> Measured in the center of the eye opening with 2 <sup>7</sup> -1 PRBS, NRZ						

• **DIMENSIONS (mm), MODELS 065-79LXCWDMA1490 & 065-79LXCWDMB1490**

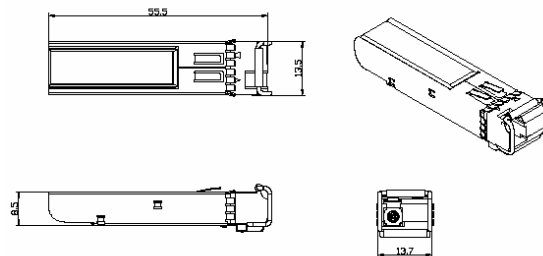

• **REGULATORY COMPLIANCE, MODELS 065-79LXEWDMA1490 & 065-79LXEWDMB1490**

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to optical connector	Variation of IEC 61000-4-2	Typically withstand at least 15kV without damage when port is contacted by Human Body Model probe.
Immunity	Variation of IEC 61000-4-3	Typically show no measurable effect from a 10 V/m field swept from 27 MHz to 1 GHz applied to the transceiver without a chassis enclosure.
Electromagnetic Interference (EMI)	FCC Class B CENELEC EN55022 Class B (CISPR 22A)	Margins are dependent on customer board and chassis design.
Laser Eye Safety	FDA21 CFR 1040.10 and 1040.11	Class 1 Laser Safety product.

[www.signamax.com](http://www.signamax.com)

16295 N.W. 13th Avenue • Miami, FL 33169 • 800.446.2377 • 305.944.7710 • Fax: 305.949.4483

Copyright 2008 Signamax, Inc./AESP, Inc. All rights reserved • Signamax Connectivity Systems is a trademark of AESP, Inc. • Specifications subject to change.

065-79LXCWDMx1490 10092008

SPECIFICATIONS