
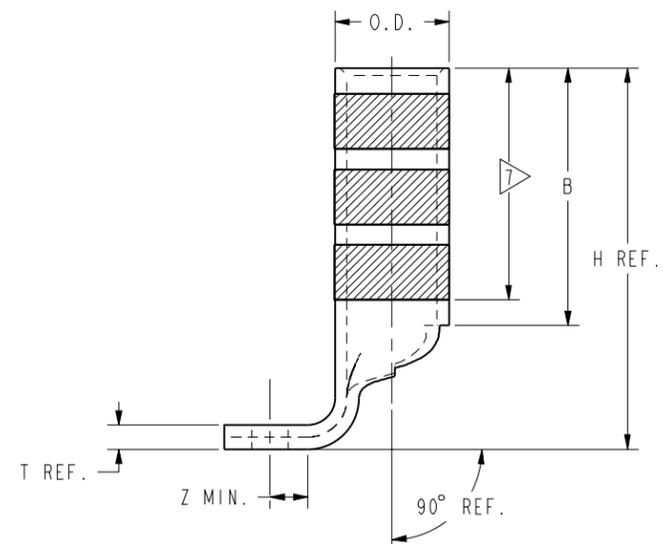
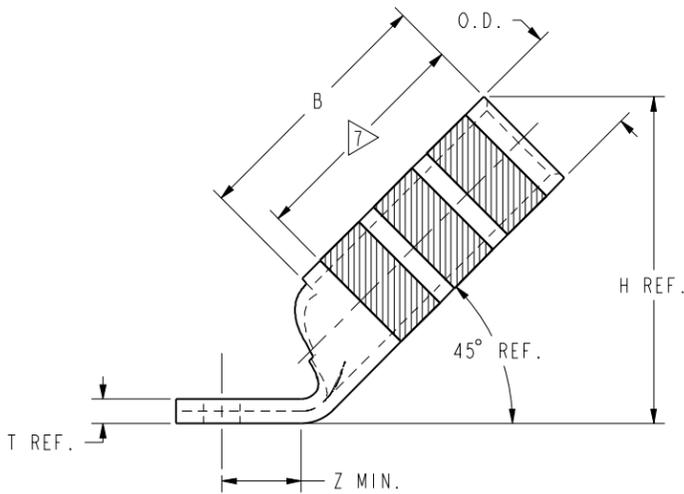
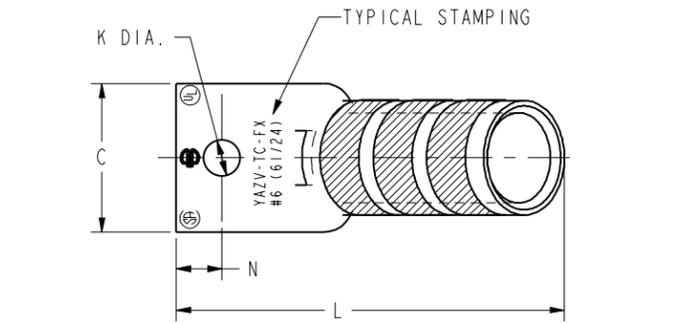
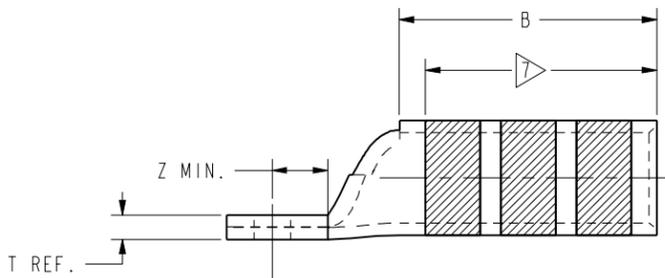


CATALOG NO.	CONDUCTOR		BOLT SIZE	FIG. NO.	DIMENSIONS								INSTALLATION TOOLING (# CRIMPS)															
	FLEX	CODE (AWG)			B ±.06	C ±.04	H MAX.	K DIA. +.02 -.01	L ±.09	N ±.03	O.D. ±.01	T REF.	Z MIN.	DIE INDEX	COLOR CODE	MECHANICAL			HYDRAULIC			DIELESS (# CRIMPS)	WIRE STRIP LENGTH					
																MD7-34R	OUR840	Y2MR 5	BCT500 Y500CT	Y750 Y35, PAT35 Y39, PAT750	Y46 4			Y45 3				
YAZV6CTC10FX	#6 WELD 61/24	#6 AWG	#10 [M5]	1	.75 [19]	.48 [12]	.95 [24]	.21 [5]	1.46 [37]	.25 [6]	.31 [8]	.08 [2]	.26 [7]	7 OR 374	BLUE	▽	▽	BLUE (2)	▽	U5CRT (2) 1	U5CRT (2) 1	U5CRT (2) 1	MECHANICAL: MY29- 11(1) HYDRAULIC: Y644, Y644M PAT644, Y644MBH (1)	13/16				
YAZV6CTC10FX45				2												1.00 [25]	1.38 [35]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)
YAZV6CTC10FX90 9				3												1.00 [25]	1.76 [45]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)
YAZV6CTC14FX	#6 WELD 61/24	#6 AWG	1/4 [M6]	1	.75 [19]	.58 [15]	.95 [24]	.41 [10]	1.66 [42]	.41 [10]	.31 [8]	.06 [2]	.42 [11]	7 OR 374	BLUE	▽	▽	BLUE (2)	▽	U5CRT (2)	U5CRT (2)	U5CRT (2)	MECHANICAL: MY29- 11(1) HYDRAULIC: Y644, Y644M PAT644, Y644MBH (1)	13/16				
YAZV6CTC14FX45				2												1.00 [25]	1.77 [45]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)
YAZV6CTC14FX90 9				3												1.00 [25]	1.77 [45]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)
YAZV6CTC38FX	#6 WELD 61/24	#6 AWG	3/8 [M10]	1	.75 [19]	.58 [15]	.95 [24]	.41 [10]	1.66 [42]	.41 [10]	.31 [8]	.06 [2]	.42 [11]	7 OR 374	BLUE	▽	▽	BLUE (2)	▽	U5CRT (2)	U5CRT (2)	U5CRT (2)	MECHANICAL: MY29- 11(1) HYDRAULIC: Y644, Y644M PAT644, Y644MBH (1)	13/16				
YAZV6CTC38FX45				2												1.00 [25]	1.77 [45]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)
YAZV6CTC38FX90 9				3												1.00 [25]	1.77 [45]	1.59 [40]	1.50 [38]	1.50 [38]	W5CVT X5CRT W5CRT (2)	X5CRT W5CVT (2)			W5CVT X5CRT W5CRT (2)	U5CRT (2)	U5CRT (2)	U5CRT (2)

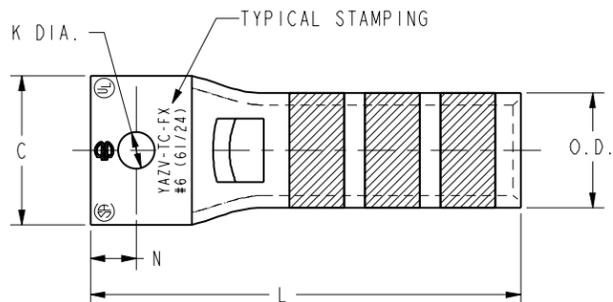

NOTES:

1. MATERIAL: COPPER TUBING.
2. FINISH: TIN PLATED
3. CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE " U " DIES IN Y45 SERIES TOOLS.
4. CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE " U " DIES IN Y46 SERIES TOOLS.
5. PERMANENT DIE IN TOOLING.
6. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS. DIMENSIONS ARE ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
7. OVERLAP 2 CRIMPS AS NEEDED WITHIN THE LENGTH BETWEEN THE INK STAMPED CRIMPING AREA.
8. UL LISTED AND CSA CERTIFIED CONNECTOR.
9. THESE CATALOG NUMBERS CANNOT BE INSTALLED WITH U5CRT DIE.

TO ORDER BURNDY® PRODUCTS CALL		HYLUGS™ (ONE HOLE FLEX)	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: --	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT NO: YAZV6C-TC- (TABLE)	
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: D. BOISVERT 08/22/00	
		CHECKER: J. MICHAUD 08/28/00	
		DSN APPVL: J. MICHAUD 08/21/00	
		MFG APPVL: --	
		QA APPVL: T. WATTS --	
		MKT APPVL: J. SYLVIA --	
		SCALE: 1:1	
		PROD FAM: CM&R COMPRESSION	
		DRAWING NO	
		PROJECT #: --	
		SIZE	
		DOCUMENT TYPE: Sales	
		REL LEVEL: Released	
		SE212448	
		SHEET 2 OF 16	

REV	DATE	DESCRIPTION	ECO	BY	C.H.K.
D	08/05/2015 11:26:00 AM	NOTE 9 ADDED	41185	BSB	RG