


760004267 | N-012-DS-8W-FSUYL

**Low Smoke Zero Halogen Riser Distribution Cable, 12 fiber single-unit**

## Representative Image

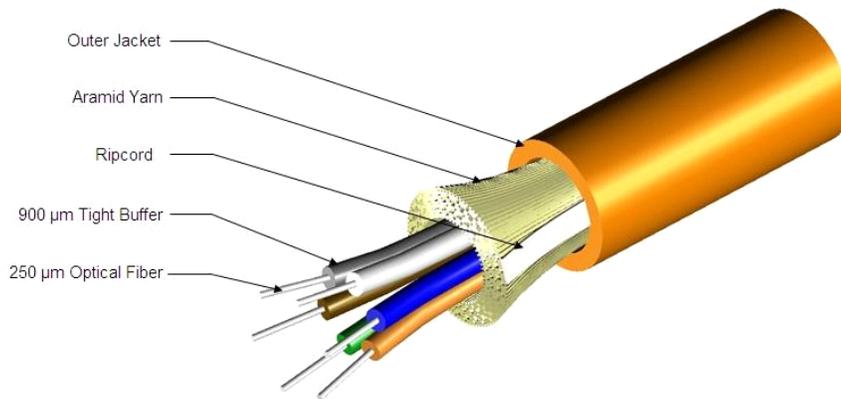

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber (G.652.D, G.657.A1)
Total Fiber Count	12
Fiber Type	TeraSPEED®, zero water peak singlemode fiber (G.652.D, G.657.A1)
Fiber Type, quantity	12
Jacket Color	Yellow

## Dimensions

Cable Weight	22.8 lb/kft   34.0 kg/km
Diameter Over Jacket	6.07 mm   0.24 in

## Physical Specifications

Minimum Bend Radius, loaded	9.1 cm   3.6 in
Minimum Bend Radius, unloaded	6.1 cm   2.4 in
Tensile Load, long term, maximum	45 lbf   200 N
Tensile Load, short term, maximum	150 lbf   667 N
Vertical Rise, maximum	500.0 m   1640.4 ft

760004267 | N012-DS-8W-FSUYL

## Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
-------------------------------	---------------------------------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

CS-8W-TB (Product Component—not orderable) — TeraSPEED® Singlemode Fiber

## \* **Footnotes**

---

Operating Temperature Specification applicable to non-terminated bulk fiber cable