

SG401-SF1SNM Ground plane omni, 0 dBd, 806-890 MHz

Also referred as: SRL401NM*1

- Rugged construction, light weight and easy to install
- Can be stocked for reuse due to it's broad band
- 2 clamps provided

The SG401 is a versatile antenna ideal for use where broadband unity gain omnidirectional coverage is needed.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	806 to 890
Connector		N-Male
Gain (nominal)	dBd (dBi)	unity (2.1)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Omni-directional
Horizontal beamwidth (typ)	degrees	360
Vertical beamwidth (typ)	degrees	80
Average Power Input (max)	W	100
Lightning protection		DC ground

Mechanical Specifications


Length/ Height	in (mm)	21 (533)
Base pipe diameter	in (mm)	0.75 (19)
Base pipe mounting length	in (mm)	8 (203)
Weight	lbs (kg)	1 (0.45)
Mounting Hardware (Included)		Clamp135
Actual shipping weight	lbs (kg)	5 (2.27)
Shipping dimensions	in (mm)	6x4x26 (152x102x660)

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Rated wind velocity (no ice)	mph (km/h)	150 (242)
Rated wind velocity (1/2" radial ice)	mph (km/h)	100 (161)
Lateral thrust (100 mph No Ice)	lbs (N)	12.3 (54.7)

Ordering Information

Specify frequency of operation.

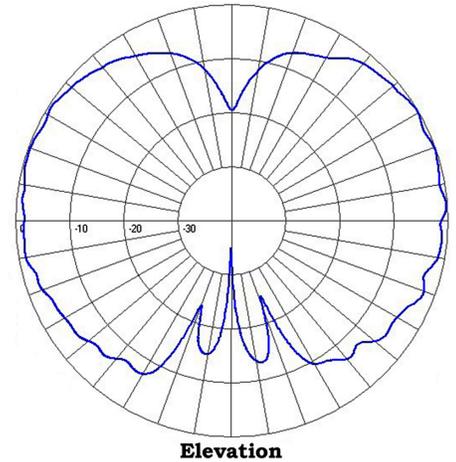

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com